


Portland, Maine



Yes. Life's good here.

March 9, 2016

AMATO'S ENTERPRISES INC

312 ST JOHN ST 2ND FL

PORTLAND, ME 04102

CBL: 401 A001001

Located at 1379 WASHINGTON AVE

NOTICE OF INTENT TO PROSECUTE

Dear Owner/Manager/Occupant,

An inspection of the property located at the address referenced above revealed that the structure and premises fail to comply with NFPA 2009 Fire Code and/or NFPA Life Safety Codes. Attached is a list of those violations.

The above-referenced property is in violation of the Chapter 10, Fire Prevention and Protection, Article 1 of the Portland City Code (the "Code") and National Fire Protection Association (NFPA) 101 Life Safety Code. Please note that the Code is available online at www.portlandmaine.gov.

This is a notice of intent to prosecute. As such, the matter is being referred to the City of Portland Corporation Council for legal action and possible civil penalties as provided for in Chapter 10, Fire Prevention and Protection, 10-25 of the Code and in Title 30- A.M.R.S.A. 4452.

Please be advised that you will need to contact the Fire Prevention Bureau at 207-874-8400 before the court date on the attached Reference to Court letter to either schedule a re-inspection or to submit a plan of action to correct these violations.

Sincerely,

A handwritten signature in black ink that reads "Daniel Petrucci".

Portland Fire Department

Fire Prevention Bureau

**CITY OF PORTLAND
PORTLAND FIRE DEPARTMENT**

380 Congress Street
Portland, Maine 04101

Inspection Violations

Owner/Manager AMATO'S ENTERPRISES INC		Inspector Raymond Smith	Inspection Date 3/8/2016
Location 1379 WASHINGTON AVE	CBL 401 A001001	Status Failed	Inspection Type Fire Company-FP Routine Inspec

Code	Int/Ext	Floor	Unit No.	Area	Compliance Date
------	---------	-------	----------	------	-----------------

1) 69.05

Violation: PORTLAND FIRE DEPARTMENT CHAPTER 10 4.3.1, 4.3.2 BUILDING ADDRESS NOT MARKED ON BUILDING; 4.3.1 Signs shall be located in a position readily visible as approaching from the main access and approved by the Fire Department. Signs shall be illuminated or retro reflective on a contrasting background and the letter(s) size shall be approved by the Fire Department.

4.3.2 Street Address shall be clearly marked on the front of the building and building sign as approved by the Fire Department.

Notes: NUMBERS NOT MARKED ON BUILDING OR SIGNAGE

2) 80.32

Violation: NFPA 101-7.10.9 TESTING AND MAINTENANCE EXIT SIGNS REQUIRE MAINTENANCE; 7.10.9.1 Inspections. Exit signs shall be visually inspected for operation of the illumination sources at intervals not to exceed 30 days.

7.10.9.2 Testing. Exit signs connected to, or powered with, a battery-operated emergency illumination source shall be tested and maintained in accordance with 7.9.3.

7.9.3 Periodic Testing of Emergency Equipment

7.9.3.1 Required emergency lighting systems shall be tested in accordance with one of the three options offered by 7.9.3.1.1, 7.9.3.1.2, or 7.9.3.1.3.

7.9.3.1.1 Testing of required emergency lighting systems shall be permitted to be conducted as follows:

(1) Functional testing shall be conducted monthly with a minimum of 3 weeks and a maximum of 5 weeks between tests, for not less than 30 seconds, except as otherwise permitted by 7.9.3.1.1(2).

(2) The test interval shall be permitted to be extended beyond 30 days with the approval of the authority having jurisdiction.

(3) Functional testing shall be conducted annually for a minimum 1-1/2 hours if the emergency lighting system is battery powered.

(4) The emergency lighting equipment shall be fully operational for the duration of the test required by 7.9.3.1.1(1) and (3).

(5) Written records of visual inspections and tests shall be kept by the owner for inspection by the authority having jurisdiction.

Notes: ONLY MAIN ENTRANCE HAD EXIT SIGN - OTHERS NONEXISTENT

**CITY OF PORTLAND
PORTLAND FIRE DEPARTMENT**

380 Congress Street
Portland, Maine 04101

Inspection Violations

Owner/Manager AMATO'S ENTERPRISES INC		Inspector Raymond Smith	Inspection Date 3/8/2016
Location 1379 WASHINGTON AVE	CBL 401 A001001	Status Failed	Inspection Type Fire Company-FP Routine Inspec

3) 81.10

Violation: PORTLAND FIRE DEPARTMENT CHAPTER 10 FIRE ALARM INSPECTION STICKER REQUIRED; Provide annual fire alarm inspection sticker at the annunciator. This sticker must be provided by a licensed master fire alarm company. A list of licensed master fire alarm companies can be found at: www.portlandmaine.gov/fireprevention.

Notes: HAS NOT BEEN SERVICED RECENTLY - NO STICKERS

4) 81.40

Violation: PORTLAND CHAPTER 10 CODE SECTION 12 KNOX BOX REQUIRED; KNOX BOXES ARE REQUIRED FOR ALL BUILDINGS WITH FIRE ALARM OR SUPPRESSION SYSTEMS.

Notes: NO KNOX BOX ON PROPERTY

5) 89.05

Violation: NFPA 1 EXCESSIVE/DISORDERLY STORAGE; REFERENCE NFPA 1 FOR EXCESSIVE FUEL-LOAD.

Notes: BASEMENT EXCESSIVE STORAGE OF COMBUSTIBLE MATERIALS

6) 91.20

Violation: NFPA 70- 590.6 EXTENSION CORDS; Ground-fault protection for personnel for all temporary wiring installations shall be provided to comply with 590.6(A) and (B). This section shall apply only to temporary wiring installations used to supply temporary power to equipment used by personnel during construction, remodeling, maintenance, repair, or demolition of buildings, structures, equipment, or similar activities.

Notes: USING EXTENSION CORD AS PERMENENT WIRING FOR FAN NEAR COMPRESSOR

7) 2.120

Interior

Cellar Stairs

Violation: NFPA 101- 8.3.5 HOLE IN WALL NEEDS REPAIR; The provisions of 8.3.5 shall govern the materials and methods of construction used to protect through-penetrations and membrane penetrations in fire walls, fire barrier walls, and fire resistance-rated horizontal assemblies. The provisions of 8.3.5 shall not apply to approved existing materials and methods of construction used to protect existing through-penetrations and existing membrane penetrations in fire walls, fire barrier walls, or fire resistance-rated horizontal assemblies, unless otherwise required by chapters 11 through 43.

Notes:

Comments: conducted fire inspection based on concerns passed on from e11. debris in basement and numerous violations were found and noted. Fire alarm system is monitored by seacoast security.

STATE OF MAINE

DISTRICT COURT

Location: Portland

Docket No.

CITY OF PORTLAND and body politic and
Corporate, located in the County of
Cumberland and State of Maine,

Plaintiff,

**FIRE PREVENTION AND PROTECTION
CODE VIOLATION**

(M.R. CIV. P. 80H AND 80k)


v.

Amato's Enterprises Inc.
Defendant

SUMMONS NUMBER: 354529

This matter has been referred to the Corporation Counsel's Office for immediate legal action with respect to the code violations detailed in the attached letter. It has been assigned the above summons number and will be filed with the Portland District Court and will be assigned for an initial appearance at the Portland District Court 205 Newbury Street Portland, Maine 04101 at 8:30 A.M. on 04/11/2016. Please contact Tori Ross in Fire Prevention at (207)-874-8400 or via e-mail at meservev@portlandmaine.gov to set up an in-person meeting to meet with somebody in the Fire Prevention Bureau to resolve these issues or make alternative arrangements to relieve you of the requirement to appear in Court on 04/11/2016.

Dated: 4/16/16

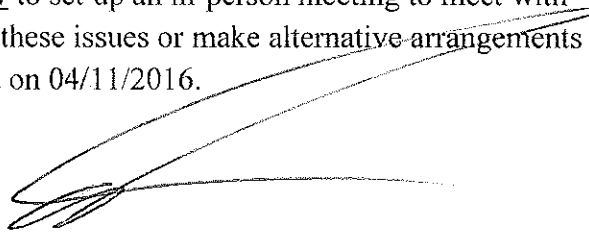

Adam R. Lee, Esq. Bar No. 4143
Associate Corporation Counsel
City of Portland
389 Congress St
Portland, ME 04101
207-874-8480