


- 1. THE MAXIMUM ALLOWABLE SIDEWALK AND CURB RAMP CROSS SLOPES SHALL BE 1.5 (1% MIN.). 2. THE MAXIMUM ALLOWABLE SLOPE OF ACCESSIBLE ROUTE EXCLUDING CURB RAMPS SHALL BE 5%. 3. THE MAXIMUM ALLOWABLE SLOPE OF ACCESSIBLE ROUTE AT CURB RAMPS SHALL BE 7.5%. 4. A MINIMUM OF 3 FEET CLEAR SHALL BE MAINTAINED AT ANY PERMANENT OBSTACLE IN ACCESSIBLE ROUTE (I.E., HYDRANTS, UTILITY POLES, TREE WELLS, SIGNS, ETC.).
- 5. CURB TREATMENT VARIES, SEE PLANS FOR CURB TYPE. 6. RAMP, CURB AND ADJACENT PAVEMENTS SHALL BE GRADED TO PREVENT PONDING.
- 7. SEE TYPICAL SIDEWALK SECTION FOR RAMP CONSTRUCTION. 8. WHERE ACCESSIBLE ROUTES ARE LESS THAN 5' IN WIDTH (EXCLUDING CURBING) A 5' x 5'
- PASSING AREA SHALL BE PROVIDED AT INTERVALS NOT TO EXCEED 200 FEET. 9. ELIMINATE CURBING AT RAMP WHERE IT ABUTS ROADWAY, EXCEPT WHERE VERTICAL CURBING IS
- INDICATED ON THE DRAWINGS TO BE INSTALLED AND SET FLUSH. 10. DETECTABLE WARNINGS SHALL CONTRAST VISUALLY WITH ADJOINING SURFACES. 11. DETECTABLE WARNINGS SHALL BE INSTALLED PERPENDICULAR TO THE ACCESSIBLE ROUTE.
- 12. CONTRACTOR TO SUBMIT R.F.I. FOR THIS TYPE OF ACCESSIBLE CURB RAMP FOR APEX ROADWAY CROSSINGS.

Accessible Curb Ran	np (ACR)	- Type 'B-D	' (On-Site)	9/13
N.T.S.	Source:	VHB	REV	LD_501

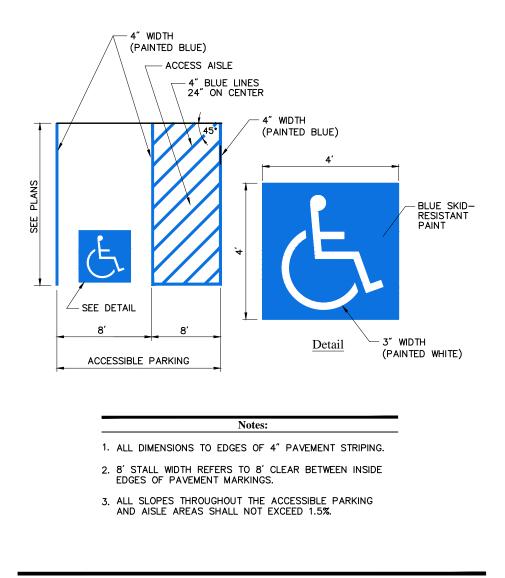

1½" HOT MIX ASPHALT

2%" HOT MIX ASPHALT

- 12" CRUSHED GRAVEL

- COMPACTED SUBGRADE

Standard Duty Flexible Pavement

Note:

MATERIALS SHALL CONFORM TO MAINEDOT STANDARD SPECIFICATIONS, LATEST ISSUE.

Source: VHB

 \circ


Bituminous Concrete Pavement Section

N.T.S.

MAINEDOT 703.06, TYPE A

(12.5 MM NOMINAL MAXIMUM SIZE)

(19.0 MM NOMINAL MAXIMUM SIZE)

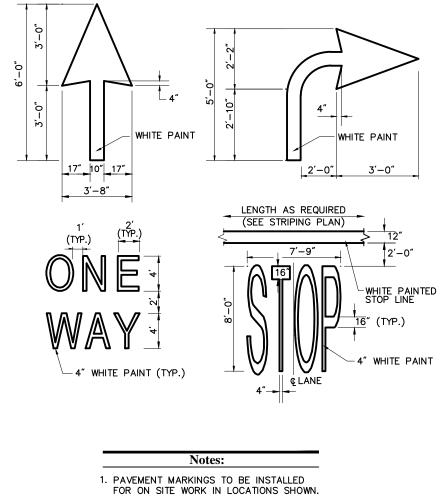

Accessible Parking Space		
N.T.S.	Source:	VHB


12/11


REV LD_430

Painted Pavement Markings - On Site N.T.S. Source: VHB

6/08 LD_554 Speed Bump N.T.S.

ABUTS ROADWAY. N.T.S.

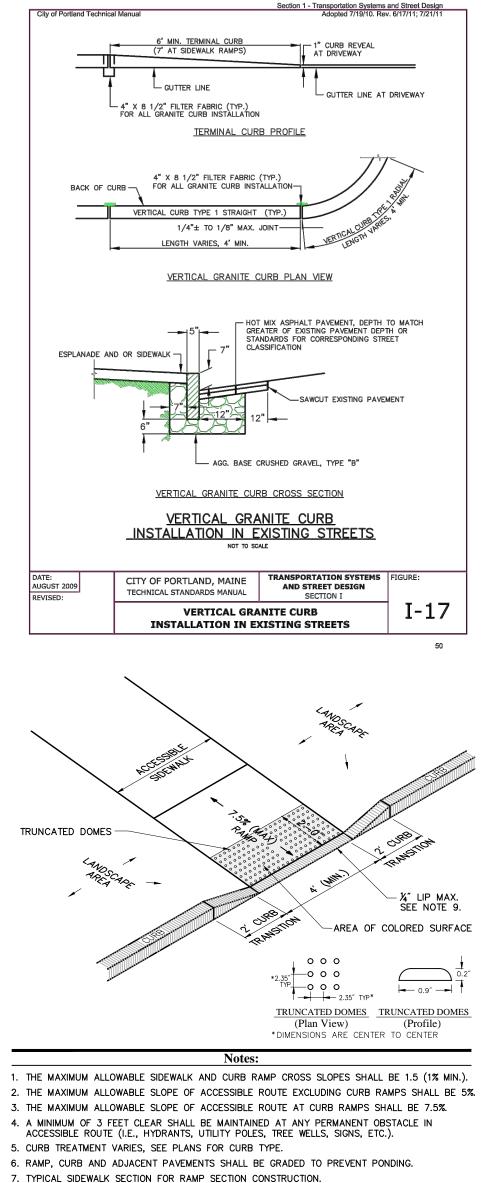



10. DETECTABLE WARNINGS SHALL CONTRAST VISUALLY WITH ADJOINING SURFACES. 11. DETECTABLE WARNINGS SHALL BE INSTALLED PERPENDICULAR TO THE ACCESSIBLE ROUTE.

Accessible Curb Ramp (ACR) Type 'M-D' (On-Site) 11/10 Source: VHB REV LD_512

Proposed Taco Bell

1363 Washington Avenue Portland, Maine

1 RESPONSE TO STAFF COMMENTS 3/2/16 2 FINAL PERMIT PLANS 5/4/16	No.	Revision	Date	Appvd.
<u></u>	1	RESPONSE TO STAFF COMMENTS	3/2/16	
	2	FINAL PERMIT PLANS	5/4/16	
3 ISSUED FOR BUILDING PERMIT $7/6/16$	$\boxed{3}$	ISSUED FOR BUILDING PERMIT	7/6/16	

2 Bedford Farms Drive

Bedford, NH 03110

Suite 200

603.391.3900

Designed by	Checked by
Issued for	Date
Construction	Jan. 4, 2016

