
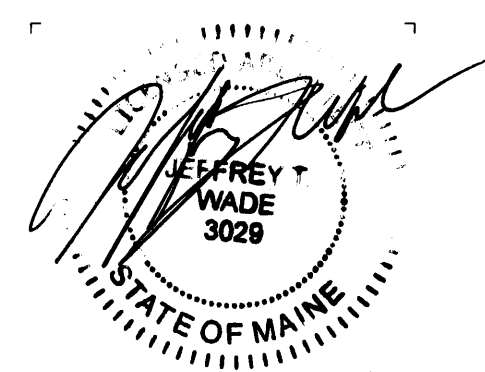


**1** DEMOLITION PLAN  
 SCALE: 1/8"=1'-0"

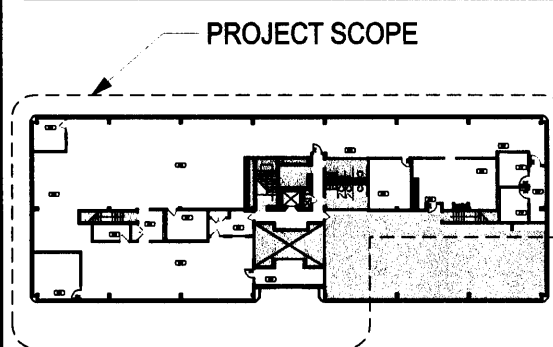

311 SUMMER STREET BOSTON, MA 02210 617.234.3100

ISSUANCES		
No.	Description	Date
1	ISSUED FOR PERMIT	12/23/08

**DEMOLITION PLAN LEGEND**

	EXISTING PARTITION TO BE REMOVED		OUTLET: DUPLEX, EXISTING TO REMAIN		FEED - WALL: POWER, EXISTING TO BE RE-WIRED AS INDICATED ON IA-302 # INDICATES QTY. OF POWERED WORKSTATIONS
	EXISTING PARTITION TO REMAIN		OUTLET: QUADRUPLEX, EXISTING TO REMAIN		OUTLET: DUPLEX, EXISTING TO BE REMOVED
	EXISTING DOOR AND FRAME TO BE REMOVED		OUTLET: VOICE/DATA, EXISTING TO REMAIN		OUTLET: QUADRUPLEX, EXISTING TO BE REMOVED
	EXISTING DOOR TO REMAIN		OUTLET: VOICE/DATA, EXISTING TO BE REMOVED		SWITCH, EXISTING TO REMAIN
	EXISTING SIDE LIGHT TO BE REMOVED		SWITCH, EXISTING TO BE REMOVED		FEED - WALL: SIGNAL, EXISTING TO REMAIN # INDICATES QTY. OF POWERED WORKSTATIONS
	EXISTING SIDE LIGHT TO REMAIN		FEED - WALL: POWER, EXISTING TO REMAIN # INDICATES QTY. OF POWERED WORKSTATIONS		FEED - WALL: POWER, EXISTING TO BE REMOVED # INDICATES QTY. OF POWERED WORKSTATIONS
	EXISTING FLOORING TO BE REMOVED		FIRE ALARM DEVICE, EXISTING TO REMAIN		FIRE ALARM DEVICE, EXISTING TO BE REMOVED
	EXISTING 2' X 4' FLUORESCENT TO BE REMOVED		CARD READER, EXISTING TO REMAIN		CARD READER, EXISTING TO BE REMOVED
	EXISTING RETURN DIFFUSER TO BE REMOVED		FEED - WALL: SIGNAL, EXISTING TO BE RE-WIRED AS INDICATED ON IA-302 # INDICATES QTY. OF POWERED WORKSTATIONS		N.I.C.

**DEMOLITION PLAN NOTES**

- REMOVE FINISH FLOORING AND BASE, U.O.N.
- REMOVE ALL FLOORING MATERIAL, U.O.N.
- REMOVE FLOORING MATERIAL IN AREAS AS INDICATED. VERIFY LIMITS OF FLOORING REMOVAL IN FIELD.
- REMOVE ALL WINDOW TREATMENTS, U.O.N. OR PROTECT ALL EXISTING TO REMAIN WINDOW TREATMENTS, U.O.N.
- REMOVE ALL CORNER BEADS AT LOCATIONS WHERE NEW PARTITIONS ALIGN WITH EXISTING IN ORDER TO MAKE A SMOOTH TRANSITION.
- KEEP EXISTING ELECTRICAL OUTLETS, TELEPHONE & DATA OUTLETS, LIGHT SWITCHES & DEVICES IN PARTITIONS TO REMAIN U.O.N. REMOVE EXISTING ELECTRICAL OUTLETS, TELEPHONE & DATA OUTLETS, LIGHT SWITCHES & DEVICES AS INDICATED ON THE DEMOLITION PLAN
- PROVIDE TEMPORARY BARRICADES, AND OTHER FORMS OF PROTECTION, TO PROTECT OWNER'S PERSONNEL AND THE GENERAL PUBLIC AT AREAS OF SELECTIVE DEMOLITION. PROTECT ALL EXISTING TO REMAIN ITEMS. PROMPTLY REPAIR DAMAGE CAUSED TO ADJACENT EXISTING TO REMAIN ITEMS AND FACILITIES BY DEMOLITION WORK AT NO COST TO OWNER.
- ALL DEMOLITION SHALL BE LIMITED TO NON-STRUCTURAL ELEMENTS OF CONSTRUCTION, U.O.N.
- ALL BUILDING, ELECTRICAL, MECHANICAL, PLUMBING, ETC. SHALL BE TERMINATED IN A SAFE AND PROPER MANNER BY A LICENSED PROFESSIONAL.
- REFER TO MEP/FP DRAWINGS FOR SCOPE OF MEP/FP DEMOLITION WORK.
- COORDINATE LIMITS OF DEMOLITION, WALLS TO REMAIN, ETC. WITH THE REST OF THE CONSTRUCTION DOCUMENTS.
- SALVAGE ALL FIRE ALARM DEVICES, THERMOSTATS, EXIT SIGNS & EGRESS DEVICES FOR RE-USE U.O.N.

**DEMOLITION PLAN KEYNOTES**

- ① GC TO REMOVE DOOR & FRAME & SALVAGE FOR RE-USE
- ② GC TO DEMO EXISTING MILLWORK
- ③ GC TO SALVAGE CARPET FROM OFFICE 204 FOR USE IN NEW CARPET LOCATIONS SEE FINISH PLAN, IA-402
- ④ REMOVE CARD READER DEVICE & SALVAGE FOR REUSE

Checked by: JE

**Demolition Plan Floor 2**

Drawing Scale: 1/8"=1'-0"  
 Job No. 08121.00

**ID-102**