GRAPHIC LEGEND

- GWB CEILING OR SOFFIT
- 2x2 FLUROSCENT LIGHT
- **101** ROOM NUMBER (Room name)
- PENDANT LIGHT
- **C3 / 9'-6"** CEILING TYPE / CEILING HEIGHT
- EXTERIOR RECESSED LED CAN
- EXP. EXPOSED TO STRUCTURE ABOVE
- EXTERIOR RECESSED LED CAN - 6"
- LED ROPE LIGHTING
- C SECURITY CAMERA, CEILING MOUNTED
- EXTERIOR EMERGENCY LIGHT
- C SECURITY CAMERA, WALL MOUNTED
- E BATHROOM FAN
- S CEILING MOUNTED SPEAKER
- HVAC SUPPLY
- EMERGENCY LIGHT
- HVAC RETURN
- M MOTION SENSOR
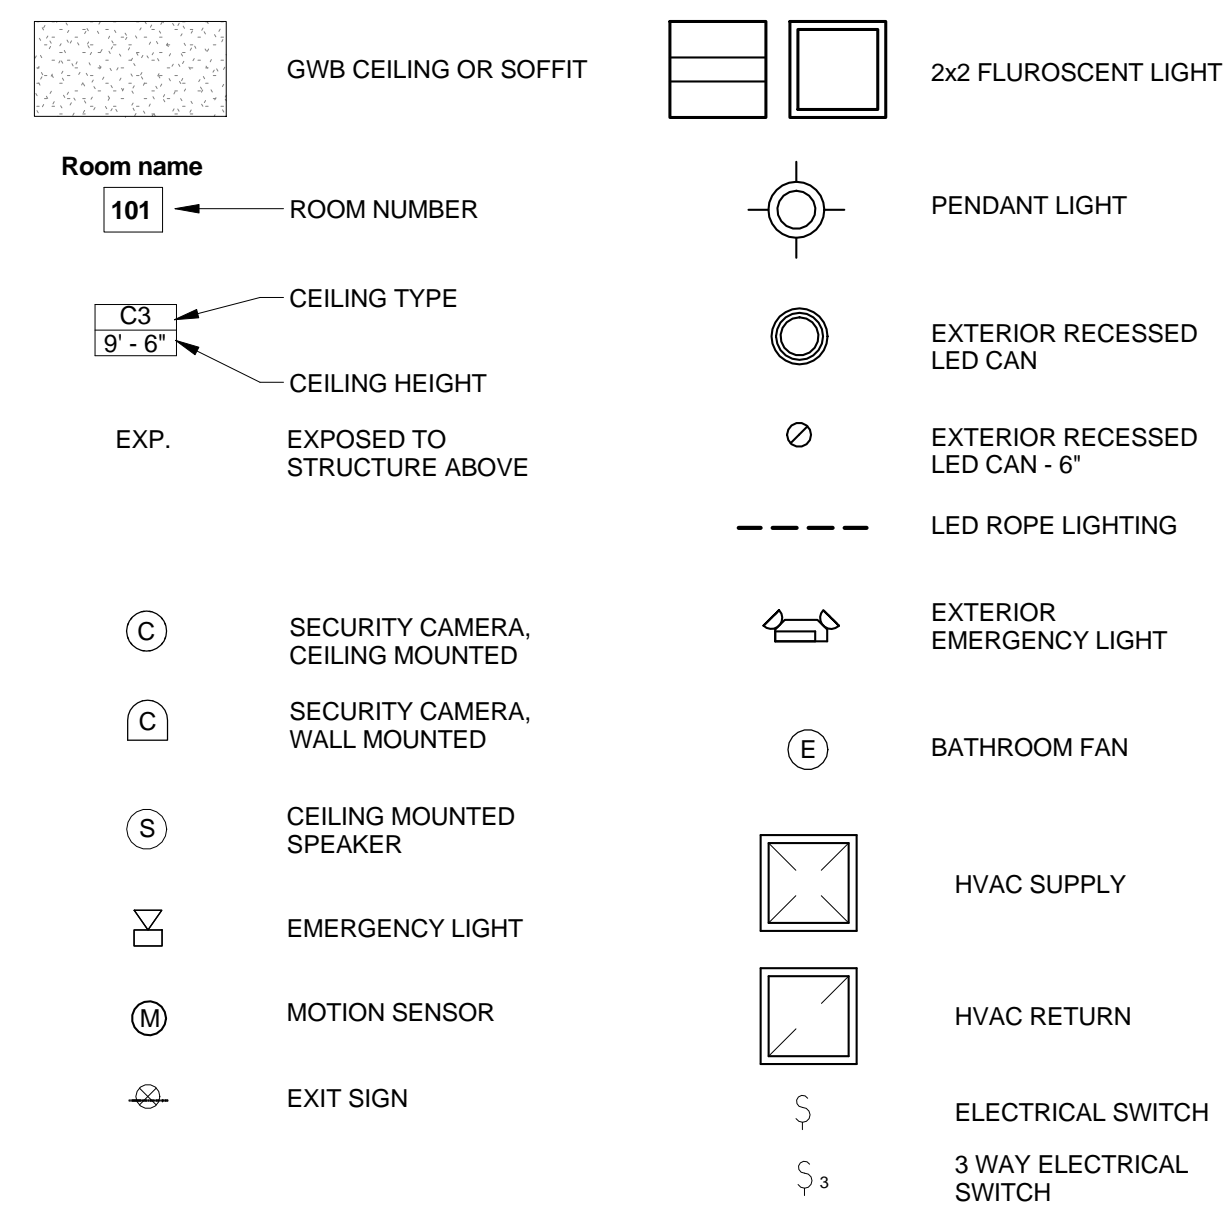- S ELECTRICAL SWITCH
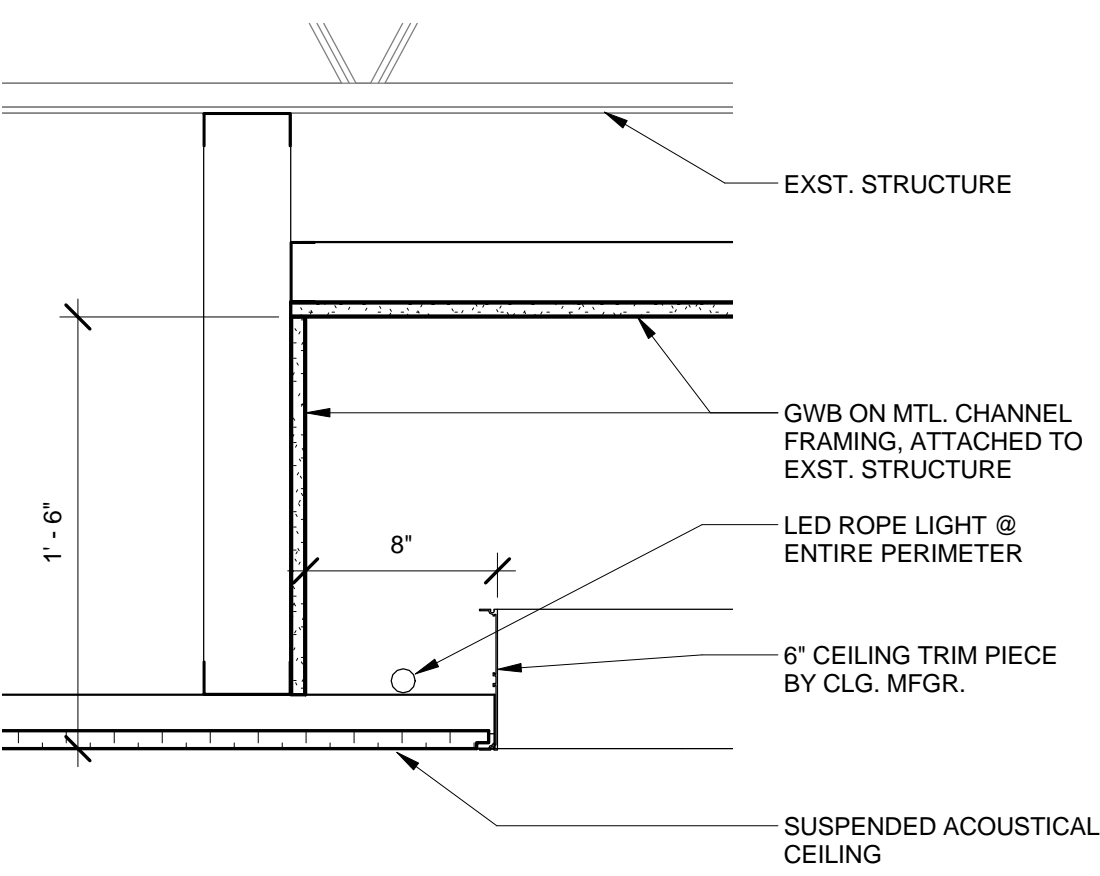- EXIT SIGN
- S₃ 3 WAY ELECTRICAL SWITCH

CEILING TYPES
- C1 - 2' X 2' ACOUSTIC CEILING TILE
- C2 - GWB ON MTL. CHANNELS
- C3 - METAL PANEL - 12" PANEL WITH 4" V GROOVES
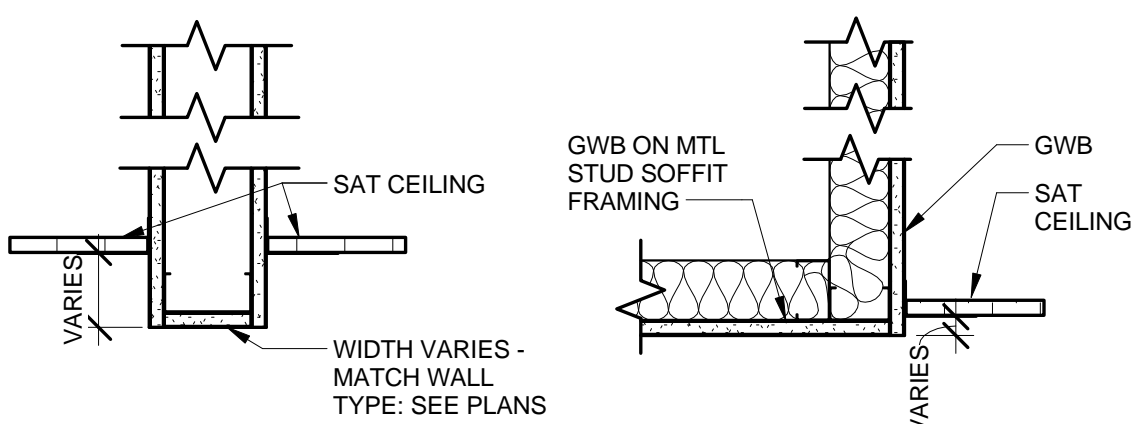- C4 - METAL PANEL - 12" SMOOTH

CEILING GENERAL NOTES

1. Ceiling plans do not show every fixture or component. Refer to electrical, plumbing, mechanical and structural drawings for extent of all ceiling penetrations and installations and coordinate prior to installation.

2. Center grid layout in all rooms unless noted otherwise.

3. All components mounted in or below a suspended acoustic ceiling shall be centered in the ceiling tile or in the 2x2 portion of tegular tiles. This shall include, but not be limited to, light fixtures, diffusers, speakers, and sprinkler heads.

4. Prior to the installation of ceilings, allow for an above-ceiling inspection of components that will not be visible when the ceilings have been installed.
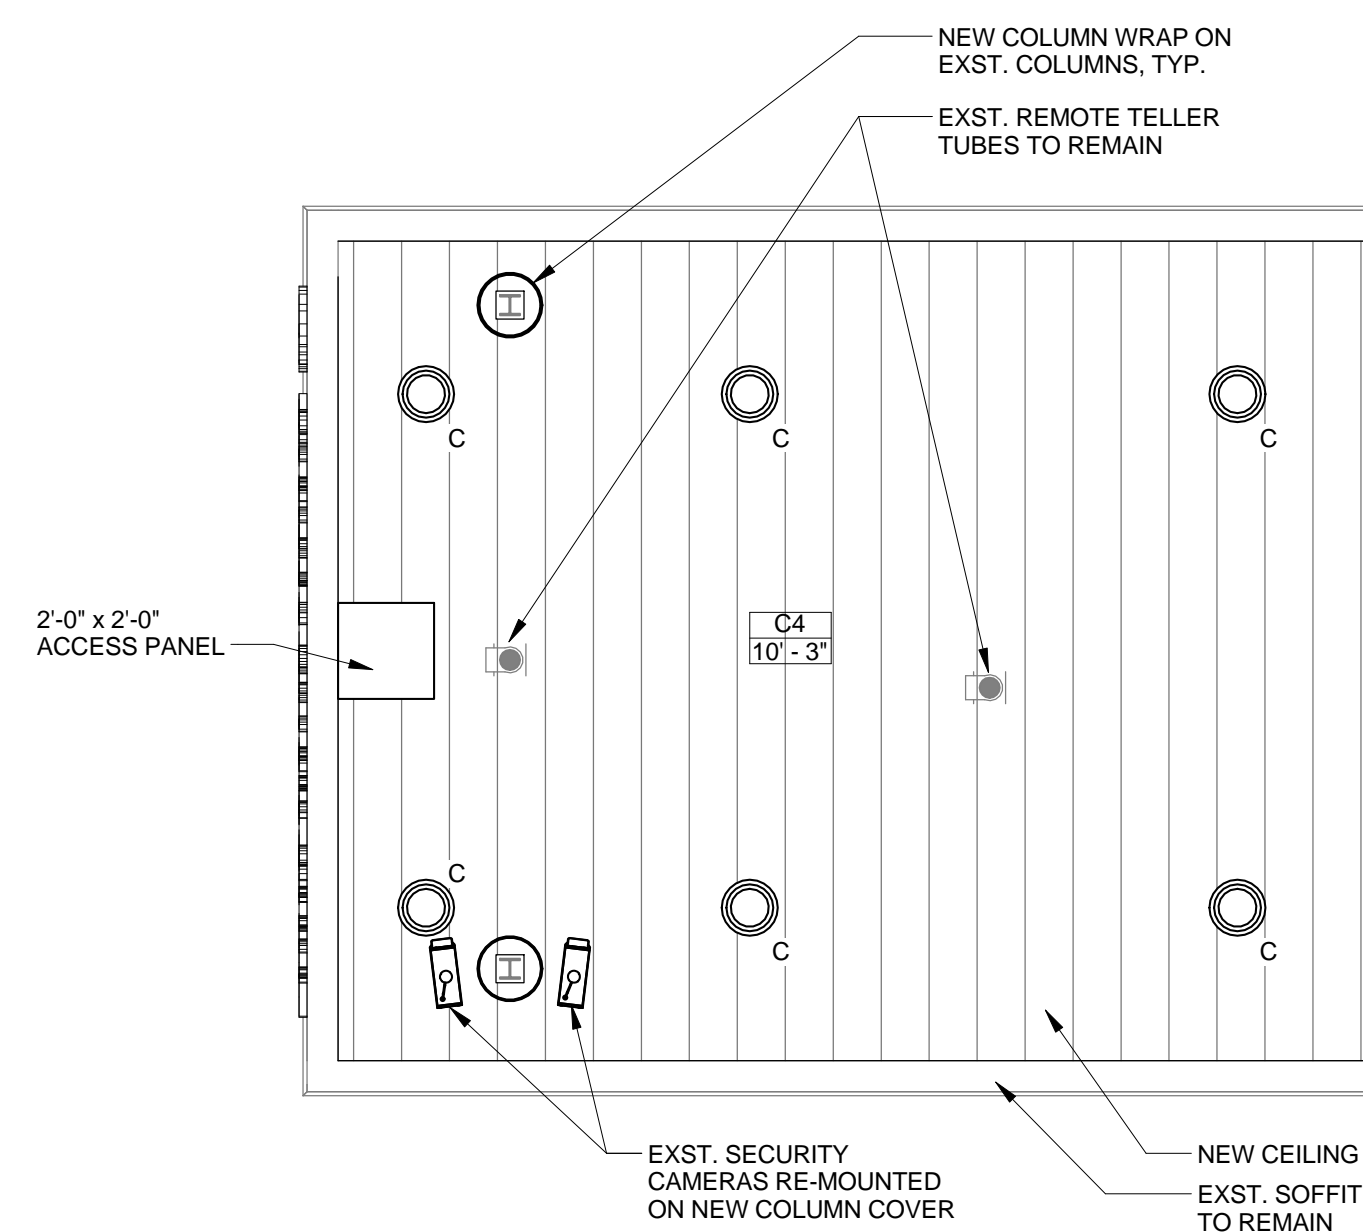
LIGHT FIXTURE TYPES

A — YLIGHTING
ITEM CODE: LPL-PH50
FINISH: 5741910535 - COCONUT WHITE
WATTAGE: 200
LAMP TYPE: INCANDESCENT

B — 6" DIA. EXTERIOR RECESSED CAN (CANOPIES)

C — 12" DIA. EXTERIOR RECESSED CAN (DRIVE-THRU)

D — EXTERIOR EMERGENCY LIGHTING

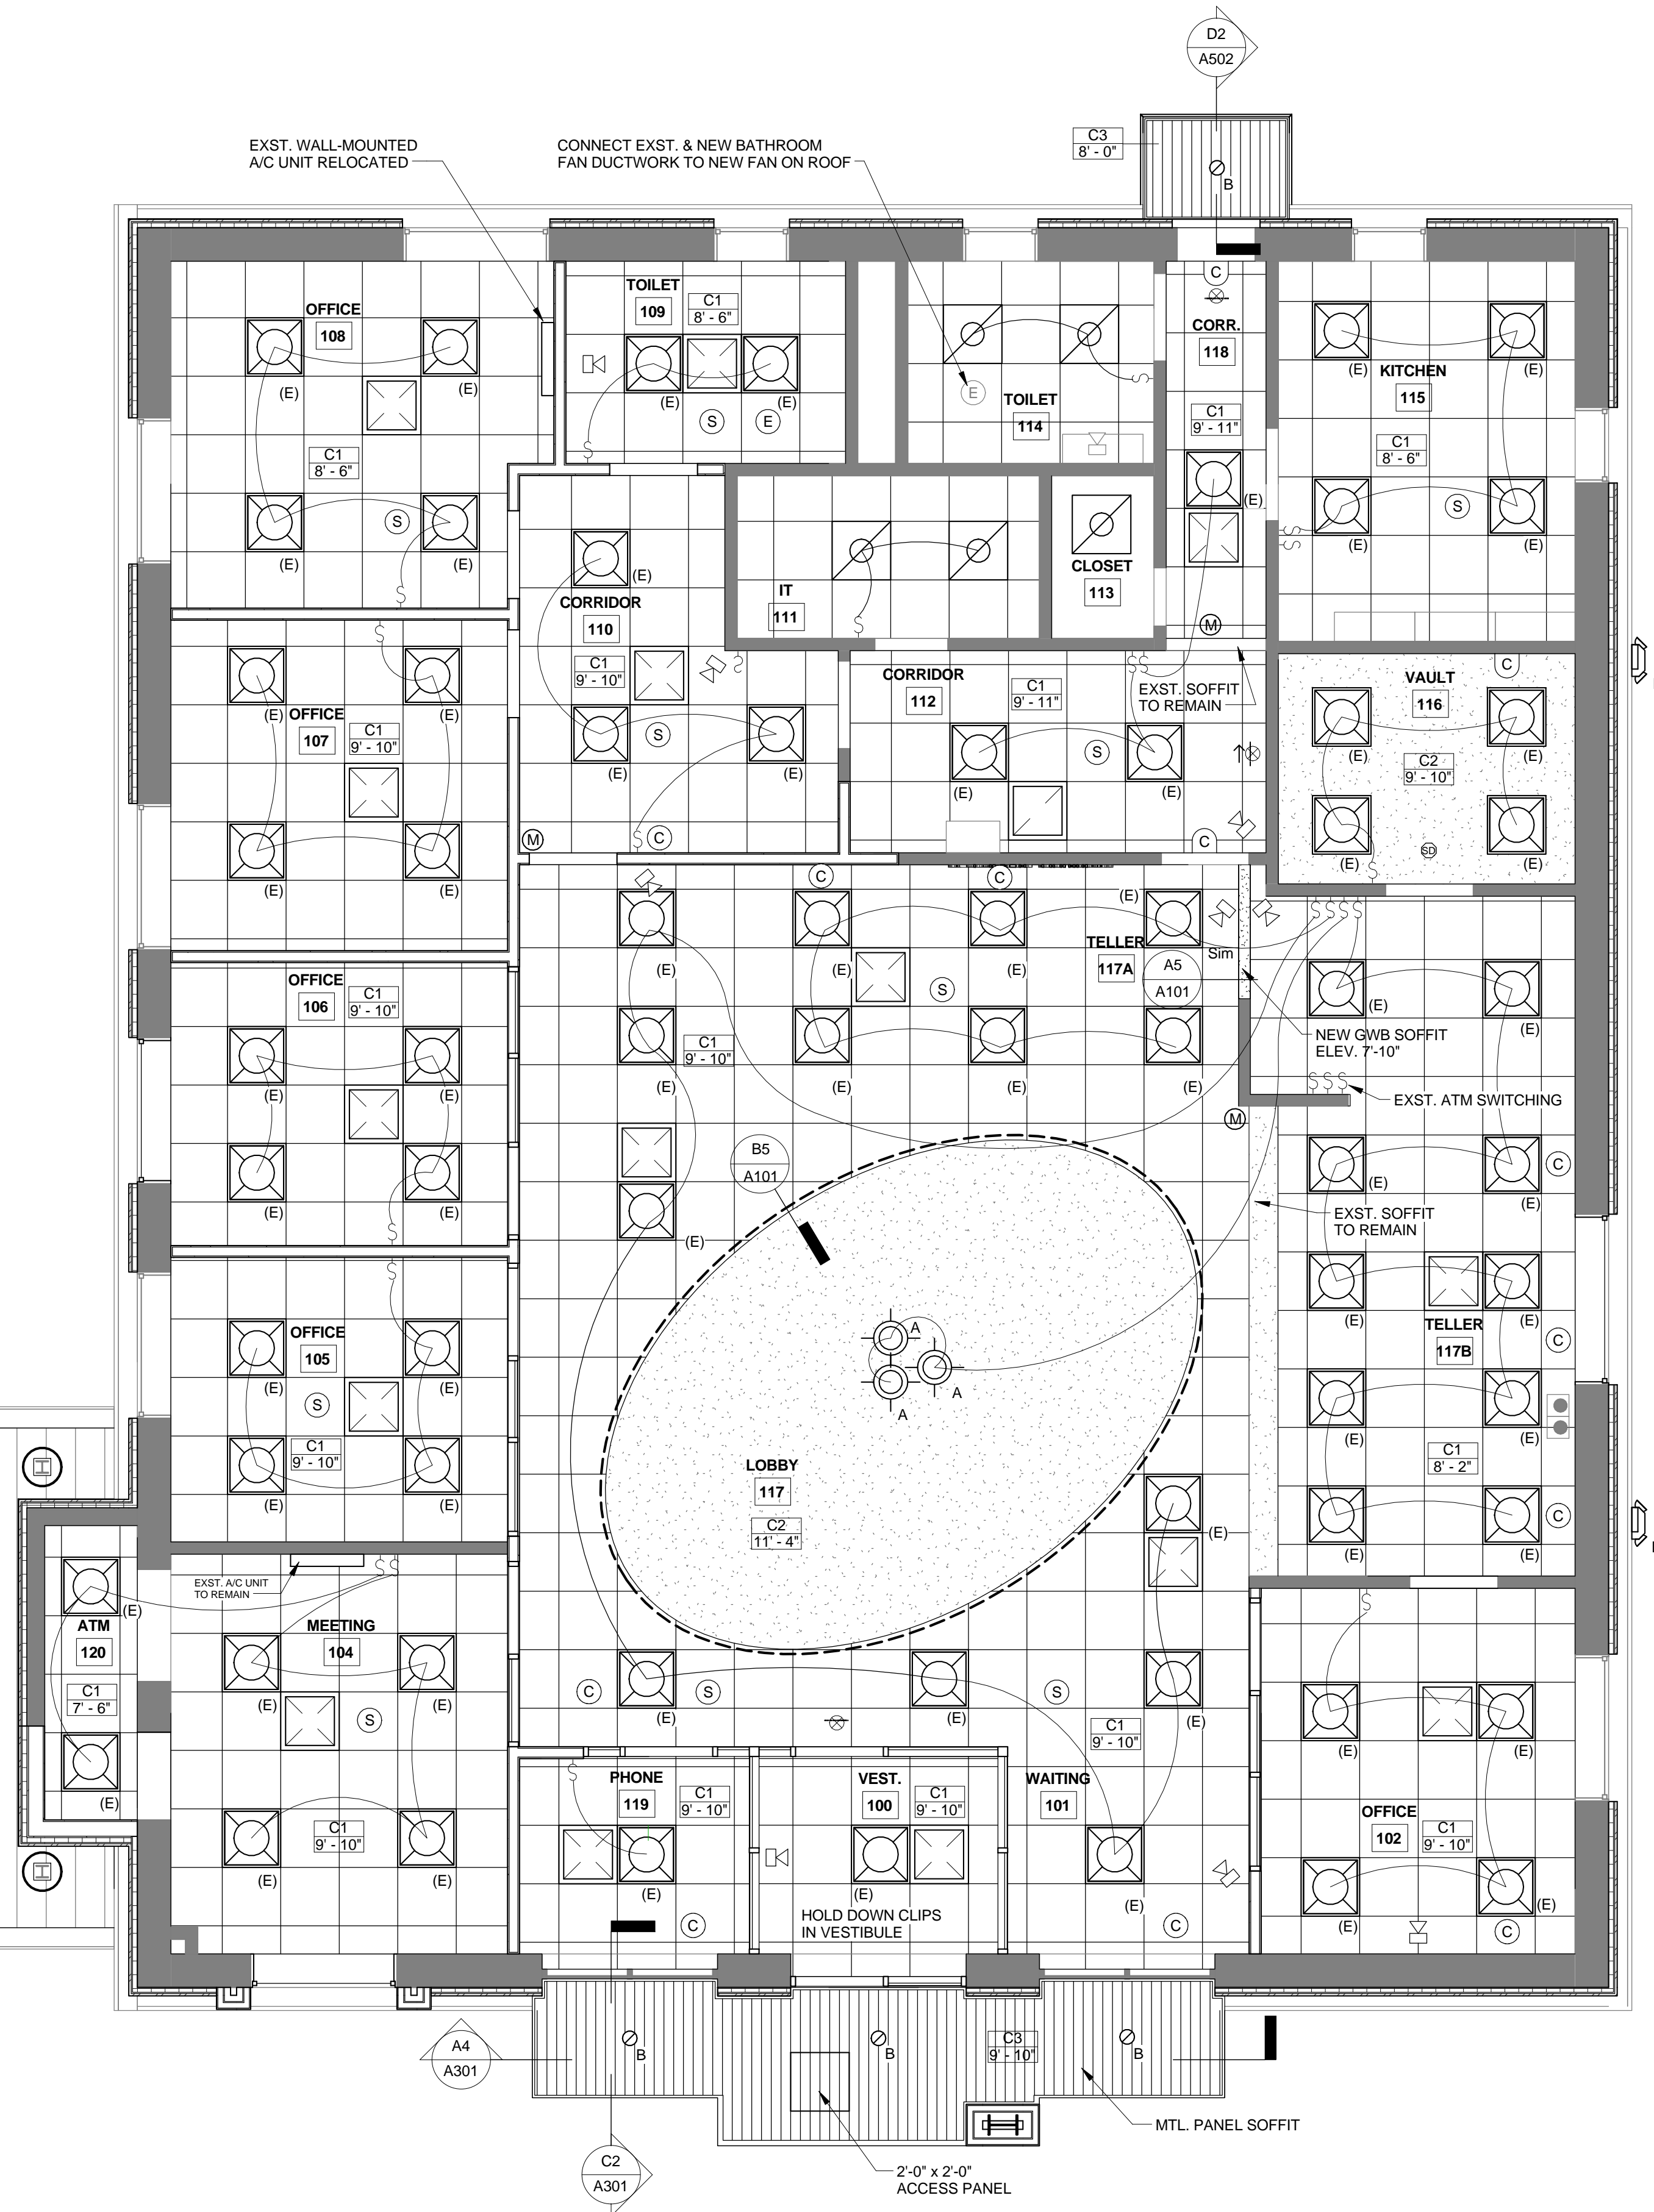(E) — EXISTING FIXTURE TO BE RE-USED AND/OR RELOCATED

CUMBERLAND COUNTY FEDERAL CREDIT UNION
1345 Washington Avenue, Portland, ME

JOB NO.
12044

DRWN. Author
CHECK Checker

SCALE:
As indicated

ISSUE
30 August, 2013

TITLE
REFLECTED CEILING PLAN

SHEET
A101

Ceiling Plan Rooms / Labels

- OFFICE 108 — C1 8'-6"
- TOILET 109 — C1 8'-6"
- CORR. 118 — C1 9'-11"
- KITCHEN 115 — C1 8'-6"
- TOILET 114
- IT 111
- CLOSET 113
- CORRIDOR 110
- CORRIDOR 112 — C1 9'-11"
- VAULT 116 — C2 9'-10"
- OFFICE 107 — C1 9'-10"
- OFFICE 106 — C1 9'-10"
- TELLER 117A — A5 A101
- TELLER 117B — C1 8'-2"
- OFFICE 105 — C1 9'-10"
- LOBBY 117 — C2 11'-4"
- ATM 120 — C1 7'-6"
- MEETING 104
- PHONE 119 — C1 9'-10"
- VEST. 100 — C1 9'-10"
- WAITING 101
- OFFICE 102 — C1 9'-10"
- C3 8'-0"
- C3 9'-10"

Notes on plan:
- EXST. WALL-MOUNTED A/C UNIT RELOCATED
- CONNECT EXST. & NEW BATHROOM FAN DUCTWORK TO NEW FAN ON ROOF
- NEW GWB SOFFIT ELEV. 7'-10"
- EXST. ATM SWITCHING
- EXST. SOFFIT TO REMAIN
- NEW COLUMN WRAP ON EXST. COLUMNS, TYP.
- EXST. REMOTE TELLER TUBES TO REMAIN
- 2'-0" x 2'-0" ACCESS PANEL
- C4 10'-3"
- EXST. SECURITY CAMERAS RE-MOUNTED ON NEW COLUMN COVER
- NEW CEILING
- EXST. SOFFIT TO REMAIN
- EXST. A/C UNIT TO REMAIN
- HOLD DOWN CLIPS IN VESTIBULE
- MTL. PANEL SOFFIT
- 2'-0" x 2'-0" ACCESS PANEL

A4 — FIRST FLOOR CEILING PLAN
1/4" = 1'-0"

B5 — DETAIL @ OVAL CEILING
1 1/2" = 1'-0"

Detail labels:
- EXST. STRUCTURE
- GWB ON MTL. CHANNEL FRAMING, ATTACHED TO EXST. STRUCTURE
- LED ROPE LIGHT @ ENTIRE PERIMETER
- 6" CEILING TRIM PIECE BY CLG. MFGR.
- SUSPENDED ACOUSTICAL CEILING
- 1'-6"
- 8"

A5 — TYPICAL DETAIL @ GWB SOFFITS
1 1/2" = 1'-0"

Detail labels:
- SAT CEILING
- GWB ON MTL STUD SOFFIT FRAMING
- GWB
- SAT CEILING
- WIDTH VARIES - MATCH WALL TYPE: SEE PLANS
- VARIES

TRUE NORTH / PLAN NORTH