


# Fixed skylights

Curb mounted - FCM

**No Leak Warranty**  
 For complete information visit [thenoleask skylight.com](http://thenoleask skylight.com)  
**VELUX flashing required**



Fixed curb mounted No Leak Skylight - FCM




Accessory tray is required for blind installation.

## Benefits:

- Integrated gaskets drain condensation to the outside.
- Streamlined exterior profile does not obstruct your roofline.
- A sunscreen accessory tray for standard site-built curbs allows for installation of VELUX Pick&Click!™ blinds

## Custom size fixed curb mounted skylights - Custom FCM

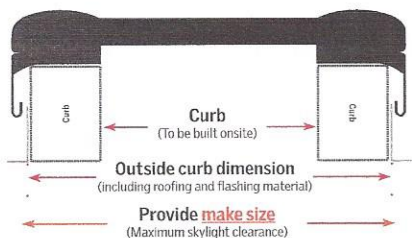

Make size (W-in. x L-in.)	Width 18 3/4-in. To 50 3/4-in.
Height 18 3/4-in. To 72-in.	Now delivered in 12 days or less
Height 72 1/4-in. To 76 1/2-in.	Now delivered in 20 days or less

We require maximum skylight clearance dimensions in 1/4-in. increments (0, 1/4, 1/2, 3/4) for width and height.

Note: Custom size flashing kits and custom size blinds are not available.  
 Note: Some specialty glass options require longer lead times.

Please call for pricing and availability: 1-800-888-3589

Model FCM	1430	1446	2222	2230	2234	2246	2270	3030	3046	3434	3446	4646
Outside curb (W-in. x H-in.)	17 1/2 x 33 1/2	17 1/2 x 49 1/2	25 1/2 x 25 1/2	25 1/2 x 33 1/2	25 1/2 x 37 1/2	25 1/2 x 49 1/2	25 1/2 x 73 1/2	33 1/2 x 33 1/2	33 1/2 x 49 1/2	37 1/2 x 37 1/2	37 1/2 x 49 1/2	49 1/2 x 49 1/2

Please reference the price list for a full description of all sizes and glass options.

# Manual "Fresh Air" skylights

Deck mounted - VS  
Curb mounted - VCM

**No Leak Warranty**  
For complete information visit [thenoleakskylight.com](http://thenoleakskylight.com)  
VELUX flashing required



Manual "Fresh Air" deck mounted No Leak Skylight - VS



Manual "Fresh Air" curb mounted No Leak Skylight - VCM

## Benefits:

- Factory pre-finished white frames and sashes provide a high quality finish that eliminates the need for secondary, high cost trips by a painter.
- Opens and closes manually with VELUX control rods when out of reach.
- Smooth turning handle for when the skylight is installed within reach. *(Sold separately)*
- Pre-mounted Pick&Click!™ system brackets make the installation of sunscreen blinds a snap.
- Replacement kits for FS and VS (ZZZ 238) This will allow the installer to use a standard size VELUX VS or FS skylight on a non-standard opening while minimizing the amount of interior trim work needed. *(see page 45)*

Model VS											
	14° - 85° 3:12 - 137:12	C01	C04	C06	C08	M02	M04	M06	M08	S01	S06
Rough opening (W-in. x H-in.)		21 x 26 7/8	21 x 37 7/8	21 x 45 3/4	21 x 54 7/16	30 1/16 x 30	30 1/16 x 37 7/8	30 1/16 x 45 3/4	30 1/16 x 54 7/16	44 1/4 x 26 7/8	44 1/4 x 45 3/4
Model VCM											
	0° - 60° 0:12 - 20:12	2222	2234	2246	3030	3046	3434	4646			
Outside curb (W-in. x H-in.)		25 1/2 x 25 1/2	25 1/2 x 37 1/2	25 1/2 x 49 1/2	33 1/2 x 33 1/2	33 1/2 x 49 1/2	37 1/2 x 37 1/2	49 1/2 x 49 1/2			

Please reference the price list for a full description of all sizes and glass options.