

City of Portland, Maine – Building or Use Permit Application 389 Congress Street, 04101, Tel: (207) 874-8703, FAX: 874-8716

Location of Construction: 177 Sherwood Street		Owner: Dorothy & Peter Scala		Phone: 775-1201		Permit No: 970482	
Owner Address:		Lessee/Buyer's Name:		Phone:		Business Name:	
Contractor Name:		Address:		Phone:		<div style="border: 2px solid black; padding: 5px; text-align: center;"> PERMIT ISSUED MAY 21 1997 </div>	
Past Use: Single Family Dwelling		Proposed Use: Same w/garage		COST OF WORK: \$ 5,500.00		PERMIT FEE: \$ 50.00	
				FIRE DEPT. <input type="checkbox"/> Approved <input type="checkbox"/> Denied		INSPECTION: <i>U</i> Use Group: <i>R3</i> Type <i>5 B</i> <i>BOCA 96</i> Signature: <i>[Signature]</i>	
Proposed Project Description: Construct garage as per plans				PEDESTRIAN ACTIVITIES DISTRICT (P.A.D.) Action: <input type="checkbox"/> Approved <input type="checkbox"/> Approved with Conditions <input type="checkbox"/> Denied Signature: _____ Date: _____		Zone: <i>R-5</i> CBL: 428-F-9-10 Zoning Approval: <i>[Signature]</i> 5/21/97 Special Zone or Reviews: <input type="checkbox"/> Shoreland <input type="checkbox"/> Wetland <input type="checkbox"/> Flood Zone <input type="checkbox"/> Subdivision <input type="checkbox"/> Site Plan maj <input type="checkbox"/> minor <input type="checkbox"/> mm <input type="checkbox"/>	
Permit Taken By: Vicki Dover		Date Applied For: May 19, 1997					


- This permit application does not preclude the Applicant(s) from meeting applicable State and Federal rules.
- Building permits do not include plumbing, septic or electrical work.
- Building permits are void if work is not started within six (6) months of the date of issuance. False information may invalidate a building permit and stop all work..

Call for 775-1201 P/U

PERMIT ISSUED WITH REQUIREMENTS

CERTIFICATION

I hereby certify that I am the owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his authorized agent and I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in the application is issued, I certify that the code official's authorized representative shall have the authority to enter all areas covered by such permit at any reasonable hour to enforce the provisions of the code(s) applicable to such permit


 SIGNATURE OF APPLICANT **Dorothy Scala** 177 Sherwood St, Portland 04103 775-1201 5/19/97
 ADDRESS: DATE: PHONE:

RESPONSIBLE PERSON IN CHARGE OF WORK, TITLE _____ PHONE: _____

White-Permit Desk Green-Assessor's Canary-D.P.W. Pink-Public File Ivory Card-Inspector

Zoning Appeal

Variance
 Miscellaneous
 Conditional Use
 Interpretation
 Approved
 Denied

Historic Preservation

Not in District or Landmark
 Does Not Require Review
 Requires Review

Action:

Approved
 Approved with Conditions
 Denied

Date: 5/19/97

[Signature]

CEO DISTRICT 6
m. Leahy

COMMENTS

6-1-97 Foundation check OK
2-16-91 Just level framed of garage

Inspection Record

	Type	Date
Foundation:	OK MY	6-1-97
Framing:		
Plumbing:		
Final:		
Other:		

City of Portland, Maine – Building or Use Permit Application 389 Congress Street, 04101, Tel: (207) 874-8703, FAX: 874-8716

Location of Construction: 177 Sherwood Street		Owner: Dorothy & Peter Scala		Phone: 775-1201	Permit No: 970482
Owner Address:		Lessee/Buyer's Name:		Phone:	Business Name:
Contractor Name:		Address:		Phone:	
Past Use: Single Family Dwelling		Proposed Use: Same w/garage		COST OF WORK: \$ 5,500.00	PERMIT FEE: \$ 50.00
		FIRE DEPT. <input type="checkbox"/> Approved <input type="checkbox"/> Denied		INSPECTION: <i>U.</i> Use Group <i>13</i> Type: <i>5B</i> <i>BOCA 90</i>	
Proposed Project Description: Construct garage as per plans		Signature:		Signature: <i>Huff</i>	
Permit Taken By: <i>Vicki Dover</i>		Date Applied For: <i>May 19, 1997</i>		PEDESTRIAN ACTIVITIES DISTRICT (P.A.D.) Action: <input type="checkbox"/> Approved <input type="checkbox"/> Approved with Conditions <input type="checkbox"/> Denied	
		Signature:		Date:	

PERMIT ISSUED
Permit Issued:
MAY 21 1997
CITY OF PORTLAND

Zone: CBL:
128-F-9-10

Zoning Approval:

Special Zone or Reviews:

Shoreland
 Wetland
 Flood Zone
 Subdivision
 Site Plan maj minor mm

Zoning Appeal

Variance
 Miscellaneous
 Conditional Use
 Interpretation
 Approved
 Denied

Historic Preservation

Not in District or Landmark
 Does Not Require Review
 Requires Review

Action:

Approved
 Approved with Conditions
 Denied

Date: _____

PERMIT ISSUED WITH REQUIREMENTS

CERTIFICATION

I hereby certify that I am the owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his authorized agent and I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in the application is issued, I certify that the code official's authorized representative shall have the authority to enter all areas covered by such permit at any reasonable hour to enforce the provisions of the code(s) applicable to such permit

177 Sherwood St, Portland 04103 775-1201 5/19/97



SIGNATURE OF APPLICANT *Dorothy Scala* ADDRESS: DATE: PHONE:

RESPONSIBLE PERSON IN CHARGE OF WORK, TITLE PHONE:

White-Permit Desk Green-Assessor's Canary-D.P.W. Pink-Public File Ivory Card-Inspector

CEO DISTRICT **6**
MM Leary


BUILDING PERMIT REPORT

DATE: 21 MAY 97 ADDRESS: 177 Sherwood ST.
REASON FOR PERMIT: To construct a detached garage 24'x26'
BUILDING OWNER: Peter & Dorothy Scala
CONTRACTOR: 
PERMIT APPLICANT: owner APPROVAL:  ~~DENIED~~

CONDITION(S) OF APPROVAL

- ~~1.~~ This permit does not excuse the applicant from meeting applicable State and Federal rules and laws.
 - ~~2.~~ Before concrete for foundation is placed, approvals from the Development Review Coordinator and Inspection Services must be obtained. (A 24 hour notice is required prior to inspection)
 3. Precaution must be taken to protect concrete from freezing.
 4. It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify that the proper setbacks are maintained.
 5. Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage side. (Chapter 4 Section 407.0 of the BOCA/1996)
 6. All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National Mechanical Code/1993) U.L. 103.
 7. Guardrail & Handrails A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42", except Use Group R which is 36". In occupancies in Use Group A, B, H-4, I-1, I-2 M and R and public garages and open parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would provide a ladder effect.
 8. Headroom in habitable space is a minimum of 7'6".
 9. Stair construction in Use Group R-3 & R-4 is a minimum of 10" tread and 7 3/4" maximum rise. All other Use group minimum 11" tread, 7" maximum rise.
 10. The minimum headroom in all parts of a stairway shall not be less than 80 inches.
 11. Every sleeping room below the fourth story in buildings of use Groups R and I-1 shall have at least one operable window or exterior door approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate tools. Where windows are provided as means of egress or rescue they shall have a sill height not more than 44 inches (1118mm) above the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches (610mm). The minimum net clear opening width dimension shall be 20 inches (508mm), and a minimum net clear opening of 5.7 sq. ft.
 12. Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it exits directly from the apartment to the building exterior with no communications to other apartment units.
 13. All vertical openings shall be enclosed with construction having a fire rating of at least one (1) hour, including fire doors with self closer's.
 14. The boiler shall be protected by enclosing with (1) hour fire-rated construction including fire doors and ceiling, or by providing automatic extinguishment.
 15. All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City's Building Code Chapter 9, Section 19, 920.3.2 (BOCA National Building Code/1996), and NFPA 101 Chapter 18 & 19. (Smoke detectors shall be installed and maintained at the following locations):
 - In the immediate vicinity of bedrooms
 - In all bedrooms
 - In each story within a dwelling unit, including basements
- In addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and I-1 shall receive power from a battery when the AC primary power source is interrupted. (Interconnection is required)

16. A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved type.
17. The Fire Alarm System shall be maintained to NFPA #72 Standard.
18. The Sprinkler System shall maintained to NFPA #13 Standard.
19. All exit signs, lights, and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023. & 1024. Of the City's building code. (The BOCA National Building Code/1996)
20. All construction and demolition debris must be disposed at the City's authorized reclamation site. The fee rate is attached. Proof of such disposal must be furnished to the office of Inspection Services before final Certificate of Occupancy is issued or demolition permit is granted.
21. Section 25-135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year".
22. The builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a certification from a design professional that the plans commencing construction of the facility, the builder shall submit the certification to the Division of Inspection Services.
23. This permit does not excuse the applicant from obtaining any license which may be needed from the City Clerk's office.
24. Ventilation shall meet the requirements of Chapter 12 Sections 1210. of the City's Building Code.
25. All electrical and plumbing permits must be obtained by a Master Licensed holders of their trade.




Samuel Hoises, Chief of Code Enforcement

cc: Lt. McDougall, PFD
Marge Schmuckal

50,000

S. P. Rankin Garages

177 Sherwood St
Scala,
Peter & Dorothy

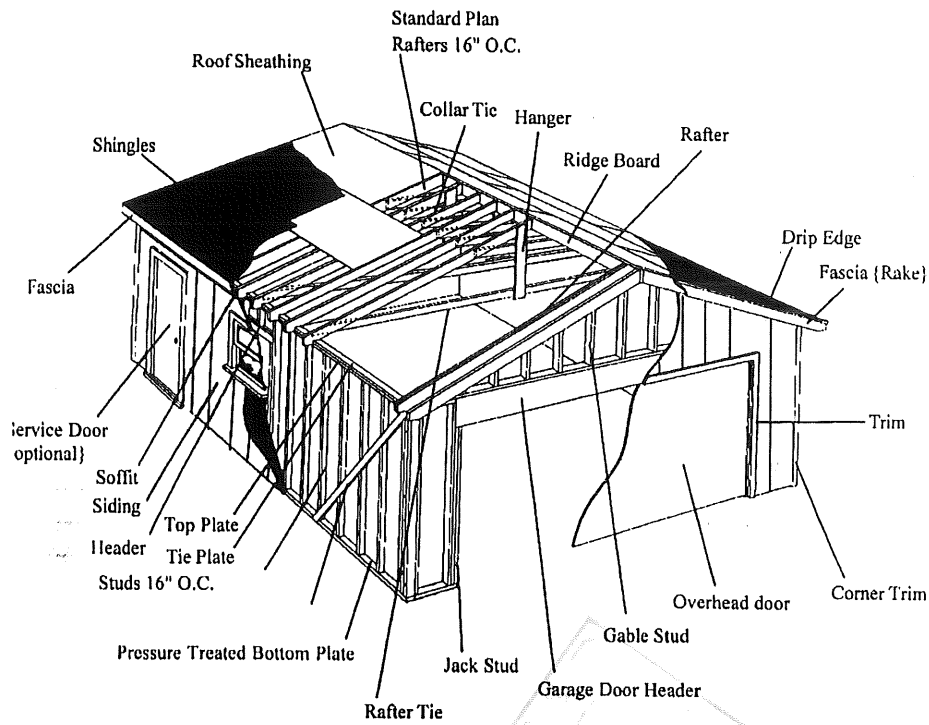

- Roof Sheathing - 1/2" plywood
- Rafters - 2"x6" 16" O.C.
- Collar Tie - 2"x4" *LEAVE OUT**
- Hanger - 2"x4" *
- Ridge Board - 2"x6"
- Drip Edge Galvanized
- Fascia - Pine
- Trim - Pine
- Gable Studs - 2"x4" *
- Garage Door Header - 2"x8"
- Jack Stud - 2"x4"
- Rafter Tie - 2"x6" 48" O.C.

- Bottom Plate - 2"x4" Pressure Treated
- Studs - 2"x4" 16" O.C
- Tie Plate - 2"x4"
- Top Plate - 2"x4"
- Window & Service Door Headers - 2"x6"
- Siding - T-111 5/8"
- Soffit - AC 3/8" Pine
- Shingles - Asphalt
- Roof Pitch - 5/12
- Windows - Double hung 24"x32" {optional}
- Service door - Steel insulated {optional}
- Overhead Doors - Wood or Steel

29" x 35"
2'6" x 6'6"

Applicant: Dorothy Scala
Address: 177 Sherwood St

Date: 5/21/97
C-B-L: 428-F-9 & 10

CHECK-LIST AGAINST ZONING ORDINANCE

Date - Existing 1931

Zone Location - R-5

Interior of corner lot - cor. E St.

Proposed Use/Work - New garage 24x26

Sewage Disposal -

Lot Street Frontage -

Front Yard - N/A

ok Rear Yard - 20' req - 15' shown - shall not be more 15' - using Section 14-A33

Side Yard - 15' req on side yard on side St - 20' shown

- Added 5' extra on side yard - is trying to get as close to house as possible without attaching

Projections -

Width of Lot -

Height -

Lot Area -

10,000 sq ft

Lot Coverage/ Impervious Surface -

40% of lot or 4,000 sq ft

Area per Family -

Off-street Parking -

Loading Bays -

Site Plan -

Shoreland Zoning/ Stream Protection -

Flood Plains -

14 x 24 = 336
24 x 28 = 672
8 x 14 = 112
10 x 24 = 240
New 24 x 26 = 624

1984 sq ft



Peter + Dorothy Scale
 177 Sherwood St.
 Portland, Maine
 04103
 775-1201

Lot 100 x 100 ft.