


Beam Layout Level 1

2. FOUNDATION SYSTEM

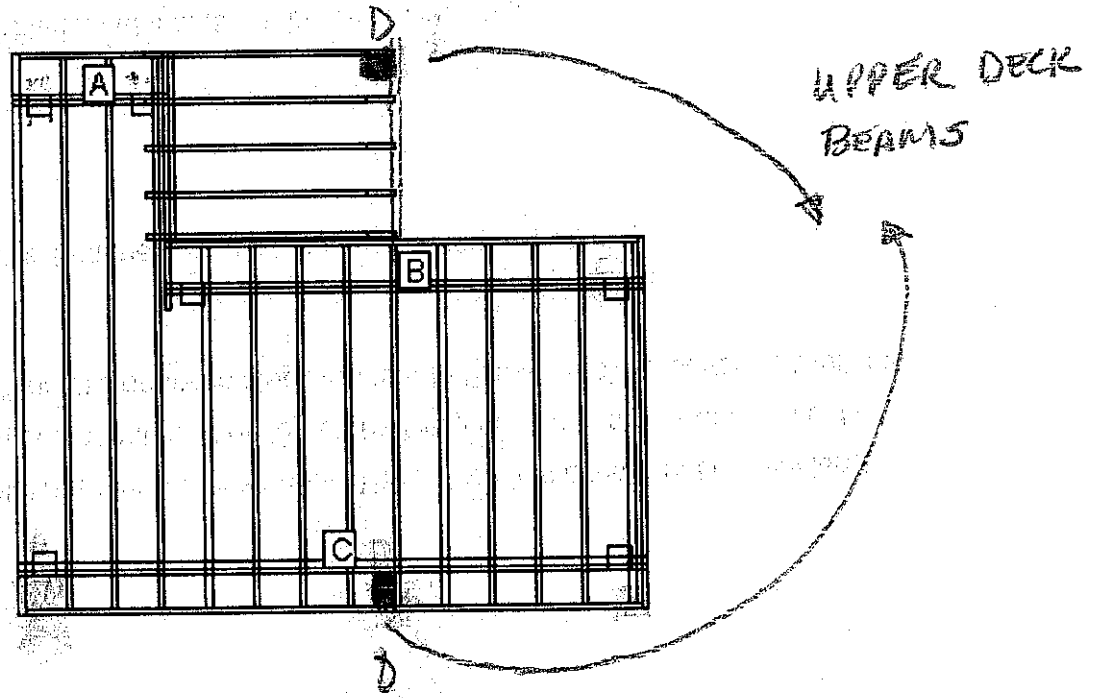

BEAM LABEL	BEAM LENGTH	POST COUNT	POST SPACING
A	3' 4 1/4"	2	2' 2 3/4"
B	10' 1 1/2"	2	9'
C	13' 4 1/4"	2	12' 2 3/4"
D (UPPER DECK)	12'	2	12'

1. 12" Quikrete Concrete Forming Tube 48" deep or to Solid Ledge per J. Bourke Review
2. USP Steel G185 Post Base 6"
3. 5/8" x 10" HDG Anchor Bolts
4. Posts are 6" x 6" #2 PT SYP
5. Beams Labelled UPPER DECK BEAMS support 8' x 12' upper deck & are 11'11" high
6. All other Beams support LOWER DECK and are 4' high