GENERAL DEMOLITION NOTES

1. THE CONTRACTOR SHALL BE RESPONSIBLE FOR FIELD VERIFYING THE LAYOUT AND DIMENSIONS OF EXISTING BUILDING FEATURES AND COORDINATING THEM WITH NEW WORK. THE CONTRACTOR SHALL ADVISE THE ARCHITECT OF ANY DISCREPANCIES BETWEEN FIELD CONDITIONS AND THE DOCUMENTS.

2. THE CONTRACTOR SHALL MAINTAIN ALL MECHANICAL, ELECTRICAL, LIGHTING, COMMUNICATIONS, PLUMBING, AND FIRE PROTECTION EQUIPMENT (INCLUDING PIPING, DUCTWORK, CONDUIT, AND WIRING) TO ALL SPACES EXISTING TO REMAIN. ANY INTERUPTION IN UTILITY SERVICE NESSESARY TO MAINTAIN OR SWITCH OVER SERVICES SHALL REQUIRE THAT THE OWNER BE PROVIDED 48 HOURS (TWO DAYS) ADVANCE NOTICE.

3. THE CONTRACTOR SHALL PATCH AND REPAIR ALL WALLS, FLOORS, CEILINGS, AND/OR OTHER ELEMENTS INTENDED TO REMAIN EXISTING THAT ARE DAMAGED DURING THE COURSE OF WORK AT NO ADDITIONAL COST TO THE OWNER.

4. WHERE NEW CONSTRUCTION ABUTS EXISTING CONSTRUCTION, FINISHED SURFACES OF NEW WALLS ARE TO BE ALIGNED WITH EXISTING FINISHED SURFACES UNLESS OTHERWISE INDICATED.


5. CRITICAL DIMENSIONS ARE NOTED (HOLD) DIMENSIONS NOTED "+/-" ARE FIELD ADJUSTABLE. GENERAL DIMENSIONS ARE TO BE HELD AND REQUIRE NOTIFICATION AND APPROVAL FROM ARCHITECT PRIOR TO ALTERING FOR ANY REASON.

6. DIMENSIONS NOTED "CLR" ARE MINIMUM REQUIRED DIMENSIONS FROM FINISHED SURFACE TO FINISHED SURFACE.

1. PLAN DIMENSIONS SHOWN ARE TYPICALLY TO THE FACE OF STUD, FACE OF EXISTING WALL OR CENTERLINE OF COLUMN.

8. CERTAIN ELEMENTS OF THE EXISTING BUILDING CONSTRUCTION THAT ARE INTENDED TO REMAIN IN THE FINISHED BUILDING CONSTRUCTION MAY BE LOOSENED, DISPLACED, OR OTHERWISE DAMAGED DURING THE COURSE OF PERFORMING THE WORK. THE CONTRACTOR SHALL, AS PART OF THE WORK, REPAIR, REMOVE, AND/OR REPLACE ANY AND ALL SUCH ELEMENTS LOOSENED, DISPLACED, OR OTHERWISE DAMAGED OR AS DETERMINED BY THE ARCHITECT.


9. NEW DUCT, PIPING, AND CONDUIT PENETRATIONS IN EXISTING CONSTRUCTION ARE INTENDED TO AVOID EXISTING FRAMING, UNLESS NEW FRAMING IS INDICATED. IF BEARING MEMBERS ARE ENCOUNTERED WHEN A PENETRATION IS BEING CUT, WORK ON THAT PENETRATION IS TO STOP PENDING RELOCATION OF THE PENETRATION BY ARCHITECT/ENGINEER.

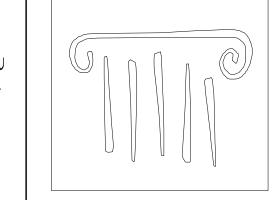

PORT - GITY ARCHITECTURE

65 NEWBURY STREET PORTLAND, ME 04101 207.761.9000 fax: 207.761.2010 info@portcityarch.com

-REMOVE EXISTING WALL AND ALL ASSOCIATED ITEMS AS REQUIRED FOR CONNECTION OF NEW ADDITION FREMOVE EXISTING WINDOWS REMOVE EXISTING WINDOWS AND EXTERIOR WALLS AS SHOWN AND EXTERIOR WALLS AS REMOVE EXISTING INTERIOR -REMOVE EXISTING DOORS, WALLS AND ALL ASSOCIATED -REMOVE EXISTING DOORS, FRAMES, AND ALL ASSOCIATED ITEMS, PATCH FLOOR AND CEILING FRAMES, AND ALL ASSOCIATED HARDWARE AS NECESSARY, TYP. HARDWARE REMOVE EXISTING WALL AND ALL ASSOCIATED ITEMS AS REQUIRED REMOVE EXISTING DOORS, -FOR CONNECTION OF NEW FRAMES, AND ALL ASSOCIATED ADDITION HARDWARE REMOVE EXISTING WINDOWS AND EXTERIOR WALLS AS SHOWN - REMOVE EXISTING WALL AND ALL ASSOCIATED ITEMS AS REQUIRED FOR CONNECTION OF NEW ADDITION

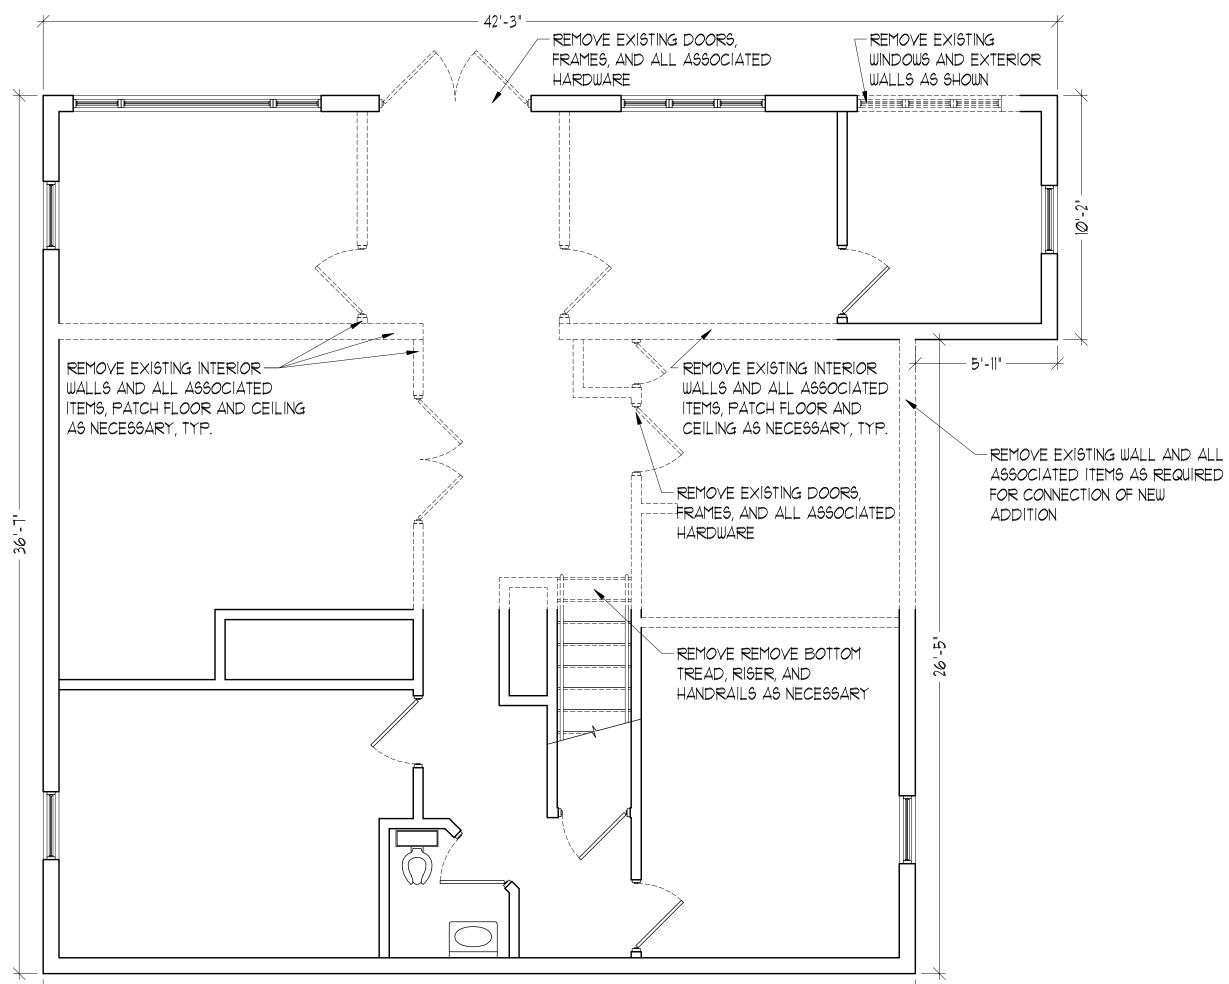

BANKS OFFICE BUILDING ADDITION AND RENOVATION 281 VERANDA STREET PORTLAND, MAINE

# DATE DESCRIPTION REVISIONS Date Issued 10.05.07

Project Number Ø7113 1/4" = 1'-0" Drawing Scale SHEET NAME

DEMOLITION PLANS

Drawn By

Checked By

MAIN LEVEL DEMOLITION PLAN

SCALE: 1/4" = 4'-0"

SCALE: 1/4" = 4'-0" COPYRIGHT: Reuse or reproduction of the contents of this document is not permitted without written permission of PORT CITY ARCHITECTURE PA

LOWER LEVEL DEMOLITION PLAN