



Reviewed for Code Compliance
 Permitting and Inspections Department
 Approved with Conditions

12/28/2018

**PO Box 943
 Portland, ME 04104**

www.richexteriorsolutions.com

Phone: 207 772-9822 Fax: 207 772-3807

Name / Address
Greg Perron 14 Woldbrook Dr Windham, ME 04062

Proposal

Date	Estimate #
7/26/2018	3403

Scope of Work	Total
Location - 26 Maplewood St. Portland, ME 04103 - Rich Exterior Solutions specialized in damage free tear offs- RES will tarp all landscaping before removal of construction debris - if necessary - Remove existing (2) double hung windows from opening - Furnish and install (2) Paradigm STERLES BELMONT Vinyl replacement Casement windows - To meet egress - Windows to be white with fake meeting rail to simulate double hung - Windows to have low e/argon glass - Windows to have full screens - Interior caulking and exterior caulking to be done by RES - Clean job site and remove all work related debris - Provide homeowner with material and workmanship warranties ----- 1/3 deposit due at acceptance, balance due at completion Any added work to framing to be charged at \$55.00 per man, per hour - plus material	2,610.00

Salesman

Total \$2,610.00

Accepted By: _____

We Look Forward to the Opportunity to Work with You



12/28/2018

Order #107267 Quotation

From
RICH EXTERIOR SOLUTIONS
 123 GRAY ROAD
 FALMOUTH, ME 04105

Telephone: 207-777-9822

Customer
 Perrron

Factory will Ship To
RICH EXTERIOR SOLUTIONS
 123 GRAY ROAD
 FALMOUTH, ME 04105
 207-777-9822

Order # 107,267
 Date 7/26/2018
 Ord Type
 PO #

Comment
 Products Manufactured by Stergis Windows and Doors Attleboro, MA 02703

Line	Mdl	Qty	Description	Color	Width	Height	List	Unit Cost	Net
1	7030	1	Belmont CA, Replace.	White	TTT 30	56	223.34	223.34	223.34
			EnerG Low E Tempered 366 DS/Argon				59.36	59.36	59.36
			2" MR SDL Grids				59.36	59.36	59.36
			How Many Horiz=1						
			How Many Vert=0						
			Hinge Right OSLI						
			Head Expander and Sill angle						
			Full Screen Aluminum						
			Egress Hardware SDL to look like DH						
Line Item Total								342.06	342.06
2	7030	1	Belmont CA, Replace.	White	TTT 32	42	176.49	176.49	176.49
			EnerG Low E Tempered 366 DS/Argon				59.36	59.36	59.36
			2" MR SDL Grids				59.36	59.36	59.36
			How Many Horiz=1						
			How Many Vert=0						
			Hinge Right OSLI						
			Head Expander and Sill angle						
			Full Screen Aluminum						
			Egress Hardware SDL to look like DH						
Line Item Total								295.21	295.21

Order Totals
 Total 637.27
 Sales Tax 0.00
 Grand Total 637.27



Reviewed for Code Compliance
Permitting and Inspections Department
Approved with Conditions

12/28/2018

The
BELMONT



ALLIANCETM
WINDOW SYSTEMS

More Than A Window.



Appealing Views



Ideal Complement

New Windows: Improving Your Lifestyle

The Belmont series from Alliance offers the features and benefits usually found only on the most expensive windows...at an exceptional value. Created with meticulous engineering and efficient manufacturing technology, the Belmont makes replacing those old drafty windows an easy choice.

Remodeling your home? Your options are open with the Belmont series. Select from double or single hung, twin or single vent slider, picture windows or casements. No matter what your home's styling and décor, Alliance Window System's Belmont has a style that will harmonize beautifully.



With Belmont, you receive beauty and brains. Your windows will be thermally efficient, and easy to clean and operate. Designed with a balance system that never needs adjustment, our windows are maintenance free. And, they are backed by one of the industry's strongest warranties, our exclusive Assurance Plus™ warranty.



Double-Hung Features


Non-corrosive hardware includes a lifetime of trouble-free performance, no matter what the environment

- (1) Cam Lock and action draws sash closer together for positive lock
- (2) Interlocking Meeting Rail: Integral interlock provides additional security


ANATOMY OF EFFICIENCY

Energy efficient Belmont windows provide an effective barrier to any weather condition.

- (1) Dual hollows at lift rail add strength and insulation
- (2) Heavy Walled PVC framing acts as a natural insulator.
- (3) Dead Air spaces within the frame and sash profiles further resist energy flow.



- (4) Closed cell compression seal at sloped sill resists air and water penetration
- (5) Fin seal weather stripping at sill further reduces air infiltration.
- (6) 3/4" Insulating glass provides optimal energy efficiency.
- (7) "Warm edge" low conductance spacer resists energy flow through the edge of glass
- (8) Water management grooves channel moisture away from insulated glass sealant.



Reviewed for Code Compliance
Permitting and Inspections Department
Approved with Conditions

12/28/2018

for your home

Style That Fits -

Slider Features

- Two sets of double-wheeled brass rollers transfer weight of glass directly to frame reducing stress on sash members
- Rollers glide on integral track system allowing for effortless finger tip operation
- Both sashes easily lift out for easy cleaning
- Independent weep chambers on frame assure effective water run-off




You'll love our windows for all of the things they bring into your home - and for all the things they keep out.

Casement Features


- Sash opens completely so windows can be cleaned easily from inside your home
- All components are corrosion resistant, providing years of trouble-free performance
- Multi-Point Locking System locks sash at multiple points, for utmost security
- Three layers of weather stripping assure effective barrier to air and water penetration
- Top rated hardware system allows even the largest casements to be effortlessly and smoothly operated

CASEMENT PROFILE

- (1) Multi-Point Lock
- (2) Heavy Wall Reinforced Construction: Allows for slim line look while insuring maximum strength and durability
- (3) Low Profile Curved Lock: Lies flat out of the way of window treatments

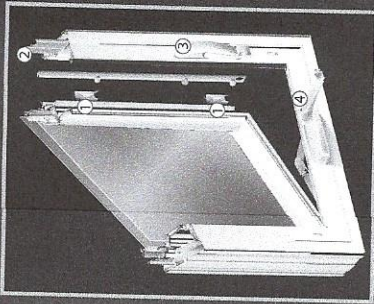

- (4) Low Torque Operator: Crank requires 33% less operating force. Fold down handle available.

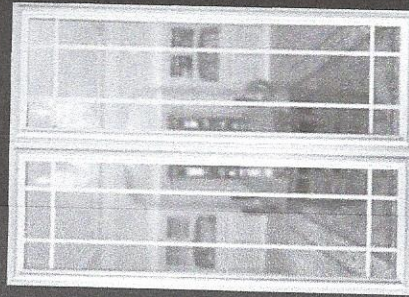

- Unique profile sash
- Narrow frame allows maximum exposed glass area

Reviewed for Code Compliance
Permitting and Inspections Department
Approved with Conditions

12/28/2018



into your home

Single Hung



Single Slider



Belmont single hung and single slide styles offers a high quality energy efficient economical alternative.


Product	U Factor	SHGC Northern/Southern
Belmont Single Hung - Innovative™ Glass Package	0.31	0.33 / 0.31
Belmont Double Hung - Innovative™ Glass Package	0.32	0.30 / 0.28
Belmont Casement - Innovative™ Glass Package	0.29	0.31 / 0.29
Belmont Horizontal Slider - Innovative™ Glass Package	0.32	0.30 / 0.28
Belmont Single Slider - Innovative™ Glass Package	0.31	0.31 / 0.29

For overall structural rating visit our website at www.alliancewindows.com



Look for the ENERGY STAR label on qualified products.


DURASEAL™
ABSOLUTE PERFORMANCE

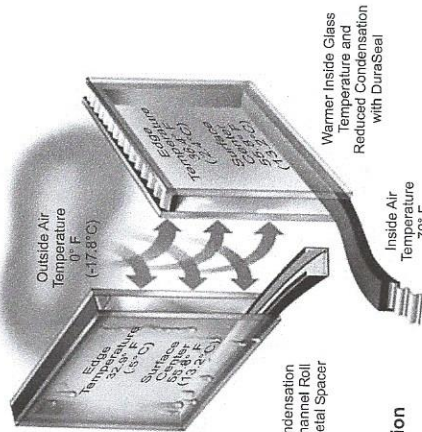

The chart below states solutions with other window brands. By choosing Belmont, you benefit from the optimum solution for new windows in your home.

Window Features	Poor Solution	Average Solution	The Belmont Solution
Interlocking sash	No weather stripping or interlock at meeting rail	Weather stripping at meeting rail, no interlock	Weather stripped interlocking sashes
Glass Package	Single glazed, possibly with storm windows	1 1/2" Clear Insulating Glass, inefficient metal spacer	3/4" Innovative LOWE warm edge non-conductive spacer
Locks/Keepers	Single "sweep arm", lock keeper is part of frame	Pop-riveted "sweep arm" rail	Screwed in "Cam-Action" lock, keeper screwed to rail
Frame/Sash Material	Screwed together wood or aluminum	Screwed together vinyl or clad wood	Fusion-Welded Vinyl for maximum strength and integrity
Vent Latch	None	Single "pry out"	Double "toggle out" (has passed AAMA Forced Entry Resistance Test)
Warranty	None or limited	20 years, but for parts only	Lifetime, with initial coverage for labor
Glass Spacer	None	Heat conductive metal	Low-Conductive Butyl

ENGINEERING AND DESIGN



The craft of window design: uniting experience with technology.




Window cleaning is a breeze, with upper and lower sashes that tilt in easily.

ACCESSORIES

Select from many popular options to further enhance the appearance of your windows. Choices include colonial or brass grids that fit securely within the insulating glass space, special designer glass, and obscure glass. Accessory offerings vary from one Alliance member to the next based on geographical and regional demands. Please check with your regional Alliance manufacturer for details.

AVAILABLE
EXTERIOR VINYL WINDOW COLORS



WHITE

Reviews for Code Compliance
Permitting and Inspections Department
Approved with Conditions


12/28/2018





Reviewed for Code Compliance
Permitting and Inspections Department
Approved with Conditions

12/28/2018

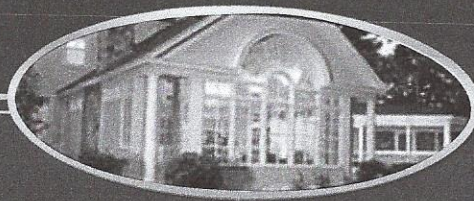

Lifetime Warranty

Alliance is not just our name. It also accurately describes our approach to doing business, and it's why we can provide such an exceptional warranty on every window we offer for your consideration. A proud, independent regional fabricator of excellent experience and reputation meticulously crafts each of our windows. By linking these carefully selected and exceptional fabricators into a national network, or alliance, we are able to be so confident of the quality that is designed and built into our windows; we can back our entire product line with an unsurpassed warranty.

Of course, other window companies may also say they offer a warranty, but we urge you to carefully read their fine print. They may, for example, guarantee the vinyl extrusion, but what about all the moving parts or the insulated glass? The Alliance Assurance Plus® Limited Lifetime Warranty covers it all – for life! Even more remarkable, if a factory defect needs repair within the first five years, we will even provide the labor required.

Many windows leave you wide open to unpleasant surprises. Select a window from Alliance Window Systems and you'll know it's backed by a warranty second to none.



More Than A Window.

www.alliancewindows.com

