

PERMIT ISSUED

City of Portland, Maine - Building or Use Permit Application
389 Congress Street, 04101 Tel: (207) 874-8703, Fax: (207) 874-8716

Permit No: 01-0249 Issue Date: APR 10 2001
City: 427 D022001

Location of Construction: 41 Arcadia St	Owner Name: Sebago Land Developers Inc	Owner Address: 472 Roosevelt Hwy City of Portland ME	Phone: 207 854 4580
Business Name: n/a	Contractor Name: Steven Lawson	Contractor Address: 273 E. Bridge St Westbrook	Phone: 207 854 4580
Lessee/Buyer's Name: n/a	Phone: n/a	Permit Type: Alterations - Dwellings - Two unit only	Zone: R-5

Past Use: Multi-Family Two Family	Proposed Use: Multi-Family Two Family	Permit Fee: \$ 0.00	Cost of Work: \$12,000.00	Area 2
Proposed Project Description: Rebuild exterior deck and Bulkhead.		FIRE DEPT: <input type="checkbox"/> Approved <input type="checkbox"/> Denied	INSPECTION: Use Group: R-2 Type: 503	

Signature: *[Signature]*
Signature: *[Signature]*
Action: Approved Approved w/Conditions Denied
Date: _____

Permit Taken By: cjh Date Applied For: 03/26/2001

- This permit application does not preclude the Applicant(s) from meeting applicable State and Federal Rules.
- Building permits do not include plumbing, septic or electrical work.
- Building permits are void if work is not started within six (6) months of the date of issuance. False information may invalidate a building permit and stop all work.

Zoning Approval

Special Zone or Reviews	Zoning Appeal	Historic Preservation
<input type="checkbox"/> Shoreland <input type="checkbox"/> Wetland <input type="checkbox"/> Flood Zone <input type="checkbox"/> Subdivision <input type="checkbox"/> Site Plan <input type="checkbox"/> Major <input type="checkbox"/> Minor <input type="checkbox"/> MM <input type="checkbox"/> All Per Revised Date: 4/9/01	<input type="checkbox"/> Variance <input type="checkbox"/> Miscellaneous <input type="checkbox"/> Conditional Use <input type="checkbox"/> Interpretation <input type="checkbox"/> Approved <input type="checkbox"/> Denied	<input checked="" type="checkbox"/> Not in District or Landmark <input type="checkbox"/> Does Not Require Review <input type="checkbox"/> Requires Review <input type="checkbox"/> Approved <input type="checkbox"/> Approved w/Conditions <input type="checkbox"/> Denied Date: <i>[Signature]</i>

PERMIT ISSUED WITH REQUIREMENTS

CERTIFICATION

I hereby certify that I am the owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his authorized agent and I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in the application is issued, I certify that the code official's authorized representative shall have the authority to enter all areas covered by such permit at any reasonable hour to enforce the provision of the code(s) applicable to such permit.

SIGNATURE OF APPLICANT _____ ADDRESS _____ DATE _____ PHONE _____

RESPONSIBLE PERSON IN CHARGE OF WORK, TITLE _____ DATE _____ PHONE _____

Call Contractor when Ready.

THIS IS NOT A PERMIT/CONSTRUCTION CANNOT COMMENCE UNTIL THE PERMIT IS ISSUED

Area 2

**Minor/Minor Site Review for New Detached Single Family Dwelling,
All Purpose Building Permit Application**

In the interest of processing your application in the quickest possible manner, please complete the information below for a Building or Use Permit.

NOTEIf you or the property owner owes real estate or personal property taxes or user charges on any property within the City, payment arrangements must be made before permits of any kind are accepted.**

Location/Address of Construction: 41 PRECORN ST PORT	
Total Square Footage of Proposed Structure: N/A	Square Footage of Lot
Tax Assessor's Chart, Block & Lot Number	Owner: WAYNE BERZINS
Chart# 427 Block# D Lot# 22	Telephone#: 780-0958

Lessee/Buyer's Name (If Applicable)	Owner's/Purchaser/Lessee Address:	Cost Of Work: \$12,000	Fee: \$96.00
-------------------------------------	-----------------------------------	-------------------------------	---------------------

Current use: **APARTMENTS** Proposed **SAME**

Project description: **REPAIR INTERIOR REBUILD EXTERIOR DECKS & RAKEHEAD**

Contractor's Name, Address & Telephone
*** 854-4580** **STEVEN LAUDSON**
call when ready **278 E. BRIDGE ST**
INTERBORO MA 04992 Rec'd By: **CH** **3/26**

A "minor/minor" site plan review is required for New Single Family Homes Only. The Site/Plot plan must be prepared and sealed by a registered land surveyor. The following must be submitted:

- 4 copies of the site/plot plan
- 1 copy of the building/construction plan on 32" x 48"
- 1 copy of the site plan/plot plan and construction/building plan on paper no larger than 11" x 17"

On all commercial/Minor & Major projects must submit the following:

- 1 copy of the site/plot plan
- 2 copy of the building/construction plan on 32" x 48"
- 1 copy of the site/plot and construction /building plan on paper no larger than 11" X 17"

Please note that single family additions and alterations may be hand drawn on regular paper and only ONE copy of the below details will still need to be submitted.

**THIS IS NOT A PERMIT/CONSTRUCTION CANNOT COMMENCE UNTIL THE
PERMIT IS ISSUED**

A PLOT PLAN INCLUDES THE FOLLOWING:

- The shape and dimension of the lot, all existing buildings (if any), the proposed structure and the distance from the actual property lines. Structures include decks porches, a bow windows cantilever sections and roof overhangs, as well as, sheds, pools, garages and any other accessory structures.
- Scale and North arrow; Zoning District & Setbacks
- First Floor sill elevation (based on mean sea level datum);
- Location and dimensions of parking areas and driveways;
- Location and size of both existing utilities in the street and the proposed utilities serving the building;
- Location of areas on the site that will be used to dispose of surface water.
- Existing and proposed grade contours

A COMPLETE SET OF CONSTRUCTION DRAWINGS INCLUDES THE FOLLOWING:

- Cross Sections w/Framing details (including porches, decks w/ railings, and accessory structures)
- Floor Plans & Elevations
- Window and door schedules
- Foundation plans with required drainage and damp proofing
- Electrical and plumbing layout. Mechanical drawings for any specialized equipment such as furnaces, chimneys, gas equipment, HVAC equipment (air handling) or other types of work that may require special review must be included.

**SEPARATE PERMITS ARE REQUIRED FOR INTERNAL & EXTERNAL PLUMBING, HVAC
AND ELECTRICAL INSTALLATIONS**

- All construction must be conducted in compliance with the 1999 B.O.C.A. Building Code as amended by Section 6-Art II.
- All plumbing must be conducted in compliance with the State of Maine Plumbing Code.
- All Electrical Installation must comply with the 1999 National Electrical Code as amended by Section 6-Art III.
- HVAC (Heating, Ventilation and Air Conditioning) installation must comply with the 1993 BOCA Mechanical Code.

Certification

I hereby certify that I am the Owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his/her authorized agent. I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in this application is issued, I certify that the Code Official's authorized representative shall have the authority to enter all areas covered by this permit at any reasonable hour to enforce the provisions of the codes applicable to this permit.

Signature of applicant: 	Date: 8/26/01
--	----------------------

Minor/Minor Site Review Fee: \$300.00/Building Permit Fee: \$30.00 for the 1st \$1000.cost plus \$6.00 per \$1,000.00
construction cost thereafter.

**ONE SET OF SUBMISSIONS INCLUDING CONSTRUCTION AND SITE
PLAN DRAWINGS MUST BE SUBMITTED ON PAPER NO LARGER
THAN 11" x 17" BEFORE ANY BUILDING PERMIT WILL BE ISSUED**

LAND USE - ZONING REPORT

ADDRESS: 41 Arcadia St DATE: 3/29/01.

REASON FOR PERMIT: rebuild exterior Decks; Bulk head - repair work

BUILDING OWNER: Wayne Berzins C.B.I.: ~~427-D~~ 427-D-22

PERMIT APPLICANT: Steven Lawson (contractor)

APPROVED: with conditions; #1, #7, #10

CONDITION(S) OF APPROVAL ^{revised plans shown enclosed} plans 4/9/01

- 1. This permit is being approved on the basis of plans submitted. Any deviations shall require a separate approval before starting that work.
- 2. During its existence, all aspects of the Home Occupations criteria, Section 14-410, shall be maintained.
- 3. All the conditions placed on the original, previously approved, permit issued on _____ are still in effect for this amendment, and/or revised permit.
- 4. The footprint of the existing _____ shall not be increased during maintenance reconstruction.
- 5. Your present structure is legally nonconforming as to setbacks. If you are to demolish this structure on your own volition, you will only have one (1) year to replace it in the same footprint (no expansions), with the same height, and the same use. Any changes to any of the above shall require that this structure meet the current zoning standards.
- 6. This property shall remain a single family dwelling. Any change of use shall require a separate permit application for review and approval.
- 7. Our records indicate that this property has a legal use of two (2) units. Any change in this approved use shall require a separate permit application for review and approval.
- 8. Separate permits shall be required for any new signage.
- 9. Separate permits shall be required for future decks, sheds, pool(s), and/or garage.
- 10. This is not an approval for an additional dwelling unit. You shall not add any additional kitchen equipment including, but not limited to items such as stoves, microwaves, refrigerators, or kitchen sinks, etc. without special approvals.
- 11. All of the attached Floodplain forms shall be appropriately filled out, signed, and returned prior to the issuance of any certificates of occupancy.
- 12. Other requirements of condition: SHALL meet all building code construction requirements

Marge Schmuckel Marge Schmuckel, Zoning Administrator

BUILDING PERMIT REPORT

DATE: 28 March 2001 ADDRESS: 41 Arcadia Street CBI: 427-D-022

REASON FOR PERMIT: Re-Construct Exterior Bulkhead, Repair Interior
BUILDING OWNER: Sebago Land Developers Inc.

PERMIT APPLICANT: _____ CONTRACTOR Steven Lawson

USE GROUP: R-2 CONSTRUCTION TYPE: 5B CONSTRUCTION COST: \$12,000 PERMIT FEES: \$6.00


The City's Adopted Building Code (The BOCA National Building Code/1999 with City Amendments)
The City's Adopted Mechanical Code (The BOCA National Mechanical Code/1993)

CONDITION(S) OF APPROVAL

This permit is being issued with the understanding that the following conditions shall be met: *1 *2 *4 *6
*11 *13 *30 *32 *33 *34 *35 *36 *38

1. This permit does not excuse the applicant from meeting applicable State and Federal rules and laws.
2. Before concrete for foundation is placed, approvals from the Development Review Coordinator and Inspection Services must be obtained. (A 24 hour notice is required prior to inspection) "ALL LOT LINES SHALL BE CLEARLY MARKED BEFORE CALLING."
3. Foundation drain shall be placed around the perimeter of a foundation that consists of gravel or crushed stone containing not more than 10 percent material that passes through a No. 4 sieve. The drain shall extend a minimum of 12 inches beyond the outside edge of the footing. The thickness shall be such that the bottom of the drain is not higher than the bottom of the base under the floor, and that the top of the drain is not less than 6 inches above the top of the footing. The top of the drain shall be covered with an approved filter membrane material. Where a drain tile or perforated pipe is used, the invert of the pipe or tile shall not be higher than the floor elevation. The top of joints or top of perforations shall be protected with an approved filter membrane material. The pipe or tile shall be placed on not less than 2" of gravel or crushed stone, and shall be covered with not less than 6" of the same material. Section 1813.52
4. Foundations anchors shall be a minimum of 1/2" in diameter, 7" into the foundation wall, minimum of 12" from corners of foundation and a maximum 6' O.C. between bolts. Section 2305.17 Anchors shall be used between Piers and Footings, Fastenings between Piers
5. Waterproofing and dampproofing shall be done in accordance with Section 1813.0 of the building code.
6. Precast concrete must be taken to protect concrete and masonry. Concrete Sections 1908.9-19.8, 10/ Masonry Sections 2111.3-2111.4.
7. It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify that the proper setbacks are maintained.
8. Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of 1/2 inch gypsum board or the equivalent applied to the garage side. (Chapter 4, Section 407.0 of the BOCA/1999)
9. All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National Mechanical Code/1993). Chapter 12 & NFPA 211
10. Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the City's Building Code.
11. Guardrails & Handrails: A guard-rail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42". In occupancies in Use Group A, B, H-4, I-1, I-2, M, R, public garages and open parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would provide a ladder effect. Handrails shall be a minimum of 34" but not more than 38". Exception: Handrails that form part of a guard shall have a height not less than 36 inches (914 mm) and not more than 42 inches (1067 mm). Handrail grip size shall have a circular cross section with an outside diameter of at least 1 1/2" and not greater than 2". (Sections 1021 & 1022.0). Handrails shall be on both sides of stairway. (Section 1014.7)
12. Headroom in habitable space is a minimum of 7'6". (Section 1204.0)
13. Stair construction in Use Group R-3 & R-4 is a minimum of 10" tread and 7 1/2" maximum rise. All other Use Group minimum 11" tread, 7" maximum rise. (Section 1014.0)
14. The minimum headroom in all parts of a stairway shall not be less than 80 inches. (6'8") 1014.4
15. The Minimum required width of a corridor shall be determined by the most restrictive of the criteria under section 1011.3 but not less than 36".
16. Every sleeping room below the fourth story in buildings of Use Groups R and I-1 shall have at least one operable window or exterior door approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate tools. Where windows are provided as means of egress or rescue they shall have a sill height not more than 44 inches (1118mm) above the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches (610mm). The minimum net clear opening width dimension shall be 20 inches (508mm), and a minimum net clear opening of 5.7 sq. ft. (Section 1010.4)
17. Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it exits directly from the apartment to the building exterior with no communications to other apartment units. (Section 1010.1)
18. All vertical openings shall be enclosed with construction having a fire rating of at least one (1) hour, including fire doors with self closure's. (Over 3 stories in height requirements for fire rating is two (2) hours. (Section 710.0)
19. The boiler shall be protected by enclosing with (1) hour fire rated construction including fire doors and ceiling, or by providing automatic extinguishment. (Table 302.1.1)

20. All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City's Building Code Chapter 9, Section 920.3.2 (BOCA National Building Code/1999), and NFPA 101 Chapter 18 & 19. (Smoke detectors shall be installed and maintained at the following locations):
 - In the immediate vicinity of bedrooms
 - In all bedrooms
 - In each story within a dwelling unit, including basements
21. A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved type. (Section 921.0)
22. The Fire Alarm System shall be installed and maintained to NFPA #72 Standard.
23. The Sprinkler System shall be installed and maintained to NFPA #13 Standard.
24. All exit signs, lights and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023.0 & 1024.0 of the City's Building Code. (The BOCA National Building Code/1999)
25. Section 25 - 135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year"
26. The builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a certification from a design professional that the plans commencing construction of the facility, the builder shall submit the certification the Division of Inspection Services.
27. Ventilation and access shall meet the requirements of Chapter 12 Sections 1210.0 and 1211.0 of the City's Building Code. (Crawl spaces & attics).
28. All electrical, plumbing and HVAC permits must be obtained by Master Licensed holders of their trade. No closing in of walls until all electrical (min. 72 hours notice) and plumbing inspections have been done.
29. All requirements must be met before a final Certificate of Occupancy is issued.
- *30. All building elements shall meet the fastening schedule as per Table 2305.2 of the City's Building Code (The BOCA National Building Code/1996).
31. Ventilation of spaces within a building shall be done in accordance with the City's Mechanical code (The BOCA National Mechanical Code/1993). (Chapter M-16)
32. Please read and implement the attached Land Use Zoning report requirements. *See Attached*
- *33. Boring, cutting and notching shall be done in accordance with Sections 2305.3, 2305.3.1, 2305.4.4 and 2305.5.1 of the City's Building Code.
- *34. Bridging shall comply with Section 2305.16.
- *35. Glass and glazing shall meet the requirements of Chapter 24 of the building code. (Safety Glazing Section 2406.0)
- *36. All flashing shall comply with Section 1406.3.10.
- *37. All signage shall be done in accordance with Section 3102.0 signs of the City's Building Code. (The BOCA National Building Code/1999).
- *38. *Read the Conditions of This Permit Carefully*


 Lt. McDonnell, PFD
 Marge Schmuckel, Zoning Administrator
 Michael Nugent, Inspection Service Manager

PSH 10/1/00

**This permit is herewith issued, on the basis of plans submitted and conditions placed on these plans, any deviations shall require a separate approval

***THIS PERMIT HAS BEEN ISSUED WITH THE UNDERSTANDING THAT ALL THE CONDITIONS OF THE APPROVAL SHALL BE COMPLETED. THEREFORE, BEFORE THE WORK IS COMPLETED A REVISED PLAN OR STATEMENT FROM THE PERMIT HOLDER SHALL BE SUBMITTED TO THIS OFFICE SHOWING OR EXPLAINING THAT THE CONDITIONS HAVE BEEN MET. IF THIS REQUIREMENT IS NOT RECEIVED YOUR CERTIFICATE OF OCCUPANCY SHALL BE WITHHELD. (You Shall Call for Inspections)

**** ALL PLANS THAT REQUIRE A PROFESSIONAL DESIGNER'S SEAL, (AS PER SECTION 114.0 OF THE BUILDING CODE) SHALL ALSO BE PRESENTED TO THIS DIVISION ON AUTO CAD LT. 2000, DXF FORMAT OR EQUIVALENT.

***** CERTIFICATE OF OCCUPANCY FEE \$50.00

RECORD OF BUILDINGS


GRADE DENOTES QUALITY OF CONSTRUCTION: A-EXCELLENT; B-GOOD; C-AVERAGE; D-CHEAP; E-VERY CHEAP

YEAR 19

YEAR 19

CONSTRUCTION		COMPUTATIONS	
FOUNDATION	CONCRETE		
	CONCRETE BLOCK		
	BRICK OR STONE		
	PIERS		
	CELLAR AREA FULL		
	NO. CELLAR		
EXTERIOR WALLS			
	CLAPBOARDS		
	WIDE SIDING		
	DROP SIDING		
	NO SHEATHING		
	WOOD SHINGLES		
	ASBES. SHINGLES		
	STUCCO ON FRAME		
	STUCCO ON TILE		
	BRICK VENEER		
	BRICK ON TILE		
	SOLID BRICK		
	STONE VENEER		
	CONG. OR CIND. BL.		
	TERRA COTTA		
	VITROLITE		
	PLATE GLASS		
	INSULATION		
	WEATHERSTRIP		
ROOFING			
	ASPH. SHINGLES		
	WOOD SHINGLES		
	ASBES. SHINGLES		
	SLATE TILE		
	METAL		
	COMPOSITION		
	ROLL ROOFING		
	INSULATION		
	STOKER		
	OIL BURNER		
	GAS BURNER		
	NO HEATING		
	HOT WAT. OR VAPOR		
	STEAM		
	FORCED AIR FURN.		
	HOT AIR FURNACE		
	PIPELESS FURNACE		
	HEATING		
	FIREPLACE		
	RECREAT. ROOM		
	FINISHED ATTIC		
	APARTMENT		
	STORE		
	THEATRE		
	HOTEL		
	OFFICES		
	WAREHOUSE		
	COMM. GARAGE		
	GAS STATION		
	ECONOMIC CLASS		
	OVER BUILT		
	UNDER BUILT		
	CR. L.S.		
	LD. #		
	MS. #		
	FACTS		
	TOTAL		
	ROOF		
	SINGLE FAMILY		
	TWO FAMILY		
	FLOORS		
	ATTIC		
	FINISH		
	THEATRE		
	FIREPLACE		
	HEATING		
	PLUMBING		
	TILING		
	NO. OF ROOMS		
	BSMT.		
	1ST		
	2ND		
	3RD		
	OCCUPANCY		
	ADDITIONS		
	ELECTRIC		
	LIGHTING		
	TOILET FL. & WCOT.		
	BATH FL. & WCOT.		
	TILING		
	NO PLUMBING		
	LAUNDRY TUBS		
	ELECT. WAT. SYST.		
	AUTO. WAT. HEAT		
	STD. WAT. HEAT		
	KITCHEN SINK		
	LAVATORY		
	WATER CLOSET		
	TOILET ROOM		
	BATHROOM		
	FLOOR CONST.		
	WOOD JOIST		
	STEEL JOIST		
	MILL TYPE		
	REIN. CONCRETE		
	FLOOR FINISH		
	CEMENT		
	EARTH		
	PINE		
	HARDWOOD		
	TERRAZZO		
	TILE		
	ATTIC FLR. & STAIRS		
	INTERIOR FINISH		
	PINE		
	HARDWOOD		
	PLASTER		
	UNFINISHED		
	METAL CLG.		
	RECREAT. ROOM		
	FINISHED ATTIC		
	FIREPLACE		
	HEATING		
	PIPELESS FURNACE		
	HOT AIR FURNACE		
	FORCED AIR FURN.		
	STEAM		
	HOT WAT. OR VAPOR		
	NO HEATING		
	METAL		
	COMPOSITION		
	ROLL ROOFING		
	INSULATION		

YEAR	TAX VAL.	1951	1951 TOTAL BLDGS.	1951	TAX VAL.	1951
CHANGE						
OLD VAL.						
TAX VAL.						
OCCY.						
TYPE						
GR.						
AGE						
REMOD.						
COND.						
REF. VAL.						
P. D.						
PHY. VAL.						
F. D.						
SOUND VAL.						
TAX VAL.						

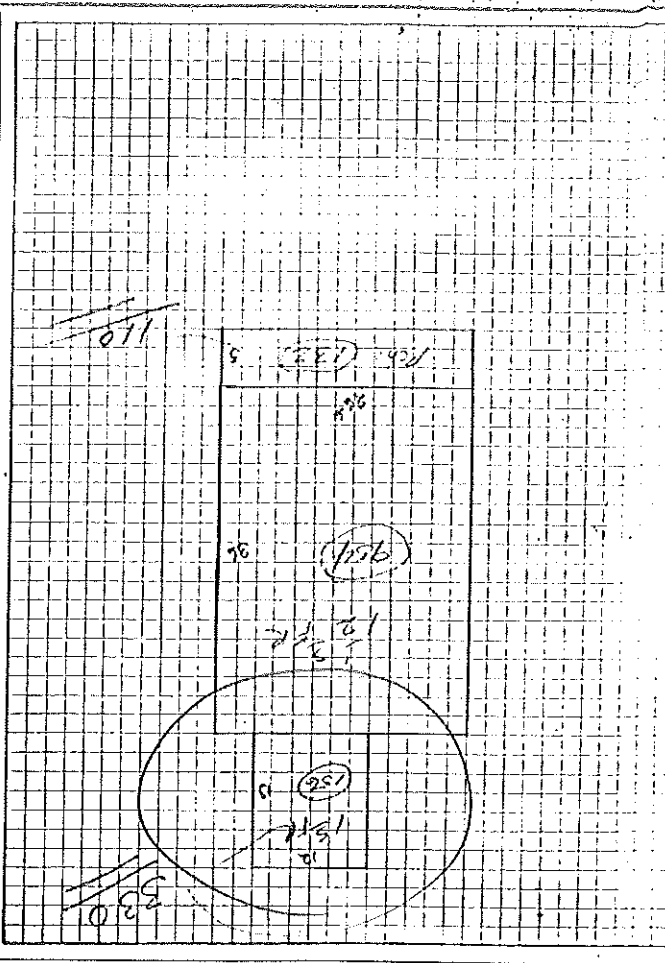

41 Arcadia St

427-D-022


7/24/91

6 x 12

EFB

N
C
A
C
M

12x13-1981

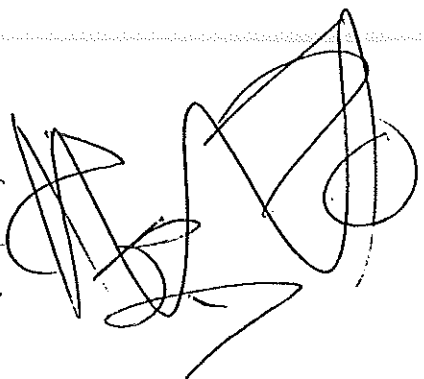

1st story
frame

14-16 W. 5th
St
Chgo

ELECTRICAL PERMIT

City of Portland, Me.



To the Chief Electrical Inspector, Portland Maine:
 The undersigned hereby applies for a permit to make electrical installations
 in accordance with the laws of Maine, the City of Portland Electrical Ordinance,
 National Electrical Code and the following specifications:

Date 2-16-01

Permit # 1238

OBL# 427 D 022

LOCATION: 41 Arcadia St METER MAKE & # _____
 CMP ACCOUNT # _____ OWNER Wayne Brzimis
 TENANT _____ PHONE # 878-8103

	OUTLETS	RECEPTACLES	SWITCHES	SMOKE DETECTOR	TOTAL EACH FEE
FIXTURES	14	Incandescent	Fluorescent	Strips	.20
SERVICES	1	Overhead	Underground	TTL AMPS	<800 15.00
		Overhead	Underground	TTL AMPS	>800 25.00
Temporary Service		Overhead	Underground	TTL AMPS	25.00
METERS	2	(number of)			25.00
MOTORS	2	(number of)			1.00
RESID/COM		Electric units			2.00
HEATING	2	oil/gas units	Interior	Exterior	1.00
		Ranges	Cook Tops	Wall Ovens	5.00
APPLIANCES	2	Insta-Hot	Water heaters	Fans	2.00
		Dryers	Disposals	Dishwasher	2.00
MISC. (number of)		Compactors	Spa	Washing Machine	2.00
		Others (denote)			2.00
	Air Cond/win				3.00
	HVAC		EMS	Pools	10.00
	Signs			Thermostat	5.00
	Alarms/ses				10.00
	Alarms/com				5.00
	Heavy Duty(CRKT)				15.00
	Circus/Carnv				2.00
	Alterations				25.00
	Fire Repairs				5.00
	E Lights				15.00
	E Generators				1.00
PANELS					20.00
TRANSFORMER		Service	Remote	Main	4.00
		0-25 Kva			5.00
	25-200 Kva				8.00
	Over 200 Kva				10.00
INSPECTION:	MINIMUM FEE/COMMERCIAL 45.00			TOTAL AMOUNT DUE	79.40
	Will be ready _____			MINIMUM FEE	35.00
	or will call <input checked="" type="checkbox"/>				

CONTRACTORS NAME David Brzimis MASTER LIC. # 04901
 ADDRESS 10 Royal Gambury Way Westbrook LIMITED LIC. # _____
 TELEPHONE 856-2856
 SIGNATURE OF CONTRACTOR David Brzimis



CITY OF PORTLAND, MAINE
Department of Building Inspection

March 26 20 01

Received from Steve Larson a fee

of Nine Six dollars X 100 Dollars \$ 96.00

for permit to alter build attached deck

at 41 Acadia St Est. Cost \$ 12,000

CASH

Inspector of buildings
Per [Signature]

THIS IS NOT A PERMIT

No work is to be started until PERMIT CARD is actually posted upon the premises. Acceptance of fee is no guarantee that permit will be granted. PRESERVE THIS RECEIPT. In case permit cannot be granted the amount of the fee will be refunded upon return of the receipt less \$5.00 or 10% whichever is greater.

WHITE - Applicant's Copy
YELLOW - Office Copy
PINK - Auditors Copy