

City of Portland, Maine - Building or Use Permit Application 389 Congress Street, 04101, Tel: (207) 874-8703, FAX: 874-8716


Location of Construction: 158 New Island Ave Ext Peaks Isl		Owner: Wendell & Sue Lange		Phone:	Permit 050489
Owner Address:		Leasee/Buyer's Name:		Phone:	Business Name:
Contractor Name: Robert Davis		Address: 45 Island Ave Peaks Island, ME		Phone: 04108 (Apt 2) 766-5531	
Past Use: for summer cottage		Proposed Use: same w/REINFORCED Deck		COST OF WORK: \$ 1,500.00	PERMIT FEE: \$ 30.00
Proposed Project Description: Construct REINFORCED deck as per plans		FIRE DEPT. <input type="checkbox"/> Approved <input type="checkbox"/> Denied		INSPECTION: Use Group <u>R3</u> Type <u>SB</u> Signature: <i>[Signature]</i>	
Permit Taken By: <u>Mary Grzesik</u>		Date Applied For: <u>12 May 1995</u>		PEDESTRIAN ACTIVITIES DISTRICT (P.A.D.) Action: <input type="checkbox"/> Approved <input type="checkbox"/> Approved with Conditions <input type="checkbox"/> Denied Signature: _____ Date: _____	
<p>1. This permit application doesn't preclude the applicant(s) from meeting applicable State and Federal rules</p> <p>2. Building permits do not include plumbing or electrical work.</p> <p>3. Building permits are void if work is not started within six (6) months of the date of issuance. False information may invalidate a building permit and stop all work.</p> <p>No debris removal necessary</p>		<p>Zoning Approval: OK 25' (S) 5/17/95</p> <p>Special Zone or Reviews:</p> <p><input type="checkbox"/> Shoreland <input type="checkbox"/> Wetland <input type="checkbox"/> Flood Zone <input type="checkbox"/> Subdivision <input type="checkbox"/> Site Plan major <input type="checkbox"/> minor <input type="checkbox"/> mm <input type="checkbox"/></p> <p>Zoning Appeal</p> <p><input type="checkbox"/> Variance <input type="checkbox"/> Miscellaneous <input type="checkbox"/> Conditional Use <input type="checkbox"/> Interpretation <input type="checkbox"/> Approved <input type="checkbox"/> Denied</p> <p>Historic Preservation</p> <p><input type="checkbox"/> Not in District or Landmark <input type="checkbox"/> Does Not Require Review <input type="checkbox"/> Requires Review</p>		<p>PERMIT ISSUED WITH REQUIREMENTS</p> <p>Action:</p> <p><input type="checkbox"/> Approved <input type="checkbox"/> Approved with Conditions <input type="checkbox"/> Denied</p> <p>Date: <u>5/15/95</u></p> <p><i>[Signature]</i></p> <p>CEO DISTRICT 6 <i>A. Rowle</i></p>	
SIGNATURE OF APPLICANT <u>Robert Davis</u>		ADDRESS:		DATE: <u>12 May 1995</u>	
RESPONSIBLE PERSON IN CHARGE OF WORK, TITLE		PHONE:		PHONE:	

White-Permit Desk Green-Assessor's Canary-D.P.W. Pink-Public File Ivory Card-Inspector

COMMENTS

10/19/46 completed

A. Law



Inspection Record

	Type	Date
Foundation:	OK Other	6/7/46
Framing:		
Plumbing:		
Final:		
Other:		

BUILDING PERMIT REPORT

DATE: 17/may/95 ADDRESS: 158 New Island Ave, P.I.

REASON FOR PERMIT: To construct deck

BUILDING OWNER: Wendell & Sue Lang

CONTRACTOR: Robert Davis APPROVED: [Signature]

PERMIT APPLICANT: _____ REJECTED: _____


CONDITION OF APPROVAL OR DENIAL

1. Before concrete for foundation is placed, approvals from ~~Public Works~~ and Inspection services must be obtained. (A 24 hour notice is required prior to inspection)
2. Precaution must be taken to protect concrete from freezing.
3. It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify that the proper setbacks are maintained.
4. All vertical openings shall be enclosed with construction having a fire rating of at least one(1) hour, including fire doors with selfclosers.
5. Each apartment shall have access to two(2) separate, remote and approved means of egress. A single exit is acceptable when it exits directly from the apartment to the building exterior with no communications to other apartment units.
6. The boiler shall be protected by enclosing with one(1) hour fire-rated construction including fire doors and ceiling, or by providing automatic extinguishment. Sprinkler piping serving not more than six sprinklers may be connected to a domestic water supply having a capacity sufficient to provide 0.15 gallons per minute, per square foot of floor throughout the entire area. An INDICATING shut-off valve shall be installed in an accessible location between the sprinkler and the connection to the domestic water supply. Minimum pipe size shall be 3/4 inch copper or 1 inch steel. Maximum coverage area of a residential sprinkler is 144 sq. feet per sprinkler.
7. Every sleeping room below the fourth story in buildings of Use Groups R and I-1 shall have at least one operable window or exterior door approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate tools. Where windows are provided as means of egress or rescue, they shall have a sill height not more than 44 inches (1118mm) above the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches (610mm). The minimum net clear opening width dimension shall be 20 inches (508 mm), and a minimum net clear opening of 5.7 sq. feet.
8. A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved type.
9. All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the city's building code Chapter 9, section 19, 919.3.2(BOCA National Building Code/1993), and NFPA 101 Chapter 18 & 19. (Smoke detectors shall be installed and maintained at the following locations):


1. In the immediate vicinity of bedrooms
2. In all bedrooms
3. In each story within a dwelling unit, including basements

In addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and I-1 shall receive power from a battery when the AC primary power source is interrupted.

10. Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of 1/2 inch gypsum board or the equivalent applied to the garage side. (Chapter 4 section 407.0 of the BOCA/1993)
- A 11. Guardrail & Handrails-A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42", except Use Group R which is 36". In occupancies in Use Group A, B, R-4, I-1, I-2 M and R and public garages and open parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would provide a ladder effect.
12. All exit signs, lights, and means of egress lighting shall be done in accordance with Chapter 10, section & subsections 1023. & 1024. of the City's building code. (The BOCA National Building Code/1993)
- K 13. Stair construction in Use Group R-3 & R-4 is a minimum of 9" tread and 8-1/4" maximum rise. All other Use Group minimum 11" tread, 7" maximum rise.
14. Headroom in habitable space is a minimum of 7'6".
15. The minimum headroom in all parts of a stairway shall not be less than 80 inches.
16. All construction and demolition debris must be disposed at the City's authorized reclamation site. The fee rate is attached. Proof of such disposal must be furnished to the office of Inspection Services before final Certificate of Occupancy is issued or demolition permit is granted.
17. Section 25-135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year".
18. The builder of a facility to which section 4594-C of the Maine State Human Rights Act, Title 5 MRSA refers, shall obtain a certification from a design professional that the plans of the facility meet the standards of construction required by this section. Prior to commencing construction of the facility, the builder shall submit the certification to the Division of Inspection Services.
19. This permit does not excuse the applicant from obtaining a license which may be needed from the city clerk's office.


 Samuel Barros, Chief of Inspection Services

/el 3/16/95.

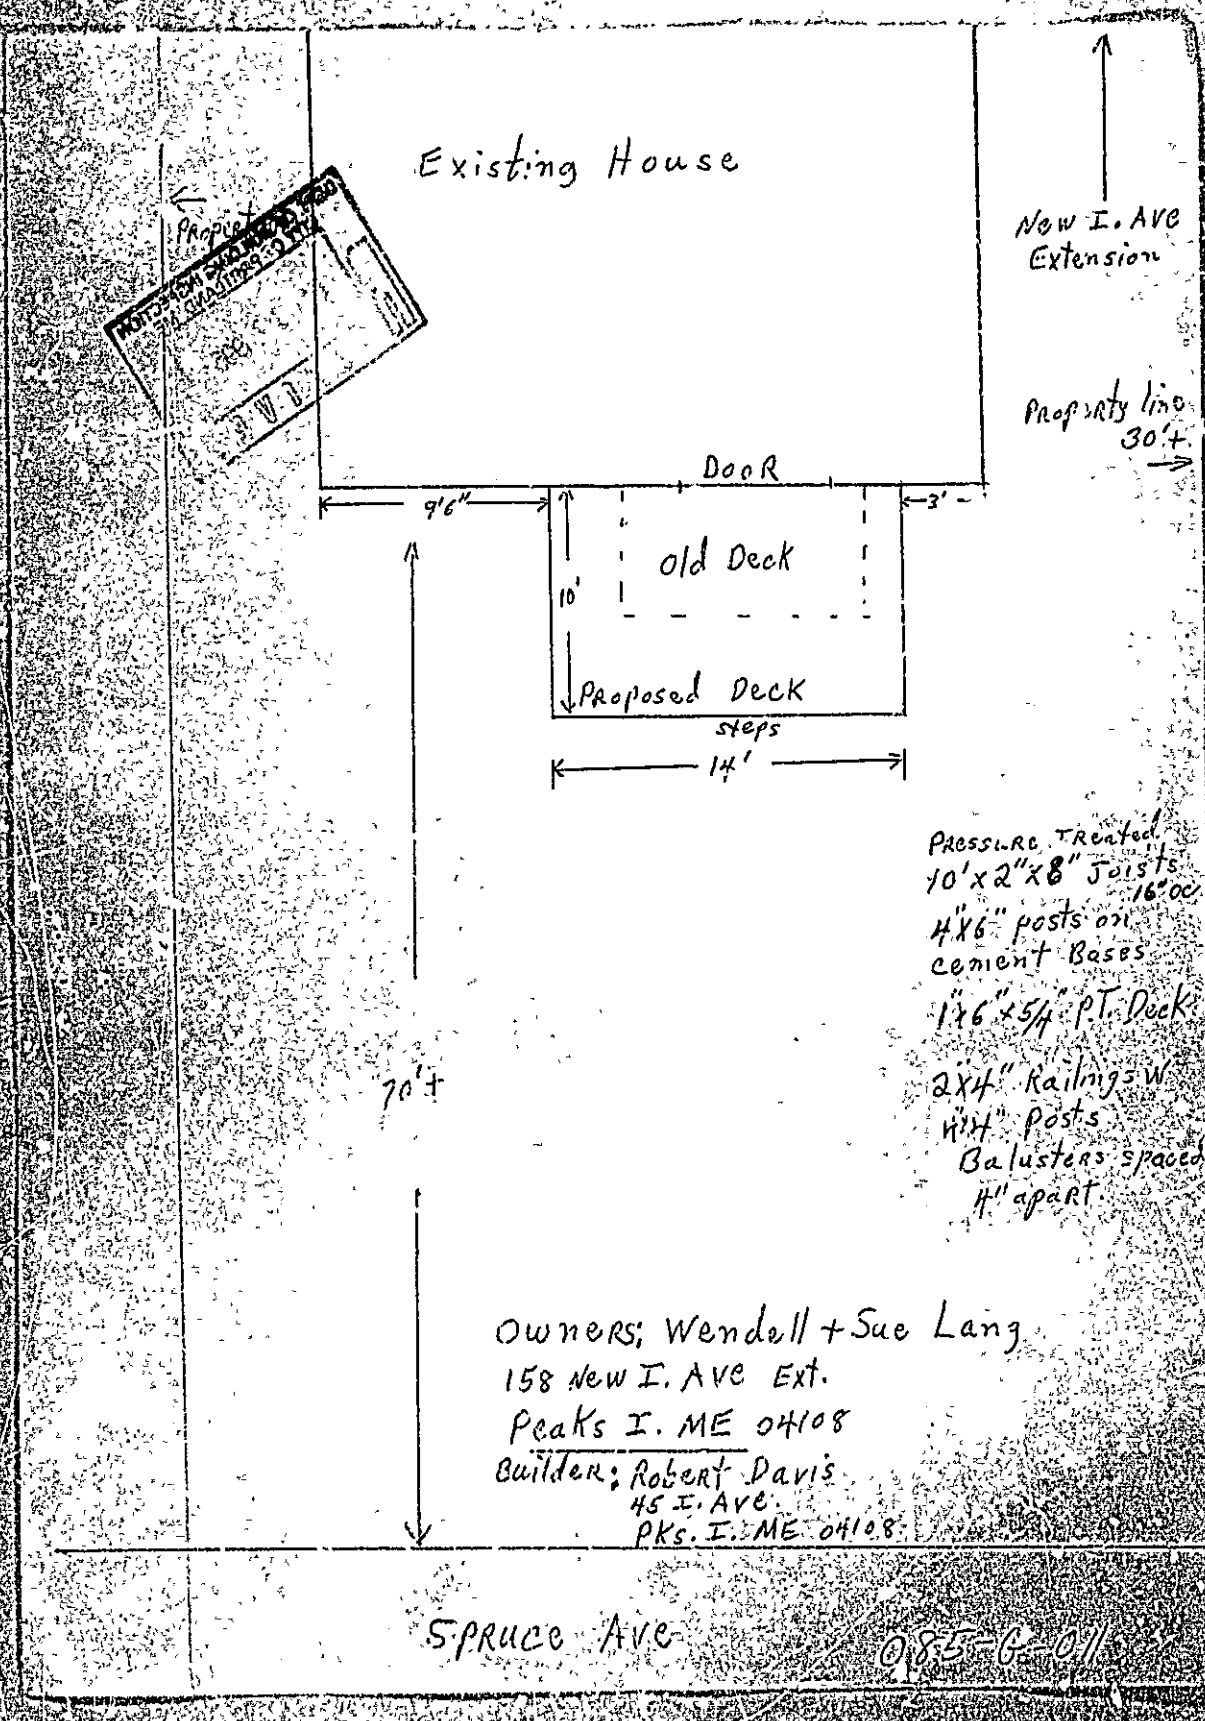

Existing House

New I. Ave Extension

Property line 30'±

Door

old Deck

Proposed Deck steps

PRESSURE TREATED
 10'x2"x8" Joists
 4"x6" posts on cement Bases
 1"x6"x5/4" P.T. Deck
 2"x4" Railings w/ 4" Posts
 Balusters spaced 4" apart

Owners: Wendell + Sue Lang
 158 New I. Ave Ext.
 Peaks I. ME 04108
 Builder: Robert Davis
 45 I. Ave.
 PKs. I. ME 04108

Spruce Ave

085-G-011