

City of Portland, Maine - Building or Use Permit Application 389 Congress Street, 04101, Tel: (207) 874-8703, FAX: 874-87

Location of Construction: Lyndon Ave - Peaks Isl		Owner: Gayle Burton	Phone: 793-4861	Permit No: 96081
Owner Address: HC 81 Box 228 - West Newfield ME 04095		Leasee/Buyer's Name: ME 04095	Phone:	Business Name:
Contractor Name: Bill Bunton - Bunton		Address: HC 81 Box 228 West Newfield ME 04095		Phone:
Past Use: 1-fam & dwlg	Proposed Use: 1-fam w intr/extr renovations	COST OF WORK: \$ 25,000	PERMIT FEE: \$ 145	Permit Issued: AUG 19 1996 CITY OF PORTLAND
Proposed Project Description: interior/exterior renovations		FIRE DEPT. <input type="checkbox"/> Approved <input type="checkbox"/> Denied	INSPECTION: Use Group: Type: Signature: <i>8/19/96</i>	
Permit Taken By: L Chase		Date Applied For: 8/16/96	Zoning Approval: PEDESTRIAN ACTIVITIES DISTRICT (P.U.D.) Action: <input type="checkbox"/> Approved <input type="checkbox"/> Approved with Conditions <input type="checkbox"/> Denied Signature: Date:	

- This permit application doesn't preclude the Applicant(s) from meeting applicable State and Federal rules.
- Building permits do not include plumbing, septic or electrical work.
- Building permits are void if work is not started within six (6) months of the date of issuance. False information may invalidate a building permit and stop all work.

PERMIT ISSUED WITH REQUIREMENTS

CERTIFICATION

I hereby certify that I am the owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his authorized agent and I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in the application issued, I certify that the code official's authorized representative shall have the authority to enter all areas covered by such permit at any reasonable hour to enforce the provisions of the code(s) applicable to such permit

SIGNATURE OF APPLICANT: *William S. Burton* ADDRESS: *8/16/96* DATE: PHONE:

RESPONSIBLE PERSON IN CHARGE OF WORK, TITLE: PHONE:

White-Permit Desk Green-Assessor's Canary-D.P.W. Pink-Public File Ivory Card-Inspector

Zone: *DL-1* CBL: *29-A-5*

Shoreland Not in

Wetland

Flood Zone *of 3*

Subdivision

Site Plan major minor minor

Zoning Appeal

Variance

Miscellaneous

Conditional Use

Interpretation

Approved

Denied

Historic Preservation

Not in District or Landmark

Does Not Require Review

Requires Review

Action:

Approved

Approved with Conditions

Denied

Date: *8/16/96*

D. Anderson

CEO DISTRICT: *6*

A. Row

City of Portland, Maine - Building or Use Permit Application 389 Congress Street, 04101, Tel: (207) 874-8703, FAX: 874-8716

Location of Construction: Lynden Ave - Peaks Isl		Owner: Gayle Bunton	Phone: 793-4861	Permit No: 960814
Owner Address: HC 81 Box 228 - West Newfield		Leasee/Buyer's Name: ME 04095	Phone:	Business Name:
Contractor Name: Bill Bunton - Bunton		Address: HC 81 Box 228 West Newfield ME 04095		<div style="border: 2px solid black; padding: 5px; text-align: center;"> PERMIT ISSUED Permit Issued: AUG 19 1996 CITY OF PORTLAND </div>
Past Use: 1-fam Adwlg		Proposed Use: 1-fam w intr/extr renovations		
Proposed Project Description: Interior/exterior renovations		COST OF WORK: \$ 25,000 FIRE DEPT. <input type="checkbox"/> Approved <input type="checkbox"/> Denied PEDESTRIAN ACTIVITIES DISTRICT (P.U.D.) Action: Approved <input type="checkbox"/> Approved with Conditions: <input type="checkbox"/> Denied <input type="checkbox"/>		PERMIT FEE: \$ 145 INSPECTION: Use Group: Type: Signature: <i>[Signature]</i> 8/16/96
Permit Taken By: L Chaso		Date Applied For: 8/16/96		Zone: CBL 89-A-S Zoning Approval: Special Zone or Reviews: <input type="checkbox"/> Shoreland <i>Not in it</i> <input type="checkbox"/> Wetland <input type="checkbox"/> Flood Zone <input type="checkbox"/> Subdivision <input type="checkbox"/> Site Plan <input type="checkbox"/> maj <input type="checkbox"/> minor <input type="checkbox"/> mm <input type="checkbox"/>

- This permit application doesn't preclude the Applicant(s) from meeting applicable State and Federal rules.
- Building permits do not include plumbing, septic or electrical work.
- Building permits are void if work is not started within six (6) months of the date of issuance. False information may invalidate a building permit and stop all work.

PERMIT ISSUED

CERTIFICATION

I hereby certify that I am the owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his authorized agent and I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in the application issued, I certify that the code official's authorized representative shall have the authority to enter all areas covered by such permit at any reasonable hour to enforce the provisions of the code(s) applicable to such permit

SIGNATURE OF APPLICANT: *[Signature]* ADDRESS: **8/16/96** DATE: **8/16/96** PHONE:

RESPONSIBLE PERSON IN CHARGE OF WORK, TITLE: _____ PHONE: _____

White-Permit Desk Green-Assessor's Canary-D.P.W. Pink-Public File Ivory Card-Inspector

CEO DISTRICT: **6**

COMMENTS

9-17-96 Framing is all complete

Type	Inspection Record	Date
Foundation:	_____	_____
Framing:	_____	_____
Plumbing:	_____	_____
Final:	_____	_____
Other:	_____	_____

BUILDING PERMIT REPORT

DATE: 8/19/96 ADDRESS: Lyndon Ave, Peaks Is 89A-5
REASON FOR PERMIT: to make interior/external renovating
BUILDING OWNER: Gyle Burton
CONTRACTOR: Burton Const. APPROVED: with conditions
PERMIT APPLICANT: Contractor DENIED: # 1, 7, 9, 14, 16

CONDITION OF APPROVAL OR DENIAL

1. Before concrete for foundation is placed, approvals from Public Works and Inspection Services must be obtained. (A 24 hour notice is required prior to inspection)
2. Precaution must be taken to protect concrete from freezing.
3. It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify that the proper setbacks are maintained.
4. All vertical openings shall be enclosed with construction having a fire rating of at least one(1) hour, including fire doors with selfclosers.
5. Each apartment shall have access to two(2) separate, remote and approved means of egress. A single exit is acceptable when it exits directly from the apartment to the building exterior with no communications to other apartment units.
6. The boiler shall be protected by enclosing with one(1) hour fire-rated construction including fire doors and ceiling, or by providing automatic extinguishment. Sprinkler piping serving not more than six sprinklers may be connected to a domestic water supply having a capacity sufficient to provide 0.15 gallons per minute, per square foot of floor throughout the entire area. An INDICATING shut-off valve shall be installed in an accessible location between the sprinkler and the connection to the domestic water supply. Minimum pipe size shall be 3/4 inch copper or 1 inch steel. Maximum coverage area of a residential sprinkler is 144 sq. feet per sprinkler.
7. Every sleeping room below fourth story in buildings of Use Groups R and I-1 shall have at least one operable window or exterior door approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate tools. Where windows are provided as means of egress or rescue, they shall have a sill height not more than 44 inches (1118mm) above the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches (610mm). The minimum net clear opening width dimension shall be 20 inches (508 mm), and a minimum net clear opening of 5.7 sq. feet.
8. A portable fire extinguisher shall be located as per NFPA §10. They shall bear the label of an approved agency and be of an approved type.
9. All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City's building code Chapter 9, section 19, 919.3.2(BOCA National Building Code/1993), and NFPA 101 Chapter 18 & 19. (Smoke detectors shall be installed and maintained at the following locations):

(over)


1. In the immediate vicinity of bedrooms
2. In all bedrooms
3. In each story within a dwelling unit, including basements

In addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and I-1 shall receive power from a battery when the AC primary power source is interrupted.

10. Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of 1/2 inch gypsum board or the equivalent applied to the garage side. (Chapter 4 section 4(7.0 of the BOCA/1993)
11. Guardrail & Handrails-A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42", except Use Group R which is 36". In occupancies in Use Group A, B, H-4, I-1, I-2 M and R and public garages and open parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would provide a ladder effect.
12. All exit signs, lights, and means of egress lighting shall be done in accordance with Chapter 10, section 8 subsections 1023. & 1024. of the City's building code. (The BOCA National Building Code/1993)
13. Stair construction in Use Group R-3 & R-4 is a minimum of 9" tread and 8-1/4" maximum rise. All other Use Group minimum 11" tread, 7" maximum rise.
14. Headroom in habitable space is a minimum of 7'6".
15. The minimum headroom in all parts of a stairway shall not be less than 80 inches.
16. All construction and demolition debris must be disposed at the city's authorized reclamation site. The fee rate is attached. Proof of such disposal must be furnished to the office of Inspection Services before final certificate of occupancy is issued or demolition permit is granted.
17. Section 25-135 of the Municipal Code for the city of Portland states, "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year".
18. The builder of a facility to which Section 4594-C of the Maine State Human Rights Act, Title 5 MSA refers, shall obtain a certification from a design professional that the plans of the facility meet the standards of construction required by this section. Prior to commencing construction of the facility, the builder shall submit the certification to the Division of Inspection Services.
19. This permit does not excuse the applicant from obtaining any license which may be needed from the City Clerk's Office.


P. Samuel Hoffses, Chief of Inspection Services

/el 3/16/95

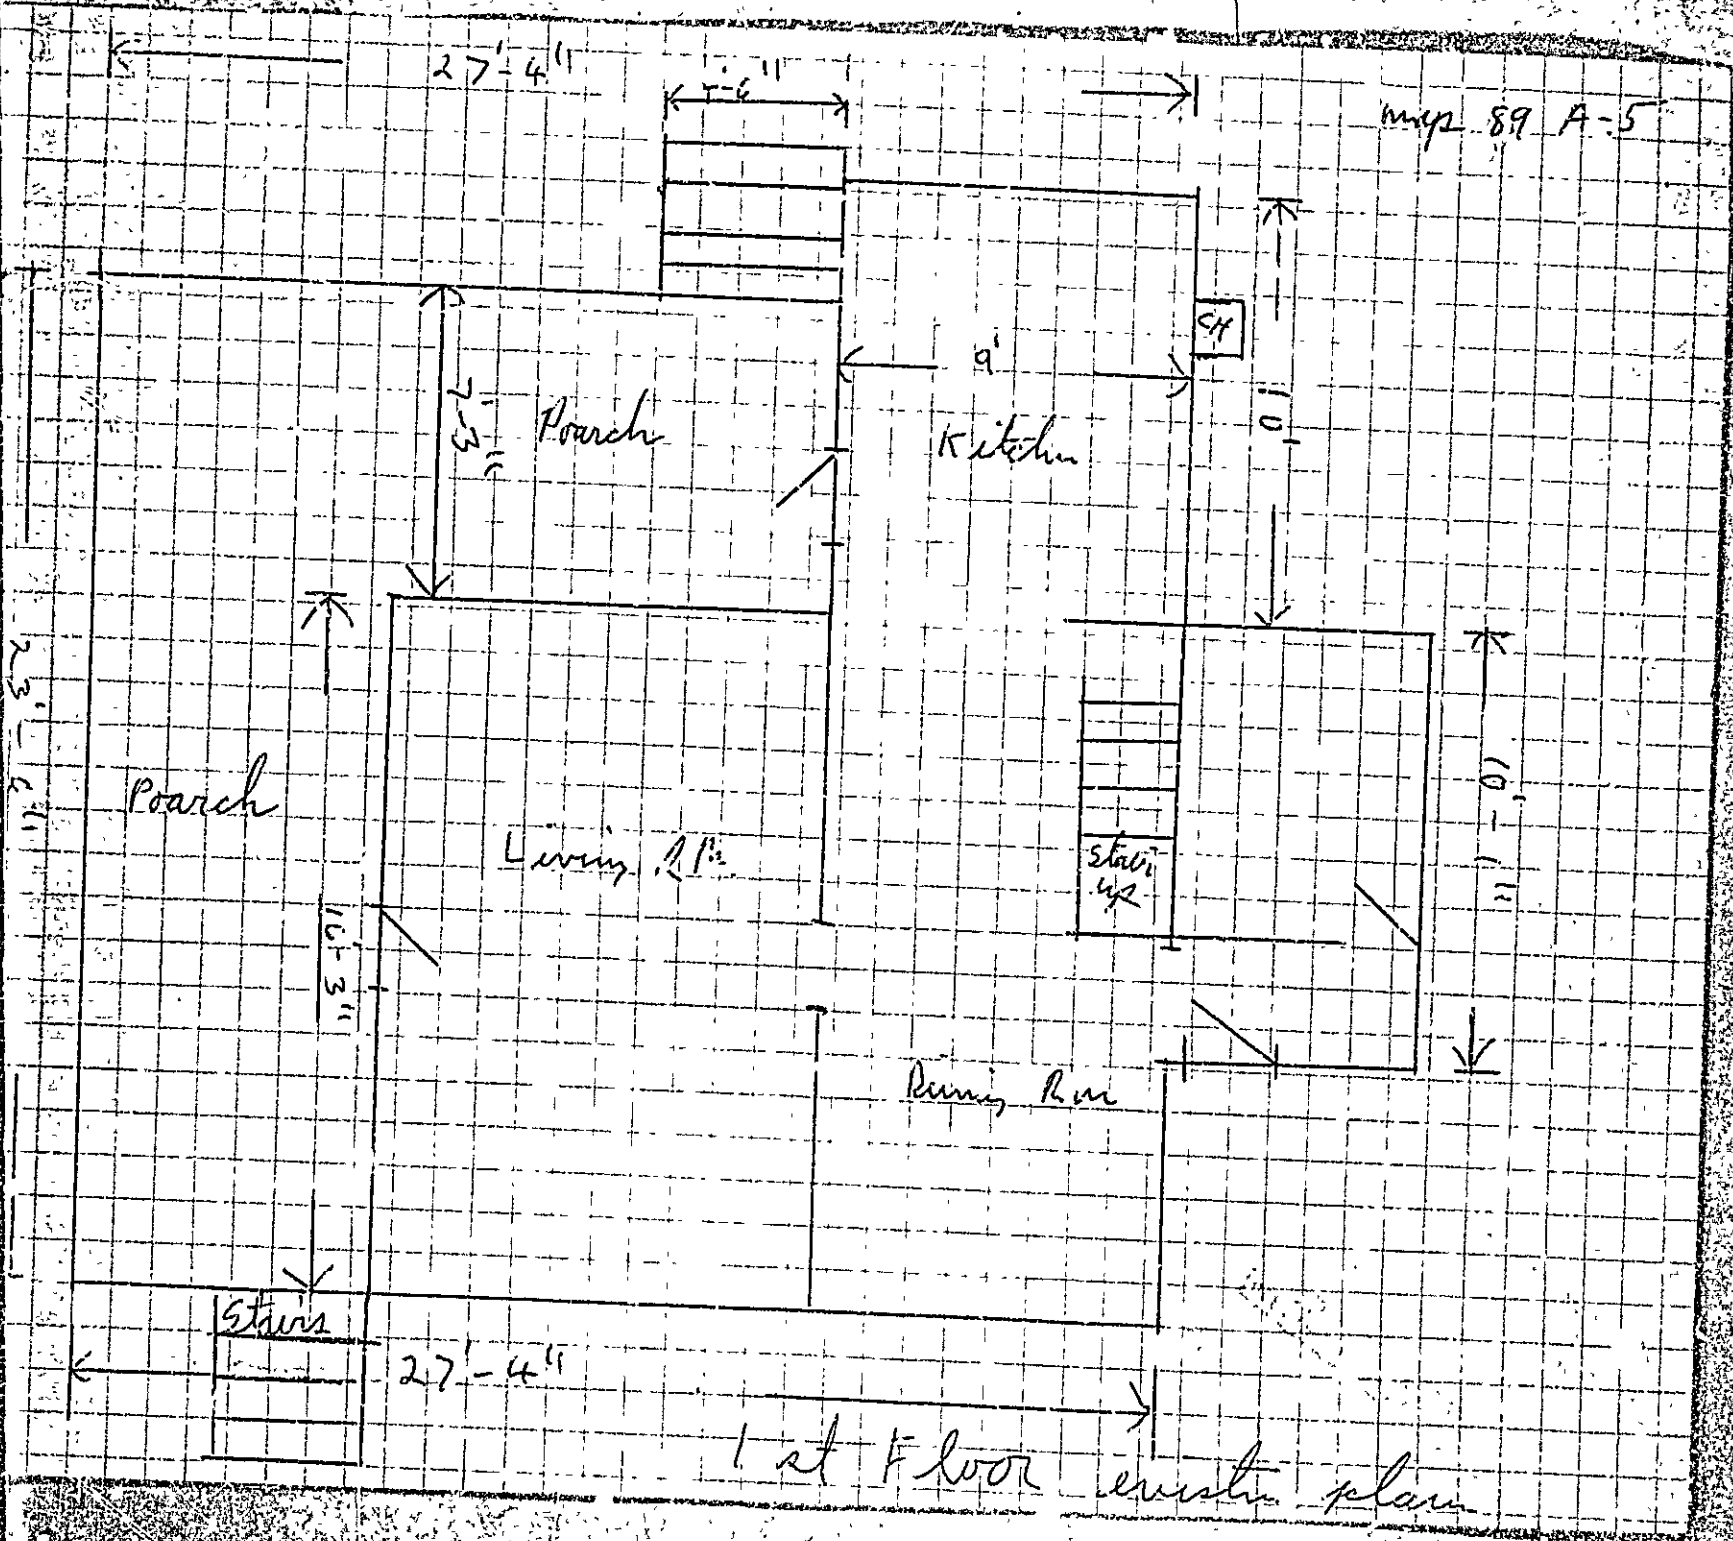

map 89 A-5

1st Floor master plan

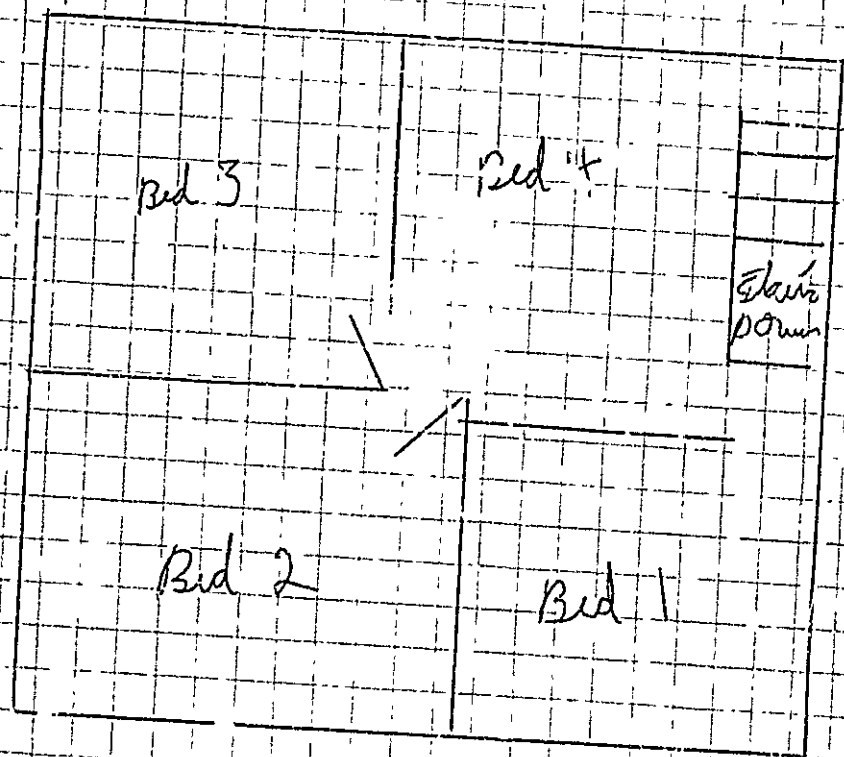

2nd floor ejection plan

proposed add on our kitchen Bed 4

10 x 13

Bed 4 is where hall
way will be

Bed 4


Bed 3

Hall

Stairs
Down

Bed 2

Bed 1



2x8 Rafters 2' O.C.
collar ties every rafter

1x5 T.G. spruce siding

2x4 knee wall

1x5 spruce T.G. flooring

2x10 Floor joist
16" O.C.

2x4 stud wall 16" O.C.
1/2" Cedar Plywood

3/4" T.S. Ply

2x8 Floor joist
16" O.C.

2x12 Beam

2x4 ledger

4x6 square treated posts
to be 5' O.C.
posts to be painted to core

10" round tube 4' in
depth on ledge

5' x 4'

rebuild kitchen
to be

10 x 13

door
to be
replaced
with
8" rise
9 1/4" tread

1st floor changes kitchen to be
4' wider

