
Lot #24 Continental Drive



APPLICATION FOR PERMIT
DEPARTMENT OF BUILDING INSPECTIONS SERVICES
ELECTRICAL INSTALLATIONS

Date Sept. 9, 19 77
Receipt and Permit number A03182

To the CHIEF ELECTRICAL INSPECTOR, Portland, Maine:

The undersigned hereby applies for a permit to make electrical installations in accordance with the laws of Maine, the Portland Electrical Ordinance, the National Electrical Code and the following specifications:

LOCATION OF WORK: Lot # 24 Continental Drive

OWNER'S NAME: Polisky ADDRESS: _____

OUTLETS: (number of)

Lights 1-30

Receptacles _____

Switches _____

Plugmold _____ (number of feet)

TOTAL _____

FEES

3.00

FIXTURES: (number of)

Incandescent _____

Fluorescent _____ (Do not include strip fluorescent)

TOTAL _____

Strip fluorescent, in feet _____

SERVICES:

Permanent, total am, 200

Temporary _____

METERS: (number of) 1

MOTORS: (number of)

Fractional _____

1 HP or over _____

RESIDENTIAL HEATING:

Oil or Gas (number of units) _____

Electric (number of rooms) 8

COMMERCIAL OR INDUSTRIAL HEATING:

Oil or Gas (by a main boiler) _____

Oil or Gas (by separate units) _____

Electric (total number of kws) _____

APPLIANCES: (number of)

Ranges X

Cook Tops _____

Wall Ovens _____

Dryers X

Fans _____

TOTAL _____

Water Heaters _____

Disposals _____

Dishwashers _____

Compactors _____

Others (denote) washer

4.50

MISCELLANEOUS: (number of)

Branch Panels _____

Transformers _____

Air Conditioners _____

Signs _____

Fire/Burglar Alarms _____

Circus, Fairs, etc. _____

Alterations to wires _____

Repairs after fire _____

Heavy Duty, 220v outlets _____

Emergency Lights, battery _____

Emergency Generators _____

INSTALLATION FEE DUE: _____

FOR ADDITIONAL WORK NOT ON ORIGINAL PERMIT DOUBLE FEE DUE: _____

FOR REMOVAL OF A "STOP ORDER" (304-16.b) _____

FOR PERFORMING WORK WITHOUT A PERMIT (304-9) _____

TOTAL AMOUNT DUE: _____

19.00

INSPECTION:

Will be ready on _____, 19____; or Will Call X

CONTRACTOR'S NAME: C. A. DeSimone

ADDRESS: 116 Orchard R. Cumb

TEL.: 829-4123


MASTER LICENSE NO.: 594

LIMITED LICENSE NO.: _____

SIGNATURE OF CONTRACTOR:

C. A. DeSimone


INSPECTOR'S COPY



P. O. Box E
Biddeford, Maine 04005

ROBERT PAWLOSKI
LOT # 24
CONTINENTAL DRIVE
PLOT PLAN

CITY WATER & SEWER
SCALE 1" = 28'
STREET ELEVATION = +0
POINT 1 (1ST FLOOR) = +5
POINTS 2, 3, 4 & 5 = +3.5
ALL POINTS IN REFERENCE
TO CENTER OF ROAD.
Point 8 = +2
Point 6 = +5
Point 7 = +4

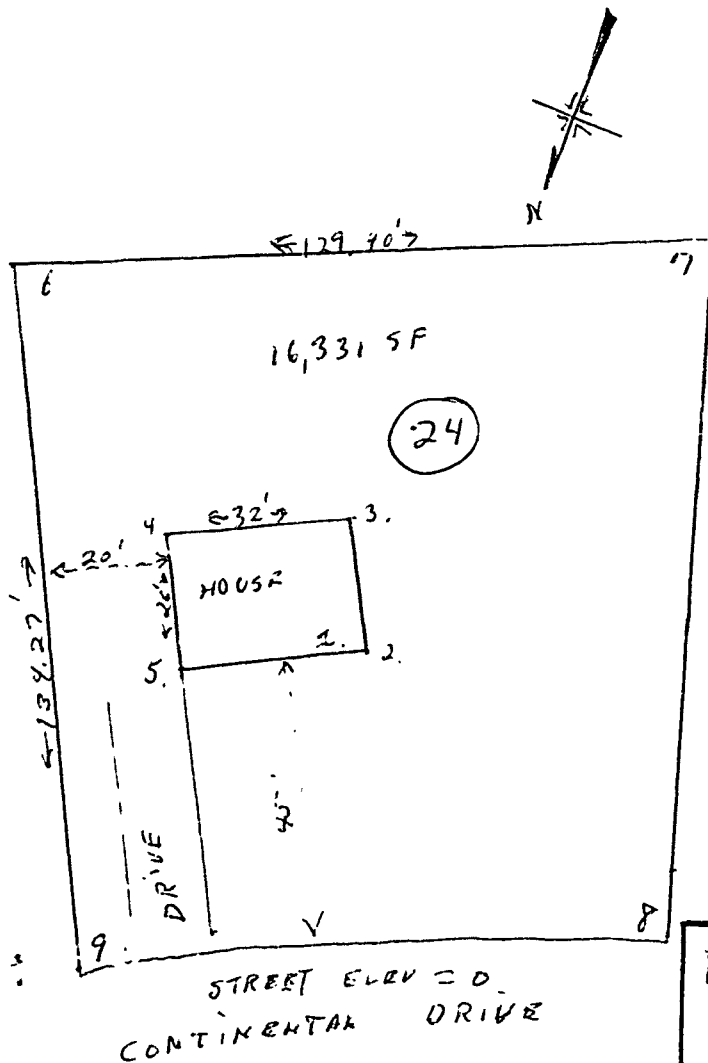

231 025381 203

FHA Set

RECEIVED - HUD - FHA BY

JUN 8 1977

CODE CASH SCH.

RECEIVED

JUL 27 1977

DEPT. OF BLDG. INSP.
CITY OF PORTLAND

Applicant: *ROBERT J. HARRIS*
Address: *LOT 24 CO. 100 100 100*
Assessors #: *3. 10 - 10 - 10*

Date: *2/4/64*

CHECK LIST AGAINST ZONING ORDINANCE

- ✓ Date - *1/10/64*
- ✓ Zone Location - *1-1*
- ✓ Interior or corner lot -
- 40-ft. setback area (Section 21) -
- ✓ Use - *24. 100 100 100*
- ✓ Sewage Disposal - *100 100*
- ✓ Rear Yards - *25' ± 25' MIN.*
- ✓ Side Yards - *20' - 20' ± 10' 10' MIN.*
- ✓ Front Yards - *45' - 25' MIN.*
- ✓ Projections - *NONE*
- ✓ Height - *1 1/2 STORY - 35' MAX.*
- ✓ Lot Area - *16,331 sq. ft. - 10,000 sq. ft. MIN.*
- ✓ Building Area - *835 sq. ft. - 3,000 sq. ft. MAX.*
- ✓ Area per Family - *16,331 sq. ft. - 10,000 sq. ft. MIN.*
- ✓ Width of Lot - *100' - 100' MIN.*
- ✓ Lot Frontage - *75' - 45' 10' "*
- ✓ Off-street Parking - *YES*
- Loading Bays -
- Site Plan -

Lot ontinental Drive

August 4, 1977

Shekara & Nadeau
P.O. Box E.
Biddeford, Maine 04005

c.c. Robert Pawloski
89 Salem St.

Gentlemen:

Permit to construct a 26'x32' cape as per plan is issued herewith subject to the following Building Code requirements.

"Before" any work is started on this project, please verify the answers to the following Building Code discrepancies in a return letter to this office.

No less than a 4x10 header required over the bay window.
The built up 6x10 girder is permissible, however. Please be advised that there are to be no splices "between bearings".

The half inch anchor bolt are required to be placed at the corners and 6 feet on centers, instead of the 8 ft. on centers indicated on the plan.

No framing or supports of the outside wooden platform is shown. Please provide us with a sketch showing the framing and supports of this platform.

The plans indicate an 8" foundation wall, the Building Code of the City of Portland requires a straight 10" foundation wall.

Very truly yours,

Earle S. Smith
Plan Examiner

ESS:k



APPLICATION FOR PERMIT

B.O.C.A. USE GROUP

B.O.C.A. TYPE OF CONSTRUCTION

ZONING LOCATION R-1 PORTLAND, MAINE, July 27, 1977

PERMIT ISSUED

AUG 5 1977

CITY OF PORTLAND

To the DIRECTOR OF BUILDING & INSPECTION SERVICES, PORTLAND, MAINE

The undersigned hereby applies for a permit to erect, alter, repair, demolish, move or install the following building, structure, equipment or change use in accordance with the Laws of the State of Maine, the Portland B.O.C.A. Building Code and Zoning Ordinance of the City of Portland with plans and specifications, if any, submitted herewith and the following specifications:

LOCATION 401 24 Continental Drive Fire District #1 ☐ #2 ☐
1 Owner's name and address Robert Farkowski 89 Salem St. Telephone 282-2236
2 Lessee's name and address Telephone 282-2236
3 Contractor's name and address Sheltra & Nadeau P.O. Box X Biddeford Telephone 282-2236
4 Architect Specifications Plans No. of sheets
Proposed use of building dwelling No. families 1
Last use No. families
Material No. stories Heat Style of roof Roofing
Other buildings on same lot 26,000
Estimated contractual cost \$ 24,000 Fee \$ 104

FIELD INSPECTOR—Mr. GENERAL DESCRIPTION

This application is for: @ 775-5451 To construct 26'x32' cape as per plans
Dwelling Ext. 234

Masonry Bldg. PERMIT (unfinished upstairs)

Metal Bldg. WITH LETTER

Alterations Stamp of Special Conditions

Demolitions

Change of Use

Other

NOTE TO APPLICANT: Separate permits are required by the installers and subcontractors of heating, plumbing, electrical and mechanicals.

PERMIT IS TO BE ISSUED TO ☐ 1 ☐ 2 ☒ 3 ☐ 4

Other

DETAILS OF NEW WORK

Is any plumbing involved in this work? yes Is any electrical work involved in this work? yes

Is connection to be made to public sewer? yes If not, what is proposed for sewage?

Has septic tank notice been sent? Form notice sent?

Height average grade to top of plate 2'6" Height average grade to highest point of roof 20'

Size, front 32 depth 26 No. stories 2 solid or filled land? earth or rock?

Material of foundation concrete thickness, top 10" bottom cellar

Kind of roof pitch Rise per foot 11/12 Roof covering asphalt shingles

No. of chimneys 1 Material of chimneys brick Kind of heat elec. fuel

Framing Lumber—Kind SPF Dressed or full size? 4x4 Corner posts 4x4 Sills 2x10

Size Girder 4-2x10 Columns under girders lally Size 4" Max. on centers 9'

Studs (outside walls and carrying partitions) 2x4-16" O. C. Bridging in every floor and flat roof span over 8 feet.

Joists and rafters: 1st floor 2x10 2nd 3rd roof 2x10

On centers: 1st floor 16" 2nd 3rd roof 16"

Maximum span: 1st floor 2nd 3rd roof

If one story building with masonry walls, thickness of walls? height?

IF A CHANGE

No. cars now accommodated on same lot 4, to be accommodated 4 number commercial cars to be accommodated

Will automobile repairing be done other than minor repairs to cars habitually stored in the proposed building?

APPROVALS BY: DATE MISCELLANEOUS

BUILDING INSPECTION—PLAN EXAMINER Will work require disturbing of any tree on a public street?

ZONING: OK MA 8/1/77 Will there be in charge of the above work a person competent

BUILDING CODE: OK MA 8/1/77 to see that the State and City requirements pertaining thereto

Fire Dept.: are observed? yes

Health Dept.: Others:

Signature of Applicant Thomas C. Mulla Phone #

Type Name of above Thomas Sheltra 1 ☐ 2 ☐ 3 ☐ 4 ☐

Other

and Address

FIELD INSPECTOR'S COPY

