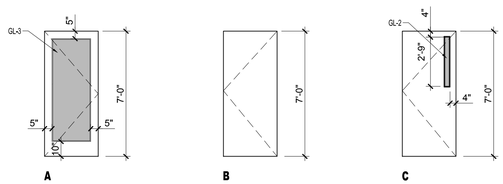

1 DOOR TYPES
3/4" = 1'-0"

FRAME TYPES



NOTES:
1. EXTERIOR DOOR JAMBS TO BE SEALED TO THIER ROUGH OPENINGS USING LOW EXPANDING FOAM, BACKER ROD OR CAULKING.
2. ALL EXTERIOR DOORS TO BE WEATHER STRIPPED
3. ALL INTERIOR DOORS TO BE SOLID CORE
4. ALL DOOR HARDWARE TO BE 'LEVER' TYPE ACCESSIBLE HARDWARE

GLAZING SCHEDULE

KEY	GLAZING TYPE
GL-1	INSULATED CLEAR TEMPERED GLAZING
GL-2	FIRE RATED INSULATED GLAZING
GL-3	CLEAR TEMPERED GLASS
GL-4	CLEAR INSULATED TEMPERED GLASS
GL-5	FIRE RATED GLAZING

DOOR SCHEDULE

DOOR								FRAME					GENERAL			
		SIZE									DETAILS					
DOOR NO.	TYPE	WIDTH	HEIGHT	THICKNESS	MATERIAL	FINISH	INSULATED	TYPE	MATERIAL	THRESHOLD	HEAD	JAMB	SILL	CLOSER	FIRE RATING (MINUTES)	HARDWARE KEY MLS - MORTISE LOCK SET LS - LOCK SET PR - PRIVACY SET PS - PASSAGE SET LP - LEVER PULL PH - PEEPHOLE LENSE NOTE: FOR DOOR HARDWARE SEE DOOR HARDWARE SPECIFICATION SECTION 08710 REMARKS
100.1	EX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
100.2	A	VIF	VIF	VIF	AL	PTD	Y	-	AL	-	-	-	-	-	-	MATCH EXISTING DOOR DIMENSIONS - INSTALL IN EXISTING FRAME
107.1	B	3'-0"	7'-0"	1-3/4"	WD	PTD	N	2	STL	-	-	-	-	-	-	
109.1	EX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
110.1	B	3'-0"	7'-0"	1-3/4"	WD	PTD	Y	2	STL	-	-	-	-	Y	-	-
111.1	C	3'-0"	7'-0"	1-3/4"	AL	PTD	Y	2	STL	AL	-	-	-	Y	60	- PANIC HARDWARE
112.1	C	3'-0"	7'-0"	1-3/4"	AL	PTD	Y	2	STL	AL	-	-	-	Y	60	- PANIC HARDWARE
112.1	EX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

DOOR NOTES:

1.) ALL EXTERIOR GLAZING TO BE LOW-E ARGON FILLED INSULATED GLAZING UNITS

2.) FRAME ALL OPENINGS WITH ELEVATIONS

3.) SEAL EXTERIOR DOORS TO ROUGH OPENING WITH LOW EXPANDING FOAM INSULATION - SEE DETAILS

4.) ALL DOOR HARDWARE TO BE 'LEVER' TYPE

5.) ALL EXTERIOR DOORS TO BE WEATHERSTRIPPED

REGISTERED ARCHITECT
RYAN J. SENATORE
No. 3322
STATE OF MAINE

© 2016 RYAN SENATORE ARCHITECTURE

CONG TU BOT - RESTAURANT FIT-UP

59 WASHINGTON AVENUE
PORTLAND, MAINE

RSA
RYAN SENATORE
ARCHITECTURE
565 CONGRESS STREET
PORTLAND, MAINE 04101
207-650-6414
senatorearchitecture.com

CONSULTANTS:

REVISIONS:

DATE:	17, OCTOBER 2016
PROJECT No.	1643
DRAWN BY:	JPF, RJS
CHECKED BY:	RJS
SCALE:	AS NOTED

SHEET TITLE:
DOOR SCHEDULE

A7-0