GENERAL DOOR & FRAME NOTES

1. ALL DOORS SHALL BE LOCATED 3" OFF ADJACENT WALL (WALL TO FRAME) EXCEPT WHERE NOTES OR DIMENSIONS STATE OTHERWISE.
2. PROVIDE MIN. OF 20 GA. DOUBLE STUDS AT ALL DOOR JAMBS. REFER TO STRUCTURAL DRAWINGS FOR BUILT-UP COLUMN LOCATIONS.
3. ALL DOOR THICKNESS TO BE 1 3/4" UNLESS NOTED OTHERWISE.
4. ALL FLOOR MATERIAL TRANSITIONS SHALL OCCUR UNDER DOOR IN CLOSED POSITION.
5. HOLLOW METAL DOOR & FRAME DETAIL REFERENCES ARE LOCATED ON SHEETS
6. ALL GLASS IN DOORS AND SIDELIGHTS SHALL BE TEMPERED TO MEET CODE
7. ALL DOORS WITH FIRE RATING SHALL HAVE CLOSER HARDWARE & AND LABEL INDICATING FIRE RATING (LABEL SHALL NOT BE PAINTED)
8. REVIEW HARDWARE OPTIONS WITH OWNERS INCLUDING KEYING
9. REUSE EXISTING BRICK OFFICE DOOR FRAES & DOORS IN WAREHOUSE OFFICES & ROOMS
10. EXISTING DOORS TO BE REUSED ARE DOOR TYPE A
11. ALL DOORS SHALL HAVE LEVER TYPE HARDWARE MEETING ADA REQUIREMENTS, EXCEPT DOORS INDICATED WITH PANIC HARDWARE

WINDOW SCHEDULE

MARK	SIZE		FRAME MAT.	NOTES
	WIDTH	HEIGHT		
A	3'-0"	6'-0"	HM	FIRE LITE GLAZING
A	3'-0"	6'-0"	HM	FIRE LITE GLAZING
A	3'-0"	6'-0"	HM	FIRE LITE GLAZING
A	3'-0"	6'-0"	HM	FIRE LITE GLAZING
B	3'-0"	4'-0"	WOOD	1/4" TEMPERED
B	3'-0"	5'-2"	WOOD	1/4" TEMPERED
B	3'-0"	4'-0"	WOOD	1/4" TEMPERED
C	3'-0"	4'-0"	HM	1/4" TEMPERED
C	3'-0"	4'-0"	HM	1/4" TEMPERED
C	3'-0"	4'-0"	HM	1/4" TEMPERED
C	3'-0"	4'-0"	HM	1/4" TEMPERED
D	3'-10"	5'-2"	ULTREX	MARVIN INTEGRITY SINGLE HUNG
D	3'-10"	5'-2"	ULTREX	MARVIN INTEGRITY SINGLE HUNG
D	3'-10"	5'-2"	ULTREX	MARVIN INTEGRITY SINGLE HUNG
D	3'-10"	5'-2"	ULTREX	MARVIN INTEGRITY SINGLE HUNG
D	3'-10"	5'-2"	ULTREX	MARVIN INTEGRITY SINGLE HUNG
D	3'-10"	5'-2"	ULTREX	MARVIN INTEGRITY SINGLE HUNG
D	3'-10"	5'-2"	ULTREX	MARVIN INTEGRITY SINGLE HUNG
D	3'-10"	5'-2"	ULTREX	MARVIN INTEGRITY SINGLE HUNG
D	3'-10"	5'-2"	ULTREX	MARVIN INTEGRITY SINGLE HUNG
D	3'-10"	5'-2"	ULTREX	MARVIN INTEGRITY SINGLE HUNG
D	3'-10"	5'-2"	ULTREX	MARVIN INTEGRITY SINGLE HUNG
D	3'-10"	5'-2"	ULTREX	MARVIN INTEGRITY SINGLE HUNG
D	3'-10"	5'-2"	ULTREX	MARVIN INTEGRITY SINGLE HUNG
D	3'-10"	5'-2"	ULTREX	MARVIN INTEGRITY SINGLE HUNG
D	3'-10"	5'-2"	ULTREX	MARVIN INTEGRITY SINGLE HUNG
D	3'-10"	5'-2"	ULTREX	MARVIN INTEGRITY SINGLE HUNG
D	3'-10"	5'-2"	ULTREX	MARVIN INTEGRITY SINGLE HUNG

DOOR AND FRAME SCHEDULE

DOOR							Type	FRAME		FIRE RATING LABEL	HARDWARE				NOTES
Room	Mark	SIZE			MATL	GLAZING		MAT	TYPE		CLOSER	PANIC HRDW	SET NO	KEYSIDE RM NO	
		WD	HGT	THK											
100	1001	3'-0"	7'-0"	1 3/4"	AL	5/8" INSULATED	B	AL	5	--	✓	✓	--	--	--
100	1002	8'-4"	8'-4"	1 3/4"	INSULATED ST	5/8" INSULATED	OA	--	--	--			--	--	--
100	1003	8'-4"	8'-4"	1 3/4"	INSULATED ST	5/8" INSULATED	OA	--	--	--			--	--	--
100	1004	3'-0"	7'-0"	1 3/4"	AL	5/8" INSULATED	B	AL	2	--	✓	✓	--	--	Coordinate with storefront
100	1005	3'-0"	7'-0"	1 3/4"	AL	FIRE RATED	B	AL	2	1HR	✓	✓	--	--	
100	1006	6'-0"	7'-0"	1 3/4"	WOOD	FIRE RATED	DD	HM	--	1HR	✓	✓	--	--	Magnetic hold opens
102	1021	3'-0"	6'-8"	1 3/4"	--	--	EX	HM	HM	--	✓		--	--	Existing door and frame
102	1022	3'-0"	6'-8"	1 3/4"	WOOD	--	A	HM	1	--	✓		--	--	--
103	1031	6'-0"	8'-0"	NA	HM	--	SL	WOOD	--	--			--	--	Rehang sliding fire door
103	1032	3'-0"	7'-0"	1 3/4"	WOOD	1/4" TEMPERED	F	WOOD	6	--			--	--	--
104	1041	3'-0"	7'-0"	1 3/8"	WOOD	1/4" TEMPERED	F	WOOD	6	--			--	--	Barn type slider
105	1051	3'-0"	6'-8"	1 3/4"	HM	--	A	--	1	45 MIN	✓		--	--	--
106	1061	3'-0"	6'-8"	1 3/4"	HM	--	A	HM	1	1 HR	✓		--	--	--
107	1071	3'-0"	6'-8"	1 3/4"	WOOD	--	EX	HM	2	--			--	--	Relocate existing
108	1081	3'-0"	6'-8"	1 3/4"	WOOD	--	EX	HM	2	--			--	--	Relocate existing
109	1091	6'-0"	7'-0"	1 1/4"	WOOD	1/4" TEMPERED	FF	WOOD	6	--			--	--	4 Doors - 2 fixed, 2 sliding
110	1101	3'-0"	6'-8"	1 3/4"	WOOD	1/4" TEMPERED	F	WOOD	6	--			--	--	--
112	1121	3'-0"	6'-8"	1 3/4"	WOOD	1/4" TEMPERED	F	WOOD	6	--			--	--	--
113	1131	3'-0"	6'-8"	1 3/4"	WOOD	1/4" TEMPERED	E	WOOD	6	--			--	--	--
115	1151	3'-0"	6'-8"	1 3/4"	EX	EX	EX	EX	EX	--	✓		--	--	Existing
115	1152	3'-0"	6'-8"	1 3/4"	WOOD	1/4" TEMPERED	E	WOOD	6	--	✓		--	--	--
116	1161	3'-0"	6'-8"	1 3/4"	WOOD	--	A	WOOD	6	--			--	--	Relocate existing, sprinkled smoke tight
117	1171	3'-0"	6'-8"	1 3/4"	WOOD	--	A	WOOD	6	--			--	--	--
119	1191	3'-0"	6'-8"	1 3/4"	WOOD	--	EX	WOOD	6	--			--	--	Relocate existing, sprinkled smoke tight
120	1201	3'-0"	6'-8"	1 3/4"	WOOD	--	EX	WOOD	6	--			--	--	Relocate existing
121	1211	3'-0"	6'-8"	1 3/4"	EX	--	EX	EX	EX	--	✓		--	--	Existing door and frame
121	1212	8'-0"	8'-0"	1 3/4"	INSL ST	--	OB	--	--	--			--	--	Insulated solid
121	1213	8'-0"	8'-0"	1 3/4"	INSL ST	--	OB	--	--	--			--	--	Insulated solid
121	1214	8'-0"	8'-0"	1 3/4"	ST	--	OH	--	--	1HR	✓		--	--	Rolling fire shutter, on electric hold open
121	1215	6'-0"	7'-0"	1 3/4"	HM	--	DD	HM	3	1HR	✓	✓	--	--	--
123	1231	3'-0"	6'-8"	1 3/4"	HM	1/4" TEMPERED	E	HM	1	--			--	--	--
124	1241	3'-0"	6'-8"	1 3/4"	HM	--	EX	EX	--	--	✓		--	--	Existing door and frame
125	1251	3'-0"	6'-8"	1 3/4"	WOOD	--	EX	EX	--	--			--	--	Existing door and frame
125	1252	6'-0"	6'-8"	1 3/4"	WOOD	--	EX	EX	--	--			--	--	Existing door and frame
126	1261	6'-0"	6'-8"	1 3/4"	WOOD	--	EX	EX	--	1HR	✓		--	--	Existing door and frame, add closer
126	1262	8'-0"	8'-0"	1 3/4"	EX	--	EX	--	--	--			--	--	Existing overhead
127	1271	3'-0"	6'-8"	1 3/4"	HM	--	A	HM	1	--			--	--	Ada hardware
128	1281	3'-0"	6'-8"	1 3/4"	HM	--	A	HM	1	1HR	✓		--	--	Ada hardware
129	1291	3'-0"	6'-8"	1 3/4"	HM	--	A	HM	1	--			--	--	Ada hardware
130	1301	3'-0"	6'-8"	1 3/4"	HM	--	A	HM	1	1HR	✓		--	--	Ada hardware
131	1311	4'-0"	7'-0"	NA	--	--	--	WD	--	--			--	--	Cased opening
131	1312	4'-0"	7'-0"	NA	--	--	--	WD	--	--			--	--	Cased opening
132	1321	8'-0"	7'-0"	NA	--	--	--	NA	--	--			--	--	New masonry opening
133	1331	3'-0"	6'-8"	1 3/4"	WOOD	--	E	HM	1	--			--	--	Door seals for smell
133	1332	3'-0"	6'-8"	1 3/4"	WOOD	--	E	HM	1	--	✓		--	--	Door seals for smell
134	1341	3'-0"	6'-8"	1 3/4"	WOOD	--	E	HM	1	--	✓		--	--	Door seals for smell
135	1351	3'-0"	6'-8"	1 3/4"	WOOD	--	E	HM	1	--	✓		--	--	Door seals for smell
137	1371	6'-0"	6'-8"	NA	--	--	--	HM	3	--			--	--	Cased opening
138	1381	3'-0"	6'-8"	1 3/4"	HM	--	A	HM	2	--	✓		--	--	New opening
138	1382	12'-0"	8'-0"	1 3/4"	--	--	--	--	--	--			--	--	--
138	1383	8'-3"	8'-0"	1 3/4"	--	--	--	NA	--	--			--	--	Existing
138	1384	8'-3"	8'-0"	1 3/4"	--	--	--	NA	--	--			--	--	Existing
138	1385	8'-3"	8'-0"	1 3/4"	--	--	--	NA	--	--			--	--	Existing
138	1386	8'-3"	8'-0"	1 3/4"	--	--	--	NA	--	--			--	--	Existing
138	1387	8'-3"	8'-0"	1 3/4"	--	--	--	NA	--	--			--	--	Existing
138	1388	8'-3"	8'-0"	1 3/4"	--	--	--	NA	--	--			--	--	Existing
138	1389	8'-3"	8'-0"	1 3/4"	--	--	--	NA	--	--			--	--	Existing
139	1391	3'-0"	6'-8"	1 3/4"	--	--	EX	--	--	--			--	--	Existing
140	1401	3'-0"	6'-8"	1 3/4"	--	--	EX	--	--	--			--	--	Existing
140	1402	3'-0"	6'-8"	1 3/4"	--	--	EX	--	--	--			--	--	Existing
141	1411	3'-0"	6'-8"	1 3/4"	WOOD	--	EX	EX	--	--			--	--	Existing door and frame
142	1421	3'-0"	6'-8"	1 3/4"	--	--	--	EX	--	--			--	--	Existing
138	13810	8'-3"	8'-0"	1 3/4"	--	--	--	NA	--	--			--	--	Existing

DOOR TYPES

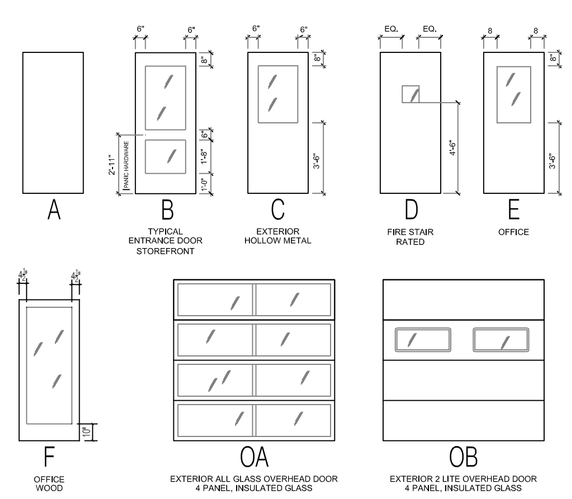

HOLLOW METAL FRAME ELEVATIONS

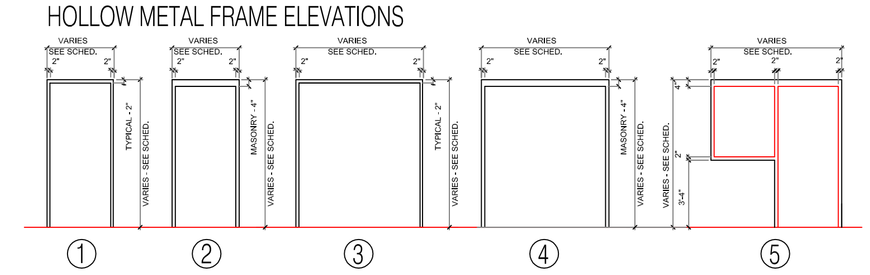

WOOD FRAME ELEVATIONS



PROSPECT DESIGN
ARCHITECTURE | EXHIBITIONS
207-749-7400 | prospectdesign.me

HEMESphere DESIGN LLC

CONSTRUCTION

DIAMOND ST. WAREHOUSE RENOVATION
1-11 DIAMOND ST. PORTLAND, ME
A.D. BEANER, LLC

SHEET TITLE
DOOR AND WINDOW SCHEDULE

PERMIT SET

REVISION

DRAWN BY: BB

DATE: March 12, 2013

A-602