SYMBOLS

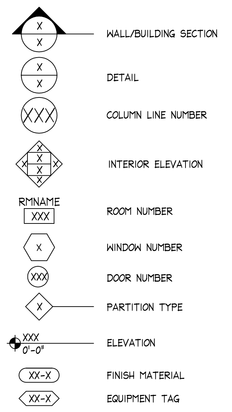

MATERIALS



ABBREVIATIONS

THE FOLLOWING ABBREVIATIONS ARE USED TYPICALLY ON THE CONSTRUCTION DOCUMENTS IF ABBREVIATIONS ARE USED THAT ARE NOT ON THIS LIST, IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO CONFIRM THEIR DEFINITION PRIOR TO SIGNING THE CONTRACT.

AFF	ABOVE FINISH FLOOR
AP	ACCESS PANEL
ACT	ACOUSTICAL CEILING TILE
ADJ	ADJUST, ADJUSTABLE
AC	AIR CONDITIONING
AHU	AIR HANDLING UNIT
AL,ALUM	ALUMINUM
APPROX	APPROXIMATE
ARCH	ARCHITECT(URAL)
@	AT
BLKG	BLOCKING
BD	BOARD
BLDG	BUILDING
CAB	CABINET
CG	CORNER GUARD
CPT	CARPET
CLG	CEILING
CL	CLEAR, CENTERLINE
CT	CERAMIC TILE
CLOS	CLOSET
CJ	CONTROL JOINT
COL	COLUMN
CONC	CONCRETE
CMU	CONCRETE MASONRY UNIT
CONST	CONSTRUCTION
CONT	CONTINUOUS
CO	CLEAN OUT
CORR	CORRUGATED
DBL	DOUBLE
DTL	DETAIL
DIAG	DIAGONAL
DIAM,D	DIAMETER
DIM	DIMENSION
DN	DOWN
DWG	DRAWING
DF	DRINKING FOUNTAIN
DS	DOWN SPOUT
(E)	EXISTING
E	EAST
EA	EACH
EIFS	EXTERIOR INSULATING FINISH SYSTEM
ELEC	ELECTRICAL
ELEV,EL	ELEVATION, ELEVATOR
EMER	EMERGENCY
EQ	EQUIVALENT
EQUIP	EQUIPMENT
EXH	EXHAUST
EXIST	EXISTING
EJ	EXPANSION JOINT
EXP	EXPANSION
EXT	EXTERIOR
FD	FLOOR DRAIN
FT	FEET
FF	FINISH FLOOR
FIN	FINISH
FE	FIRE EXTINGUISHER
FEC	FIRE EXTINGUISH. CABINET
FHC	FIRE HOSE CABINET
FP	FIREPROOF
FL	FLOOR, FLUSH
FLUOR	FLUORESCENT
FTG	FOOTING
FDN	FOUNDATION
GA	GAUGE
GALV	GALVANIZED
GC	GENERAL CONTRACTOR
GFRC	GLASS FIBER REINFORCED CONCRETE
GL	GLASS
GWB,GYP	GYPSUM WALLBOARD
HC	HANDICAPPED
HDW	HARDWARE
HDWD	HARDWOOD
HTG	HEATING
HVAC	HEATING, VENTILATING & AIR CONDITIONING
HT	HEIGHT
HM	HOLLOW METAL
HOR	HORIZONTAL
IN	INCHES
INCL	INCLUDE, INCLUDING
ID	INSIDE DIAMETER
INS	INSULATION
INT	INTERIOR
INV	INVERT
JC	JANITORS CLOSET
JT	JOINT
JB	JUNCTION BOX
KO	KNOCK OUT
LBL	LABEL
LAM	LAMINATE
LAV	LAVATORY
LB	POUND
LH	LEFT HAND
LTG	LIGHTING
MH	MANHOLE
MAX	MAXIMUM
MECH	MECHANICAL
MET	METAL
MIN	MINIMUM
MISC	MISCELLANEOUS
MO	MASONRY OPENING
NOM	NOMINAL
N	NORTH
NIC	NOT IN CONTRACT
NTS	NOT TO SCALE
OC	ON-CENTER
OPNG	OPENING
OPP	OPPOSITE
OD	OUTSIDE DIAMETER
OA	OVERALL
OH	OVERHEAD
PT	PAINT, PRESSURE TREATED
PR	PAIR
PERF	PERFORATED
PLAS	PLASTIC, PLASTER
PLAM	PLASTIC LAMINATE
PWD	PLYWOOD
PSF	POUNDS PER SQUARE FOOT
PSI	POUNDS PER SQUARE INCH
QT	QUARRY TILE
RAD	RADIATOR, RADIATION
R	RADIUS, RISER
RCP	REFLECTED CEILING PLAN
REQD	REQUIRED
S	SOUTH
SCHED	SCHEDULE
SD	STORM DRAIN
SLNT	SEALANT
SHT	SHEET
SIM	SIMILAR
SF	SQUARE FEET
SI	SQUARE INCHES
SQ	SQUARE
SS	STAINLESS STEEL
SSF	STAINLESS STEEL FRAME
TEL	TELEPHONE
TEMP	TEMPORARY
T&G	TONGUE & GROOVE
TOC	TOP OF CONCRETE
TOF	TOP OF FOOTING
TOP	TOP OF PARAPET
TOR	TOP OF ROOF
TOW	TOP OF WALL
TYP	TYPICAL
UON	UNLESS OTHERWISE NOTED
UL	UNDERWRITERS' LABORATORIES, INC.
UTIL	UTILITY
VB	VAPOR BARRIER, VINYL BASE
VWC	VINYL WALL COVERING
VENT	VENTILATION
VERT	VERTICAL
VCT	VINYL COMPOSITION TILE
W	WEST
WC	WALL COVERING
WSCT	WAINSCOT
WT	WEIGHT
WIN	WINDOW
W/	WITH
W/O	WITHOUT
WD	WOOD

GENERAL NOTES

1. ALL SUBCONTRACTORS TO VISIT SITE PRIOR TO SUBMITTING BIDS.

2. CONTRACTOR TO COORDINATE DELIVERY OF RACK, CONVECTION AND PIZZA OVENS PRIOR TO INSTALLATION OF REFRIGERATED EQUIPMENT IN THESE AREAS.

3. CONTRACTOR TO WATER TEST PITCH OF ALL CONCRETE SLABS TO DRAIN. TEST TO BE WITNESSED BY OWNER'S REPRESENTATIVE.

4. ALL STRUCTURAL STEEL, BARE METAL - CLEAN, TOUCH-UP WITH PAINT.

5. ALL PLYWOOD, WOOD NAILERS AND WOOD BLOCKING SHALL BE FIRE RETARDANT TREATED.



CONSTRUCTION SIGN

DRAWING LIST

CIVIL

C-1	EXISTING CONDITIONS SURVEY
C-2	SITE DEMOLITION PLAN
C-3	SITE PLAN
C-4	GRADING AND UTILITY PLAN
C-5	EROSION AND SEDIMENTATION CONTROL PLAN
C-6	LANDSCAPE PLAN
C-7	DETAILS
C-8	DETAILS

ARCHITECTURAL

A0.00	COVER SHEET
A0.01	GENERAL INFORMATION
A0.02	CODE ANALYSIS AND EGRESS PLANS
A0.03	WALL AND CEILING ASSEMBLY TYPES
A1.01	FIRST FLOOR PLAN
A1.02	MEZZANINE FLOOR PLAN
A1.03	ROOF PLAN
A1.11	FIRST FLOOR PLAN – EQUIPMENT
A1.12	FIRST FLOOR PLAN – COOLERS
A1.13	FIRST FLOOR PLAN – SLAB DEPRESSIONS
A1.14	FIRST FLOOR PLAN – FLOOR FINISHES
A1.15	FIRST FLOOR PLAN – WALL FINISHES
A1.16	FIRST FLOOR PLAN – PAINT FINISHES
A1.21	MEZZANINE FLOOR PLAN – EQUIPMENT
A1.22	MEZZANINE FLOOR PLAN – COOLERS, SLAB DEPRESSIONS AND FLOOR FINISHES
A1.23	MEZZANINE FLOOR PLAN – WALL FINISHES AND PAINT FINISHES
A2.01	EXTERIOR ELEVATIONS
A3.01	BUILDING SECTIONS
A3.02	BUILDING SECTIONS
A3.11	WALL SECTIONS
A3.12	WALL SECTIONS
A4.01	ENLARGED FLOOR PLAN – NORTHWEST CORNER
A4.02	ENLARGED FLOOR PLAN – NORTHEAST CORNER
A4.03	ENLARGED FLOOR PLAN – SOUTHWEST CORNER
A4.04	ENLARGED FLOOR PLAN – SOUTHEAST CORNER
A4.05	ENLARGED TOILET ROOMS AND INTERIOR ELEVATIONS
A4.06	INTERIOR ELEVATIONS
A4.07	INTERIOR ELEVATIONS
A4.08	INTERIOR ELEVATIONS
A4.09	INTERIOR SECTIONS
A5.01	FIRST FLOOR REFLECTED CEILING PLAN – SOFFITS
A5.02	FIRST FLOOR REFLECTED CEILING PLAN – LIGHTING
A5.11	MEZZANINE REFLECTED CEILING PLAN – SOFFITS
A5.12	MEZZANINE REFLECTED CEILING PLAN – LIGHTING
A6.01	STAIR AND ELEVATOR PLANS AND DETAILS
A7.01	FINISH SCHEDULES AND DETAILS
A7.02	DOOR SCHEDULE, DOOR AND FRAME ELEVATIONS
A7.03	DOOR AND WINDOW DETAILS
A8.01	BUILDING DETAILS
A8.02	BUILDING DETAILS
A8.03	BUILDING DETAILS
A8.04	BUILDING DETAILS
A8.05	BUILDING DETAILS

STRUCTURAL

S1.00	COLUMN SCHEDULE AND GENERAL NOTES
S1.01	FOUNDATION PLAN
S1.02	MEZZANINE FRAMING PLAN
S1.03	MAIN ROOF FRAMING PLAN
S1.04	HIGH ROOF FRAMING PLAN
S2.01	STRUCTURAL DETAILS
S2.02	STRUCTURAL DETAILS
S2.03	STRUCTURAL DETAILS
S2.04	STRUCTURAL DETAILS

PLUMBING

P0.01	PLUMBING NOTES, SYMBOLS AND SCHEDULES
P1.01	PLUMBING – UNDER FLOOR PLAN MARKET LEVEL
P1.02	PLUMBING FLOOR PENETRATION PLAN – MARKET LEVEL
P1.03	PLUMBING ABOVE FLOOR PLAN – MARKET LEVEL
P1.04	PLUMBING FLOOR PLANS – MEZZANINE LEVEL
P1.05	PLUMBING PLAN – ROOF LEVEL
P4.01	PLUMBING ENLARGED ABOVE FLOOR PLAN – MARKET LEVEL – NORTHWEST CORNER
P4.02	PLUMBING ENLARGED ABOVE FLOOR PLAN – MARKET LEVEL – NORTHEAST CORNER
P4.03	PLUMBING ENLARGED ABOVE FLOOR PLAN – MARKET LEVEL – SOUTHWEST CORNER
P4.04	PLUMBING ENLARGED ABOVE FLOOR PLAN – MARKET LEVEL – SOUTHEAST CORNER
P6.01	EQUIPMENT SCHEDULE
P7.01	PLUMBING DETAILS
P7.02	PLUMBING DETAILS
P7.03	PLUMBING DETAILS

FIRE PROTECTION

FS1.01	FIRE SUPPRESSION – MARKET LEVEL
FS1.02	FIRE SUPPRESSION FLOOR PLAN – MEZZANINE LEVEL

H.V.A.C.

M1.01	FIRST FLOOR HVAC PLAN
M1.02	MEZZANINE HVAC PLAN
M1.03	HVAC ROOF PLAN
M6.01	HVAC SCHEDULES, HVAC NOTES, LEGEND AND ABBREVIATIONS
M7.01	HVAC DETAILS
M8.01	HVAC SEQUENCE OF OPERATIONS

ELECTRICAL

E0.01	ELECTRICAL SYMBOLS AND NOTES
EL1.01	FIRST FLOOR LIGHTING FLOOR PLAN
EL1.01A	FIRST FLOOR TRACK LIGHTING FLOOR PLAN
EL1.02	MEZZANINE LEVEL LIGHTING FLOOR PLAN
EP1.01	FIRST FLOOR POWER FLOOR PLAN
EP1.02	MEZZANINE LEVEL POWER FLOOR PLAN
EC1.01	FIRST FLOOR COMMUNICATIONS FLOOR PLAN
EC1.02	MEZZANINE LEVEL COMMUNICATIONS FLOOR PLAN
E1.03	ROOF POWER PLAN
RE1.01	REFRIGERATION POWER PLAN
E6.01	ELECTRICAL ONE LINE POWER RISER DIAGRAM
E6.02	ELECTRICAL RISERS AND SCHEDULES
E6.03	LIGHT FIXTURE SCHEDULES
E6.04	PANEL SCHEDULES
E6.05	PANEL SCHEDULES
E6.06	PANEL SCHEDULES
E6.07	EQUIPMENT SCHEDULES
E6.08	EQUIPMENT SCHEDULES

REFRIGERATION

R1.1	REFRIGERATION PLAN
R1.2	REFRIGERATION PLAN – MEZZANINE
R1.3	REFRIGERATION PIT PLAN
R2.1	REFRIGERATION LEGEND – DETAILS
R3.1	REFRIGERATION CONTROL DIAGRAM
R3.2	REFRIGERATION DETAILS

BL Companies
ARCHITECTURE
ENGINEERING
PLANNING
LANDSCAPE ARCHITECTURE
LAND SURVEYING
ENVIRONMENTAL SCIENCES
ANALYTICAL SERVICES

355 Research Parkway
Meriden, CT 06450
(203) 630-1406
(203) 630-2615 Fax

WHOLE FOODS MARKET

ISSUED FOR CONSTRUCTION

PROPOSED GROCERY STORE
2 SOMERSET STREET
PORTLAND, CUMBERLAND COUNTY, MAINE

No.	Date	Desc.

No.	Date	Desc.

REVISIONS

ARCHITECT/ENGINEER SEAL

Designed	D.B.
Drawn	J.P.
Checked	A.R.
Approved	D.B.
Scale	AS NOTED
Project No.	04C0829
Date	04-24-06
CAD File	A04C0829101

Title
GENERAL INFORMATION

Sheet No.
A0.01

THESE DRAWINGS SHALL NOT BE UTILIZED BY ANY PERSON, FIRM OR CORPORATION WITHOUT THE SPECIFIC WRITTEN PERMISSION OF BL COMPANIES

J:\Jobs\04C0829\Arch\A04C0829A01.dwg Apr 24, 2006 - 11:51 AM