ROOM FINISH SCHEDULE

NO	LOCATION	FLOOR		BASE		NORTH WALL		EAST WALL		SOUTH WALL		WEST WALL		CEILINGS			REMARKS
		MATERIAL	FINISH	MATERIAL	FINISH	MATERIAL	FINISH	MATERIAL	FINISH	MATERIAL	FINISH	MATERIAL	FINISH	MATERIAL	FINISH	HEIGHT	
FIRST FLOOR																	
101	VESTIBULE	CONC	FS-1	BRICK	-	BRICK/GWB	PT-X	GWB	PT-X	BRICK	-	GWB	PT-X	GWB	PT-E, C	23'-0"	-
102	CUSTOMER SERVICE	CONC	FS-1	EPOXY	EP-1	TILE	TP-4	TILE	TP-4	TILE	TP-4	TILE	TP-4	GWB	PT-A	9'-0"	-
103	FLORAL	CONC	FS-1	-	-	GWB	PT-D	TILE	TP-4	TILE	TP-4	GWB	PT-D	TRELLIS (MAPLE)	BS-4	8'-6"	-
104	WHOLE BODY	CONC	FS-1	-	-	-	-	-	-	-	-	-	-	OPEN TO CLEARSTORY	PT-B, C	-	SEE DETAILS FOR CLER. FINISHES
105	PRODUCE	CONC	FS-1	VINYL	BS-3	-	-	GWB	PT-E, B	GWB	PT-E, B	-	-	OPEN TO DECK	PT-C	VARIES	-
106	SALES	CONC	FS-1	VINYL	BS-3	SEE PLANS								OPEN TO DECK	PT-C	VARIES	-
107	FROZEN FOODS	CONC	FS-1	VINYL	BS-3	SEE PLANS								OPEN TO DECK	PT-C	VARIES	-
108	WINE	CONC	FS-1	-	-	-	-	-	-	-	-	-	-	WOOD TILE	-	10'-0"	-
109	SEAFOOD	CONC	FS-1	-	-	GWB	PT-E	GWB	PT-E	-	-	-	-	OPEN TO DECK	PT-C	VARIES	-
110	SEAFOOD SERVICE	EPOXY	EP-1	EPOXY	BS-1	TILE	TP-1	TILE	TP-1	-	-	-	-	ACT / GWB	ACT-2/PT-E	9'-0"/10'-6"	-
111	MEAT SERVICE	EPOXY	EP-1	EPOXY	BS-1	TILE	TP-2	TILE	TP-2	-	-	TILE	TP-2	ACT / GWB	ACT-2/PT-E	-	-
112	SPECIALTY	EPOXY	EP-1	EPOXY	BS-1	TILE	TP-3	-	-	-	-	TILE	TP-3	ACT / GWB	ACT-2/PT-E	9'-0"/10'-0"	WAINSCOT (WC-A)-SEE DWG I/A501 FOR LOCATIONS
113	CANDY ISLAND	CONC	FS-1	TILE	TP-1	-	-	-	-	-	-	-	-	GWB	PT-B	9'-0"	-
114	BAKERY SERVICE	EPOXY	EP-1	EPOXY	BS-1	TILE	TP-3	TILE	TP-3	-	-	TILE	TP-3	ACT / GWB	ACT-2/PT-E	9'-0"/10'-6"	-
115	PREPARED FOODS	CONC	FS-1	-	-	-	-	-	-	-	-	TILE	TP-3 / TP-4	OPEN TO DECK	PT-C	VARIES	-
116	DELI	EPOXY	EP-1	EPOXY	BS-1	-	-	-	-	-	-	TILE	TP-3 / TP-4	ACT / GWB	ACT-2/PT-E	9'-0"/10'-6"	-
117	PIZZA	EPOXY	EP-1	EPOXY	BS-1	-	-	-	-	-	-	TILE	TP-4A / TP-B	GWB	PT-A	12'-0"	-
118	PIZZA PREP	EPOXY	EP-1	EPOXY	BS-1	GWB / TILE	PT-A / TP-4	TILE	TP-B	-	-	-	-	GWB	PT-A	12'-0"	-
119	SEATING	CONC	FS-1	EPOXY	EP-1	GWB	PT-B	GWB	PT-B	GWB	PT-B	GWB	PT-B	WOOD	WDC-1	20'-0"	-
120	SUSHI	EPOXY	EP-1	EPOXY	BS-1	-	-	TILE	TP-4	-	-	TILE	TP-4	GWB	PT-D	9'-0"	-
121	EXPRESS CHECK-OUT	CONC	FS-1	EPOXY	EP-1	-	-	-	-	GWB	PT-B	TILE	TP-4	OPEN TO DECK	PT-C	VARIES	-
122	CHECK-OUT	CONC	FS-1	EPOXY	BS-1	-	-	-	-	GWB	PT-B	TILE	TP-4	OPEN TO DECK	PT-C	VARIES	-
123	SEATING	CONC	FS-1	EPOXY	EP-1	-	-	GWB	PT-E	GWB	PT-B	GWB	PT-B	OPEN TO DECK	PT-C	VARIES	-
124	CARTS	BRICK	-	-	-			SEE ELEV.						CEDAR	EC4	20'-2 3/4"	-
125	GARDEN CENTER	BRICK	-	-	-			SEE ELEV.						CEDAR	EC4	20'-2 3/4"	-
126	CARTS	BRICK	-	-	-			SEE ELEV.						CEDAR	EC4	20'-2 3/4"	-
127	OUTDOOR SEATING	STONE	-	-	-			SEE ELEV.						-	-	-	-
128	STAIR #1	CONC	-	VINYL	BS-3	GWB	PT-X							GWB	PT-X	-	-
129	JANITOR	CONC	-	VINYL	BS-3	GWB	PT-X							OPEN TO DECK	PT-C	-	-
130	CORRIDOR	CONC	MAPLE	BS-4	-	GWB	PT-E							GWB	PT-E	8'-0"	-
131	WOMEN	TILE	FT-X	TILE	-	GWB / TILE	PTF / TP-5							GWB	PT-C	8'-0"	-
132	WATER ROOM	CONC	-	-	-	GWB	PT-X							OPEN TO DECK	PT-C	-	-
133	MEN	TILE	FT-X	TILE	-	GWB / TILE	PT-D / TP-5							GWB	PT-C	8'-0"	-
134	SCULLERY	EPOXY	EP-1	EPOXY	BS-1	FRP	WC-C							ACT-4	-	10'-0"	-
135	DELI COOLER	EPOXY	EP-1	EPOXY	BS-1	COOLER	-	COOLER	-	COOLER	-	COOLER	-	COOLER CEILING	-	9'-0"	-
136	KITCHEN	EPOXY	EP-2	EPOXY	BS-2	SS	-	SS/FRP	-/WC-C	-	-	FRP	WC-C	ACT-4	-	10'-0"	-
137	KITCHEN PREP	EPOXY	EP-2	EPOXY	BS-2	FRP	WC-C					FRP/COOLER	WC-C/-	ACT-4	-	10'-0"	-
138	POULTRY COOLER	EPOXY	EP-1	EPOXY	BS-1	COOLER	-	COOLER	-	COOLER	-	COOLER	-	COOLER CEILING	-	9'-0"	-
139	BAKERY COOLER	EPOXY	EP-1	EPOXY	BS-1	COOLER	-	COOLER	-	COOLER	-	COOLER	-	COOLER CEILING	-	9'-0"	-
140	BAKERY	EPOXY	EP-2	EPOXY	BS-2	TILE/SS	TP-3A /-	TILE	TP-3	COOLER/FRP	-/WC-C	TILE	TP-3A	GWB / ACT-4	PT-X	10'-0"	-
141	SMOKER	EPOXY	EP-1	EPOXY	BS-1	GWB	PT-X	COOLER	-	GWB	PT-X			GWB	PT-X	9'-0"	-
142	BAKERY FREEZER	EPOXY	EP-1	EPOXY	BS-1	COOLER	-	COOLER	-	COOLER	-	COOLER	-	COOLER CEILING	-	9'-0"	-
143	BACKSTOCK	CONC	-	CONC	-	PLYWOOD	WC-G							OPEN TO DECK	PT-C	-	-
144	DAIRY COOLER	EPOXY	EP-1	EPOXY	BS-1	COOLER	-	COOLER	-	COOLER	-	COOLER	-	COOLER CEILING	-	9'-0"	-
145	CHICKEN COOLER	EPOXY	EP-1	EPOXY	BS-1	COOLER	-	COOLER	-	COOLER	-	COOLER	-	COOLER CEILING	-	9'-0"	-
146	POULTRY PREP	EPOXY	EP-1	EPOXY	BS-1	COOLER	-	COOLER	-	COOLER	-	COOLER	-	COOLER CEILING	-	9'-0"	-
147	POULTRY SINK	EPOXY	EP-1	EPOXY	BS-1	TILE	TP-2	TILE/FRP	TP-2/WC-C	FRP	WC-C	TILE	TP-2	ACT-4	-	10'-0"	-
148	BACKSTOCK	CONC	-	CONC	-	PLYWOOD	WC-G							OPEN TO DECK	PT-C	-	-
149	MEAT PREP	EPOXY	EP-1	EPOXY	BS-1	-	-	-	-	-	-	-	-	COOLER CEILING	UNPAINTED	9'-0"	-
150	MEAT COOLER	EPOXY	EP-1	EPOXY	BS-1	COOLER	-	COOLER	-	COOLER	-	COOLER	-	COOLER CEILING	-	9'-0"	-
151	BACKSTOCK	CONC	-	CONC	-	PLYWOOD	WC-G							OPEN TO DECK	PT-C	-	-
152	STAIR #2	CONC	-	VINYL	BS-3	GWB	PT-X							GWB	PT-X	-	-
153	SEAFOOD PREP	EPOXY	EP-1	EPOXY	BS-1	FRP	WC-C							ACT-4	-	10'-0"	-
154	SEAFOOD COOLER	EPOXY	EP-1	EPOXY	BS-1	COOLER	-	COOLER	-	COOLER	-	COOLER	-	COOLER CEILING	-	9'-0"	-
155	RECEIVING VESTIBULE	CONC	-	CONC	-	PLYWOOD	WC-G							OPEN TO DECK	PT-C	-	-
156	ELEVATOR	-	-	-	-	CMU	PT-H							OPEN TO DECK	PT-C	-	-
157	PRODUCE DRY	EPOXY	EP-1	EPOXY	BS-1	COOLER	-	COOLER	-	-COOLER	-	COOLER	-	COOLER CEILING	-	9'-0"	-
158	PRODUCE PREP	EPOXY	EP-1	EPOXY	BS-1	COOLER	-	COOLER	-	-COOLER	-	COOLER	-	COOLER CEILING	-	9'-0"	-
159	PRODUCE WET	EPOXY	EP-1	EPOXY	BS-1	COOLER	-	COOLER	-	-COOLER	-	COOLER	-	COOLER CEILING	-	9'-0"	-
160	REC. OFFICE	CONC	-	CONC	-	GWB	PT-C							OPEN TO DECK	PT-C	-	-
161	RECEIVING	CONC	-	CONC	-	PLYWOOD	WC-C							OPEN TO DECK	PT-C	-	-
MEZZANINE																	
201	STAIR #1	CONC	-	VINYL	BS-3	GWB	PT-X							GWB	PT-X	-	-
202	ROOF ACCESS	CONC	-	CONC	-	GWB	PT-X							OPEN TO DECK	PT-C	-	-
203	EQUIP BUYER	CONC	-	VINYL	BS-3	GWB	PT-A							ACT-3	-	9'-0"	-
204	MAIL	CONC	-	VINYL	BS-3	GWB	PT-C							ACT-3	-	9'-0"	-
205	COMM. CONFERENCE	CONC	-	VINYL	BS-3	GWB	PT-C	GWB	PT-E	GWB	PT-C	GWB	PT-C	ACT-3	-	9'-0"	-
206	CORRIDOR	CONC	-	VINYL	BS-3	GWB	PT-C							ACT-3	-	9'-0"	-
207	ACCT.	CONC	-	VINYL	BS-3	GWB	PT-C							ACT-3	-	9'-0"	-
208	CASH	CONC	-	VINYL	BS-3	GWB	PT-C							GWB	PT-C	9'-0"	-
209	SIGN MAKER	CONC	-	VINYL	BS-3	GWB	PT-C							ACT-3		9'-0"	-
210	TL	EPOXY	-	VINYL	BS-3	GWB	PT-C	GWB	PT-F	GWB	PT-C	GWB	PT-C	ACT-3	-	8'-0"	-
211	STL	EPOXY	-	VINYL	BS-3	GWB	PT-C							ACT-3	-	8'-0"	-
212	I.S. OFFICE	EPOXY	-	VINYL	BS-3	GWB	PT-C							ACT-3	-	8'-0"	-
213	ASTL	EPOXY	-	VINYL	BS-3	GWB	PT-C							ACT-3	-	8'-0"	-
214	LOUNGE	EPOXY	-	VINYL	BS-3	GWB	PT-C							ACT-3	-	8'-0"	-
215	LOCKERS	EPOXY	-	VINYL	BS-3	GWB	PT-C							ACT-3	-	9'-0"	-
216	WOMEN	TILE	FT-1	TILE	WT-X	GWB / TILE	PT-B / TP-6							GWB	PT-C	8'-0"	-
217	MEN	TILE	FT-1	TILE	WT-X	GWB / TILE	PT-B / TP-6							GWB	PT-C	8'-0"	-
218	STOCK	CONC	-	CONC	-	PLYWOOD	WC-G							ACT3	-	8'-0"	-
219	ELECTRICAL ROOM	CONC	-	CONC	-	GWB	PT-X							OPEN TO DECK	PT-C	-	-
220	WATER HEATER	CONC	-	CONC	-	GWB	PT-X							OPEN TO DECK	PT-C	-	-
221	I.S. ROOM	CONC	-	CONC	-	GWB	PT-X							ACT-3	-	9'-0"	-
223	N O T U S E D																
224	WHOLE BODY STORAGE	CONC	-	CONC	-	GWB	PT-X							GWB	PT-C	8'-0"	-
225	BEER/WINE STORAGE	CONC	-	CONC	-	GWB	PT-X							GWB	PT-C	8'-0"	-
226	STAIR #2	CONC	-	VINYL	BS-3	GWB	PT-X							GWB	PT-C	-	-
227	ELEV. MACH. ROOM	CONC	-	CONC	-	GWB	PT-F	CMU	PT-F	GWB	PT-F	GWB	PT-F	GWB	PT-C	8'-0"	-
229	ELEVATOR	CONC	-	-	-	CMU	PT-H							OPEN TO DECK	PT-C	-	-
230	MEAT FREEZER	EPOXY	EP-1	EPOXY	BS-1	COOLER	-	COOLER	-	COOLER	-	COOLER	-	COOLER CEILING	-	9'-0"	-
231	GROCERY FREEZER	EPOXY	EP-1	EPOXY	BS-1	COOLER	-	COOLER	-	COOLER	-	COOLER	-	COOLER CEILING	-	9'-0"	-
						NORTH WALL		EAST WALL		SOUTH WALL		WEST WALL					

FINISH MATERIAL SCHEDULE

ITEM	SYM	MFR.	DESCRIPTION	NO.	COLOR	FINISH	REMARKS
FLOOR TILE							
FLOOR TILE	FT-1	MCINTYRE	12"X12" TERRA PAVER	GM75	LAVA GREY		
FLOOR STAIN							
SEALER	FS-1	CURECRETE CHEMICALS	SEALED CONCRETE ASHFORD FORMULA				
EPOXY FLOORS							
EPOXY	EP-1	DEGUSSA	SRS DEGADUR	-	AS SELECTED BY OWNER		ACRYLIC SELF-LEVELING QUARTZ BROADCAST FLR. COATING
EPOXY	EP-2	DEGUSSA	SRS DEGADUR	-	AS SELECTED BY OWNER		ACRYLIC SELF-LEVELING QUARTZ BROADCAST FLR. COATING
BASE							
BASE	BS-1	DEGADUR	SRS DEGADUR	-	AS SELECTED BY OWNER		SEE DETAIL #3/A8.02
BASE	BS-2	DEGADUR	SRS DEGADUR	-	AS SELECTED BY OWNER		SEE DETAIL #3/A8.02
BASE	BS-3	ROPPE	4" RUBBER COVE BASE	193	BLACK / BROWN		
BASE	BS-4	-	5/4" MAPLE	-	CLEAR SEALED		
WALL TILE							
WALL TILE	WT-1	MCINTYRE	6"X6"		SPEARMINT		
WALL TILE	WT-2	MCINTYRE	6"X12"		SPEARMINT		
WALL TILE	WT-3	MCINTYRE	6"X6"		MOJAVE		
WALL TILE	WT-4	MCINTYRE	6"X12"		MOJAVE		
WALL TILE	WT-5	MCINTYRE	6"X6"		SEQUOIA		
WALL TILE	WT-6	MCINTYRE	6"X12"		SEQUOIA		
WALL TILE	WT-7	MCINTYRE	6"X6"		CHEROKEE		
WALL TILE	WT-8	MCINTYRE	6"X12"		CHEROKEE		
WALL TILE	WT-9	MCINTYRE	6"X6"		ELK		
WALL TILE	WT-10	MCINTYRE	6"X6"		SAFRON		
WALL TILE	WT-11	MCINTYRE	6"X12"		SAFRON		
WALL TILE	WT-12	MCINTYRE	4"X8"		IRON 6		
WALL TILE	WT-13	AMERICAN OLEAN	6"X12"		MARTINIQUE MTII BISCUIT		
WALL TILE	WT-14	MCINTYRE	3"X6"		ELK		
PAINT							
PAINT	PT-A	SHERWIN WILLIAMS		0040	ADOBE		
PAINT	PT-B	SHERWIN WILLIAMS		279	HOLLYWOOD GOLD		
PAINT	PT-C	SHERWIN WILLIAMS	M.S. COLLECTION	8143	TATAMI		
PAINT	PT-D	BENJAMIN MOORE		684	SHENDOAH		
PAINT	PT-E	SHERWIN WILLIAMS	M.S. COLLECTION	8220	FISHING FLOAT		
PAINT	PT-F	BENJAMIN MOORE		383	MEADOW VIEW		
PAINT	PT-G	SHERWIN WILLIAMS	M.S. COLLECTION	8391	CAPER BERRY		
PAINT	PT-H	-	CMU SEALER	-	TRANSPARENT		
PAINT	PT-X	SHERWIN WILLIAMS	-	-	AS SELECTED BY OWNER		
PLASTIC LAMINATES							
WALL COVERINGS							
MAPLE WAINSCOT	WC-A		MAPLE VENEER PLYWOOD		-	CLEAR SEALED	
ACROVYN	WC-B		ACROVYN		-	-	
FRP	WC-C	KALWALL	KAL-LITE 2000		WHITE	PEBBLED	
STAINLESS STL.	WC-D	-	STA. STL. COLUMN WRAP		-	-	
STAINLESS STL.	WC-E	-	S.S. SHEET PANEL		-	-	
PLYWOOD	WC-F	-	PLYWOOD		-	-	TO 4'-0" A.F.F.
PLYWOOD	WC-G	-	PLYWOOD		-	-	TO 8'-0" A.F.F.
CEILING TILE							
CEILING TILE	ACT-1	ARMSTRONG	CORTEGA TEGULAR (2x2)	704	WHITE	WHITE "T" GRID	
CEILING TILE	ACT-2	ARMSTRONG	CLEAN ROOM VL (2x2)	868	WHITE	WHITE "T" GRID	
CEILING TILE	ACT-3	ARMSTRONG	CORTEGA TEGULAR (2x4)	703	WHITE	WHITE "T" GRID	
CEILING TILE	ACT-2	ARMSTRONG	CLEAN ROOM VL (2x4)	870	WHITE	WHITE "T" GRID	
WOOD TILE	WDC-1		1x CEDAR STRIP			CLEAR SEALED	
WOOD TILE	WDT-1						
GROUT							
GROUT	G-1	LATICRETE		85	ALMOND		
GROUT	G-2	LATICRETE		44	BRIGHT WHITE		
GROUT	G-3	LATICRETE		45	RAVEN		
EXTERIOR							
CEMENT PANEL	-						
CEMENT PANEL	-						
BRICK	-						
BLUESTONE	-						
METALS							
STAINLESS STEEL	SS-1						FULL HEIGHT WHERE INDICATED IN PREP AREAS

NOTES

1. ALL CEILING, STRUCTURE, AND COLUMNS ON SALES FLOOR TO BE PAINTED (PT-C) UNLESS OTHERWISE NOTED.
2. H.M. DOOR FRAMES TO BE PAINTED (PT-G).
3. BACK OF HOUSE METAL HAND/GURADRAILS STRINGERS/RISERS (TOP & BOTTOM) (PT-G).
4. CMU AND GWB WALLS AT BACK OF HOUSE TO BE PAINTED (PT-C) (UNLESS OTHERWISE NOTED).

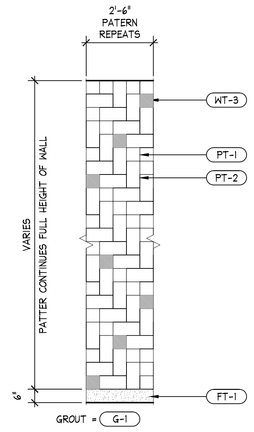

1 TILE PATTERN 1 — 3/8" = 1'-0"

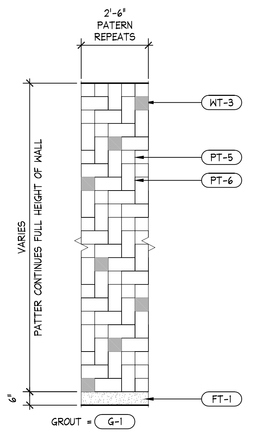

2 TILE PATTERN 2 — 3/8" = 1'-0"

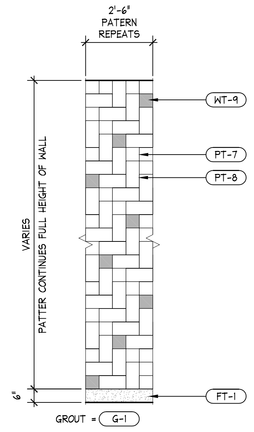

3 TILE PATTERN 3 — 3/8" = 1'-0"

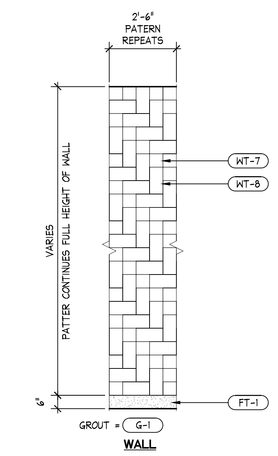

4 TILE PATTERN 3A — 3/8" = 1'-0"

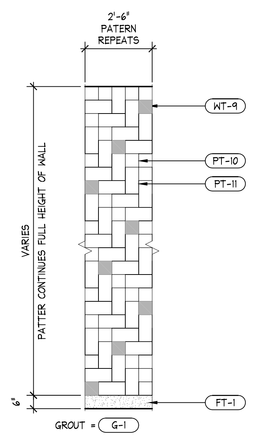

5 TILE PATTERN 4 — 3/8" = 1'-0"

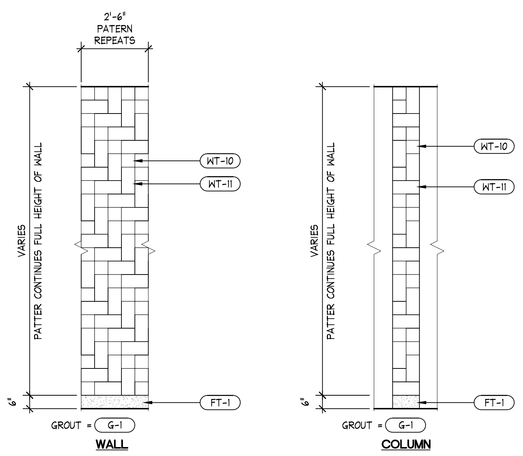

6 TILE PATTERN 4A — 3/8" = 1'-0"



7 TILE PATTERN 5 — 3/8" = 1'-0"



8 TILE PATTERN 6 — 3/8" = 1'-0"



9 TILE PATTERN 7 — 3/8" = 1'-0"

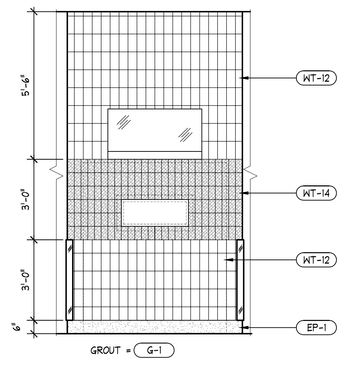

10 TILE PATTERN 8 — 3/8" = 1'-0"

BL Companies
ARCHITECTURE
ENGINEERING
PLANNING
LANDSCAPE ARCHITECTURE
LAND SURVEYING
ENVIRONMENTAL SCIENCES
ANALYTICAL SERVICES

355 Research Parkway
Meriden, CT 06450
(203) 630-1406
(203) 630-2615 Fax

WHOLE FOODS MARKET

ISSUED FOR CONSTRUCTION

PROPOSED GROCERY STORE
2 SOMERSET STREET
PORTLAND, CUMBERLAND COUNTY, MAINE

No. Date Desc.

REVISIONS
No. Date Desc.

ARCHITECT/ENGINEER SEAL

Designed
Drawn BL
Checked BL
Approved
Scale AS NOTED
Project No. 04C0829
Date 04-24-06
CAD File

Title
FINISH SCHEDULES AND DETAILS

Sheet No.
A7.01

C:\Jobs\04C0829\Arch\A04C0829f01.dwg Apr 26, 2006 - 11:38 AM

THESE DRAWINGS SHALL NOT BE UTILIZED BY ANY PERSON, FIRM OR CORPORATION WITHOUT THE SPECIFIC WRITTEN PERMISSION OF BL COMPANIES