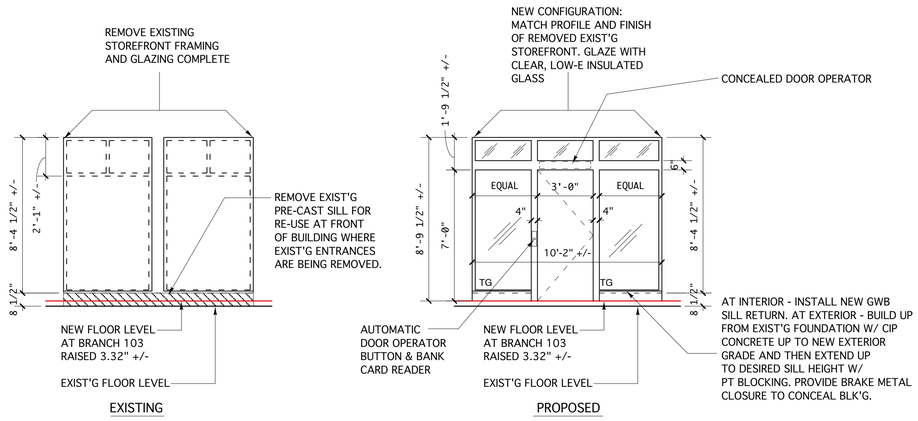

3 INTERIOR ELEVATION OF NEW ENTRANCE STOREFRONT IN EXISTING OPENING

scale: 1/4" = 1'-0" BRANCH SPACE 103

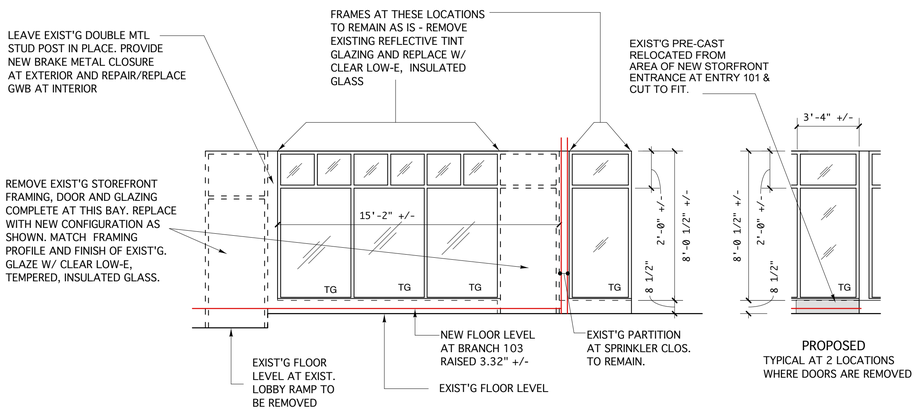

2 INTERIOR ELEVATION OF EXIST'G STOREFRONT

scale: 1/4" = 1'-0" BRANCH SPACE 103

CONTRACTOR NOTE: EXISTING STOREFRONT CONSISTS OF CLEAR ANODIZED ALUMINUM FRAMING THAT HAS BEEN PAINTED AT THE EXTERIOR TO MATCH DARK BRONZE ANODIZED ALUMINUM. NEW FRAMING COMPONENTS REQUIRED AT MODIFIED PORTIONS OF EXISTING FRAMING SHALL EITHER CONSIST OF A SPLIT FRAME SYSTEM WITH THE EXTERIOR FINISH BEING DARK ANODIZED AND THE INTERIOR FINISH BEING CLEAR ANODIZED OR, IF A SPLIT FRAME SYSTEM IS NOT AVAILABLE, PROVIDE CLEAR ANODIZED FRAMING FINISH AND INCLUDE PAINTING THE EXTERIOR WITH A HIGH PERFORMANCE URETHANE COATING TO MATCH THE EXISTING FINISH.

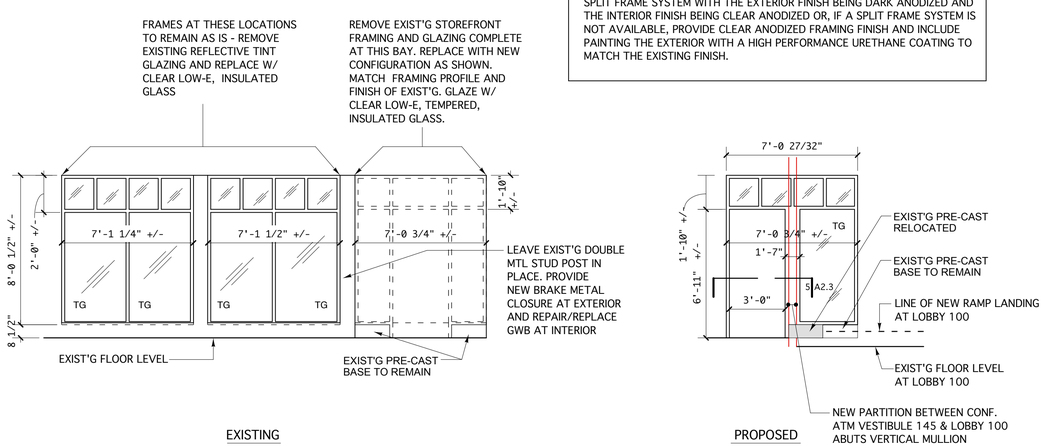

1 INTERIOR ELEVATION OF EXIST'G STOREFRONT

scale: 1/4" = 1'-0" CONFERENCE RM 143

DOOR & FRAME SCHEDULE

Door Location		General			Door			Frame			Details				Hinges	Closer	Cylindrical Lockset w/ Lever Handle	Push/Pull	Exit Device	Lock Cylinder	Kick Plate	Perimeter Sound Gasketing	Weatherstripping & Storm Gasketing	Silencers	Stop	Card Reader	Door Position Switch	Elec. Strike	Automatic Door Operator	Electro-Magnetic Hold Open tied to fire alarm	Notes
Rm. No.	Room. Name	Door No.	Size (W x H)	Thickness	Material	Finish	Type	Material	Finish	Type	Head	Jamb	Threshold	Label																	
100	Existing Lobby	100	3'-0" X 7'-0"	1 3/4"	SCWD	Clr. F.	A	HM	PTD	F4	H1 sim.	J1 sim.	--	--	●	●		●		●					●	●	●	●			NEW FRAME IN EXIST'G WALL-VERIFY THROAT
100	Existing Lobby	100.1	PR. 3'-0" X 7'-0"	1 3/4"	SCWD	PTD	B	HM	PTD	F6	H1	J6	--	60 MIN	●	●	PASS		●						●						●	VERTICAL ROD EXIT DEVICE
100	Existing Lobby	100.2	3'-0" X 7'-0"	1 3/4"	SCWD	Clr. F.	B	HM	PTD	F1	H1	J1	--	60 MIN	●	●	PASS								●						●	
102	Sprinkler Service Closet	102	3'-0" X 7'-0" *	1 3/4"	HM	PTD	B	HM	PTD	F1	H1	J1	T2	--	●		STOR			●					●	●		●				NEW DR & FRAME @ MODIFIED EXIST'G OPNG
103	Bank Branch Entry	101	3'-0" X 7'-0"	1 3/4"	AL	CLR ANOD	A	AL	CLR ANOD	3/A2.2	H4	J4	T	--	●	●	ENTR	●	●	●			●			●	●	●	●	●		CONCEALED OPERATOR SEE DETAILS
104	CSR Office	104	3'-0" X 7'-0"	1 3/4"	SCWD	Clr. F.	A	HM	PTD	F8	H1	J1	T3	--	●		OFFICE			●					●	●						
105	Bank Branch	105	3'-0" X 7'-0"	1 3/4"	SCWD	Clr. F.	A	HM	PTD	F2	H1	J1	--	--	●	●	OFFICE			●					●	●	●	●	●			
106	Cash Room	106	3'-0" X 7'-0"	1 3/4"	SCWD	Clr. F.	B	HM	PTD	F1	H3	J3	--	--	●	●	STOR			●					●	●	●	●	●			
107	Manager Office	107	←	GLASS DOOR IN DEMOUNTABLE GLASS PARTITION -DTLS. PER MANUFACTURER →																●											ALL OTHER HARDWARE BY PARTITION SUPPLIER
108	Informal Meeting Room	108	←	GLASS DOOR IN DEMOUNTABLE GLASS PARTITION -DTLS. PER MANUFACTURER →																●											ALL OTHER HARDWARE BY PARTITION SUPPLIER
109	Reception	109	3'-0" X 7'-0"	1 3/4"	SCWD	Clr. F.	A	HM	PTD	F3	H1	J1	--	--	●	●	OFFICE			●					●	●	●	●	●			
109	Reception	109.1	3'-0" X 7'-0"	1 3/4"	SCWD	Clr. F.	A	HM	PTD	F3	H1	J1	T3	--	●	●	OFFICE			●					●	●	●	●	●			
110	Server Room	110	3'-0" X 7'-0"	1 3/4"	SCWD	Clr. F.	B	HM	PTD	F1	H1	J1	--	--	●	●	STOR			●					●	●	●	●	●			
112	SBA Sales Mgr. Office	112	←	GLASS DOOR IN DEMOUNTABLE GLASS PARTITION -DTLS. PER MANUFACTURER →																●											ALL OTHER HARDWARE BY PARTITION SUPPLIER
113	CB President Office	113	←	GLASS DOOR IN DEMOUNTABLE GLASS PARTITION -DTLS. PER MANUFACTURER →																●											ALL OTHER HARDWARE BY PARTITION SUPPLIER
114	Retail Sales/Ops. Mgr. Office	114	←	GLASS DOOR IN DEMOUNTABLE GLASS PARTITION -DTLS. PER MANUFACTURER →																●											ALL OTHER HARDWARE BY PARTITION SUPPLIER
115	Chief Commercial Lender Office	115	←	GLASS DOOR IN DEMOUNTABLE GLASS PARTITION -DTLS. PER MANUFACTURER →																●											ALL OTHER HARDWARE BY PARTITION SUPPLIER
116	Tel/Data Closet	116	3'-0" X 7'-0"	1 3/4"	SCWD	Clr. F.	B	HM	PTD	F1	H1	J1	T2	--	●	●	STOR			●					●	●		●				
117	Open Office Area	117	3'-0" X 7'-0" *	1 3/4"	SCWD	Clr. F.	B	HM	PTD	F1	H1 Sim	J1 Sim	T	90 MIN	●	●	ENTR			●			●	●	●	●	●	●	●			NEW DR & FRAME @ EXIST'G OPNG-VERIFY THROAT
120	Secure File Room	120	3'-0" X 7'-0"	1 3/4"	SCWD	Clr. F.	B	HM	PTD	F1	H1	J1	T1	--	●	●	STOR			●					●	●	●	●	●			
121	Commercial Lender 1 Office	121	←	GLASS DOOR IN DEMOUNTABLE GLASS PARTITION -DTLS. PER MANUFACTURER →																●											ALL OTHER HARDWARE BY PARTITION SUPPLIER
122	Mother Room	122	3'-0" X 7'-0"	1 3/4"	SCWD	Clr. F.	B	HM	PTD	F1	H1	J1	T1	--	●		PRVCY			●		●		●	●		●				PRIVACY FUNCTION W/ THUMB LATCH
123	Storage Room	123	2'-8" X 7'-0"	1 3/4"	SCWD	Clr. F.	B	HM	PTD	F1	H1	J1	T4	--	●		STOR			●	●				●	●		●				
124	Electrical Room	124	3'-0" X 7'-0" *	1 3/4"	HM	PTD.	B	EXIST	PTD	EXIST	--	--	T5	--	●		STOR			●					●	●		●				NEW DOOR IN EXIST. FRAME. VERIFY SIZE
126	Commercial Lender 2 Office	126	←	GLASS DOOR IN DEMOUNTABLE GLASS PARTITION -DTLS. PER MANUFACTURER →																●											ALL OTHER HARDWARE BY PARTITION SUPPLIER
127	Human Resources Office	127	←	GLASS DOOR IN DEMOUNTABLE GLASS PARTITION -DTLS. PER MANUFACTURER →																●											ALL OTHER HARDWARE BY PARTITION SUPPLIER
129	Toilet Room	129	3'-0" X 7'-0"	1 3/4"	SCWD	Clr. F.	B	HM	PTD	F1	H1	J1	--	--	●		PRVCY			●		●		●	●						PRIVACY FUNCTION W/ THUMB LATCH
130	Closet	130	3'-0" X 7'-0"	1 3/4"	SCWD	Clr. F.	B	HM	PTD	F1	H1	J1	T1	--	●		PASS								●	●						
133	Closet	133	PR 3'-0" X 7'-0"	1 3/4"	SCWD	Clr. F.	B	HM	PTD	F6	H1	J1	T1	--	●		--								●	●						DUMMY LEVER/ MAGNETIC CATCH
134	Small Conference Room	134	3'-0" X 7'-0"	1 3/4"	SCWD	Clr. F.	A	HM	PTD	F5	H3	J3	--	--			OFFICE															
135	Men's Toilet Room	135	3'-0" X 7'-0"	1 3/4"	SCWD	Clr. F.	B	HM	PTD	F1	H1	J1	T3	--	●	●	--	●				●		●	●							
136	Women's Toilet Room	136	3'-0" X 7'-0"	1 3/4"	SCWD	Clr. F.	B	HM	PTD	F1	H1	J1	T3	--	●	●	--	●				●		●	●							
137	Mortgage Lender 2 Office	137	←	GLASS DOOR IN DEMOUNTABLE GLASS PARTITION -DTLS. PER MANUFACTURER →																●											ALL OTHER HARDWARE BY PARTITION SUPPLIER
138	Mortgage Lender 1 Office	138	←	GLASS DOOR IN DEMOUNTABLE GLASS PARTITION -DTLS. PER MANUFACTURER →																●											ALL OTHER HARDWARE BY PARTITION SUPPLIER
139	Swing Space 1 Office	139	←	GLASS DOOR IN DEMOUNTABLE GLASS PARTITION -DTLS. PER MANUFACTURER →																●											ALL OTHER HARDWARE BY PARTITION SUPPLIER
140	Swing Space 2 Office	140	←	GLASS DOOR IN DEMOUNTABLE GLASS PARTITION -DTLS. PER MANUFACTURER →																●											ALL OTHER HARDWARE BY PARTITION SUPPLIER
141	Swing Space 3 Office	141	←	GLASS DOOR IN DEMOUNTABLE GLASS PARTITION -DTLS. PER MANUFACTURER →																●											ALL OTHER HARDWARE BY PARTITION SUPPLIER
142	Conference Room	142	3'-0" X 7'-0"	1 3/4"	SCWD	Clr. F.	A	HM	PTD	F1	H3	J3	--	--	●		OFF			●		●		●	●						
143	Conference Room	143	3'-0" X 7'-0"	1 3/4"	SCWD	Clr. F.	A	HM	PTD	F1	H3	J3	--	--	●		OFF			●		●		●	●						
144	A/V Closet	144	PR 2'-0" X 7'-0"	1 3/4"	SCWD	Clr. F.	B	HM	PTD	F6	H1	J1	T1	--	●		STOR			●					●	●						
145	ATM Closet	145	3'-0" X 7'-0"	1 3/4"	SCWD	Clr. F.	B	HM	PTD	F1	H2	J2	T1	--	●		STOR			●					●	●		●	●			
146	ATM Vestibule	146	3'-0" X 7'-0" *	1 3/4"	AL	CLR ANOD	A	AL	CLR ANOD	1/A2.2	H5	J5	T	--	●	●	ENTR	●	●	●			●		●	●	●	●	●		BANK CARD READER/ EXTERIOR PULL /VERIFY DOOR HT./ SURFACE MNTD OPERATOR

ABBREVIATIONS

SCWD	Solid Core wood door
Clr. F.	Clear Finish
CLR ANOD	Clear Anodized Finish
HM	Hollow Metall
AL	Aluminum
PTD.	Painted
HW	Hardware Set
TG	Tempered Glass



DOOR TYPES

1/4" = 1'-0"

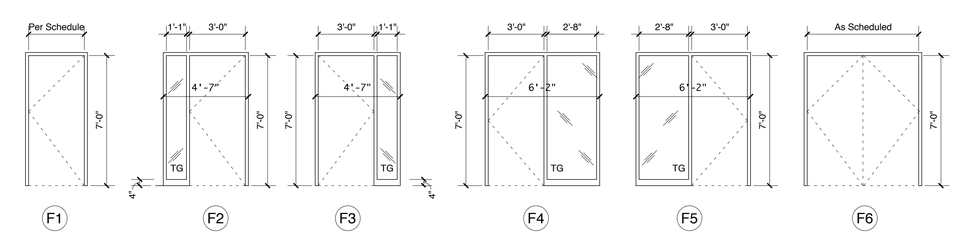

FRAME TYPES

1/4" = 1'-0"

1. HM Frame Face Width 2", typ. unless noted otherwise
2. Aluminum Frame Face Width 2", typ. unless noted otherwise

WSA
WINTON SCOTT ARCHITECTS
5 Milk Street
Portland, Maine 04101
207 774 4811
www.wintonscott.com

LICENSED ARCHITECT STEPHEN W. WEATHERHEAD No. 1948 STATE OF MAINE

Branding / Bank Branch Interior Design:
THE ELEMENT GROUP
125 Brewery Lane
Suite #9
Portsmouth, NH 03801
T. 603.319.8951

Structural Engineering:
STRUCTURAL INTEGRITY ENGINEERS
77 Oak Street
Portland, ME 04101
T. 207.774.4614

HVAC & plumbing Engineering:
MECHANICAL SYSTEMS ENGINEERS
Royal River Center, Unit 10
10 Forest Falls Drive
Yarmouth, ME 04096
T. 207.846.1441

Electrical Engineering:
SWIFT CURRENT ENGINEERING
Royal River Center, Unit 4B
10 Forest Falls Drive
Yarmouth, ME 04096
T. 207.847.9280

Northeast BANK

Portland Branch
27 Pearl Street
1st Floor Tenant Space
Portland, Maine

FINAL CONSTRUCTION SET
MARCH 4, 2015

DOOR SCHEDULE/ DETAILS & STOREFRONT

Scale: As Noted

A2.2