DOOR AND FRAME SCHEDULE

AREA	No.	DOOR SIZE W	SIZE H	SIZE T	MAT	TYPE	GLASS	LOUVER W	LOUVER H	FRAME MAT	TYPE	DETAILS HEAD	DETAILS JAMB	DETAILS SILL	FIRE RATING	HDW SET	REMARKS
	202	2–3'–0"	7'–0"	1 3/4"	WD	F	–	–	–	HM	1	B1	C1				
	203	2–3'–0"	7'–0"	1 3/4"	WD	G	–	–	–	HM	1	B1	C1				
	203A	EXISTING TO REMAIN															
	204	3'–0"	7'–0"	1 3/4"	WD	F	–	–	–	HM	1	B1	C1				
	205	EXISTING TO REMAIN															
	206	EXISTING TO REMAIN															
	207	EXISTING TO REMAIN															
	209	EXISTING TO REMAIN															
	210	EXISTING TO REMAIN															
	211	EXISTING TO REMAIN															
	212	EXISTING TO REMAIN															
	213	EXISTING TO REMAIN															
	214	EXISTING TO REMAIN															
	215	EXISTING TO REMAIN															
	216	EXISTING TO REMAIN															
	218	EXISTING TO REMAIN															
	219	EXISTING TO REMAIN															
	220	3'–0"	7'–0"	1 3/4"	WD	F	–	–	–	HM	2	B1	C1				
	222	3'–0"	7'–0"	1 3/4"	WD	F	–	–	–	HM	1	B1	C1				
	223	3'–0"	7'–0"	1 3/4"	WD	F	–	–	–	HM	1	B1	C1				CARD READER/ELEC STRIKE (SEE NOTES)
	227	2'–0"	6'–8"	1 3/4"	WD	F	–	–	–	HM	1	B1	C1				
	228	3'–0"	7'–0"	1 3/4"	WD	F	–	–	–	HM	1	B1	C1				CARD READER/ELEC STRIKE (SEE NOTES)
	229	2'–6"	7'–0"	1 3/4"	WD	N	–	–	–	HM	1	B1	C1				METAL THRESHOLD CARD READER/ELEC STRIKE (SEE NOTES)
	229A	2–3'–0"	7'–0"	1 3/4"	WD	N	–	–	–	HM	1	B1	C1				METAL THRESHOLD HARDWARE ROOM SIDE ONLY
	230	3'–0"	7'–0"	1 3/4"	WD	F	–	–	–	HM	1	B1	C1				
	231	EXISTING TO REMAIN															
	232	EXISTING TO REMAIN															
	233	EXISTING TO REMAIN															
	601	3'–0"	7'–0"	1 3/4"	WD	F	–	–	–	HM	1	B1	C1				

NOTES:
REUSE REMOVED EXISTING DOORS WHERE POSSIBLE IN LOCATIONS SHOWN AS NEW. REUSE DOORS THAT ARE IN GOOD CONDITION (WITH CORRECT HANDING) OR AS DIRECTED BY OWNER.

PREP DOOR FRAMES FOR VON DUPRIN STRIKE FORCE 6211/6211DS ELECTRIC STRIKE AT CARD READER LOCATIONS.

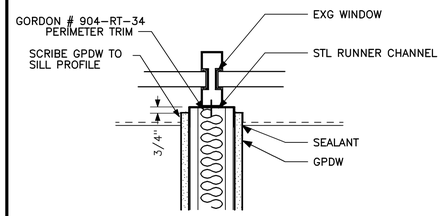

PARTITION/MULLION DETAIL — C2
1 1/2" = 1'–0" | 0 4" 8" 1' | REF: A10.2



HEAD DETAIL — C1
1 1/2" = 1'–0" | 0 4" 8" 1' | REF: A60.1

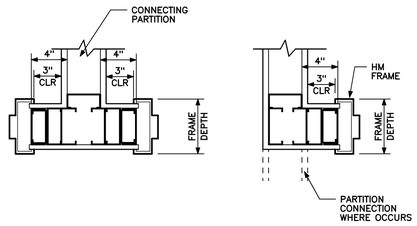

STANDARD DOOR FRAME LOCATION DETAIL — B2
1 1/2" = 1'–0" | | REF: NA



JAMB DETAIL — B1
1 1/2" = 1'–0" | 0 4" 8" 1' | REF: A60.1

GENERAL NOTES:
1.) FRAME HEADS SHALL BE 2" UNLESS NOTED OTHERWISE
2.) JAMBS AND MULLIONS SHALL BE 2" UNLESS NOTED OTHERWISE
3.) BASES OF SIDELITES SHALL BE 6" UNLESS NOTED OTHERWISE



FRAME TYPES — A2
1/4" = 1'–0" | 0 2' 4' 6' | REF: A60.1

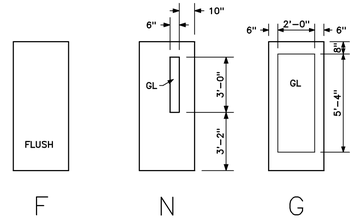

DOOR TYPES — A1
1/4" = 1'–0" | 0 2' 4' 6' | REF: NA

Architects + Engineers
HARRIMAN ASSOCIATES
66 Pearl Street, Suite 301
Portland, Maine 04101
207.775.0053 tel
207.775.0460 fax
www.harriman.com
Building communities since 1870

© 2004

Project Title
MEMIC COMPUTER ROOM RELOCATION
PORTLAND, MAINE

HA Project No. 04150

Key Plan

Mark	Date	Description
–	11–03–04	ISSUED FOR CONSTRUCTION
–	10–19–04	90% REVIEW
–	10–01–04	DD REVIEW

Issue Dates

Drawing Status

Drawing Title
DOOR SCHEDULE

PA / PE: PSC | Drawn By: MED

Drawing Number
A60.1

PLOT DATE: Wed 11/3/2004 - 11:25:39 for /data/projects/04150/dgn/a_sch.dgn by medes