General Notes:

1. EXISTING TEMPORARY COLUMN TO BE REMOVED AFTER PERMANENT COLUMN @ D.7–13.5 HAS BEEN INSTALLED.
2. DEPTH OF NEW FOOTINGS TO BE COORDINATED WITH AS–BUILT CONDITIONS OF UNDERGROUND UTILITIES. ALL FOUNDATION CHANGES MUST BE APPROVED BY SER.
3. EXTEND STRONG BANDS OVER FULL WIDTH OF ADJACENT EXISTING CONCRETE JOISTS IN ELECTRICAL VAULT BELOW. FIELD VERIFY LOCATION OF ADJACENT JOISTS.
4. NEW SLAB–ON–GRADE WITH HAUNCHED EDGE UNDER VALET BOOTH. SEE ARCH. DRAWINGS FOR SIZE, LOCATION AND SLAB TOC ELEVATION. SEE MECH./CIVIL DRAWINGS FOR CONDUIT UNDER/THROUGH SLAB. ADD (2) 1" LAYERS OF RIGID INSULATION WITH STAGGERED SEAMS UNDER SLAB. EXTEND 4'–0" MIN. BEYOND EDGES OF SLAB
5. PRIOR TO REMOVING (E) HSS POST. ADD 3/4"x16"x1'–4" END PLATE TO (E) W14 BEAM BEARING ON (E) POST. ADD 3/4"x16"x1'–0" SIDE PLATES TO EACH FLANGE OF (E) W14 COLUMN. WELD ALL (N) PLATES TO (E) STEEL WITH 5/16" FILLET WELDS ALL AROUND. ONCE WELDS ARE COMPLETE UNBOLT AND REMOVE HSS POST.

LEGEND GRID LINES:

- F.5 — EXISTING ED EXPANSION (1997)
- A — EXISTING RICHARDS BUILDING (1966)
- 11 — EXISTING BEAN BUILDING (1983)
- A — EXISTING PEDESTRIAN FOOT BRIDGE & LOBBY CONNECTORS
- C — EXISTING PRECAST PARKING GARAGE

ALTERNATE #7: ADD DIRECT ADMIT CANOPY

EXISTING 1997 ED EXPANSION

EXISTING 1966 RICHARDS BUILDING

EXISTING 1983 BEAN BUILDING

CRESCENT STREET

1 S400 BASEMENT LEVEL FOUNDATION PLAN
1/8" = 1'–0"


SIMPSON GUMPERTZ & HEGER
Engineering of Structures and Building Enclosures

Simpson Gumpertz & Heger Inc.
41 Seyon Street, Building 1, Suite 500
Waltham, Massachusetts 02453
main 781.907.9000 fax 781.907.9009
www.sgh.com

Boston
Los Angeles
New York
San Francisco
Washington, DC


| MARK | ISSUE DATE | DESCRIPTION |
|---|---|---|
| BID | 12/14/07 | BID SET |

Issue Log

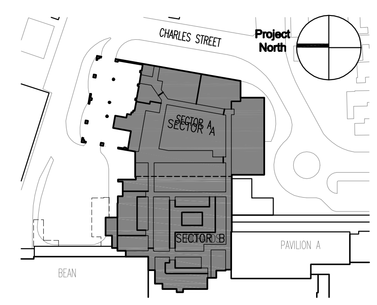


Key Plan


TRO Jung|Brannen
ARCHITECTURE INTERIOR DESIGN ENGINEERING MASTER PLANNING
22 Boston Wharf Road, Boston, Massachusetts 02210
Tel 617.502.9400 Fax 617.502.3402 www.trojungbrannen.com


Maine Medical Center
ED Expansion and Renovation
Portland, Maine MMC Project No. 21843

Drawing Title
**EMERGENCY DEPARTMENT BASEMENT LEVEL FOUNDATION PLAN**

| | | | |
|---|---|---|---|
| Drawn By | MJB | Commission No. | 4696 |
| Approved By | JHT | Date Issued | 12/14/07 |

| Phase / Package Number | Sheet Number |
|---|---|
| | **S201B** |

Copyright © 2007 TRO Jung|Brannen