GENERAL NOTES

1. All work shall be in accordance with the State Plumbing Code, local codes and ordinances, National Fire Code (NFPA), or these plans or specifications, whichever is more strict.

2. All drawings are schematic only, and are intended to indicate the intent, extent, and general arrangement of work. They are not meant to show every fitting, change of direction or every situation. Verify locations in the field. Work indicated shall be furnished complete to perform the function intended.

3. Carefully coordinate the space requirements and location of piping with the other trade contractors.

4. All piping shall run concealed above ceilings, in walls, in soffits and in chases unless noted otherwise.

5. No structural members shall be cut without approval of the Architect.

6. All domestic water piping shall be insulated, except where indicated otherwise..

PLUMBING FIXTURE SCHEDULE

TAG	FIXTURE	COLD WATER	120° WATER	SAN/ WASTE	VENT	REMARKS
LV-1	LAVATORY, UNDERMOUNT - ADA	1/2"	1/2"	1-½" TO 2"	1-½"	COUNTER MOUNTED AT 34"
SK-1	SINK, UNDERMOUNT, SINGLE BOWL - ADA	1/2"	1/2"	1-½" TO 2"	1-½"	COUNTER MOUNTED AT 34"

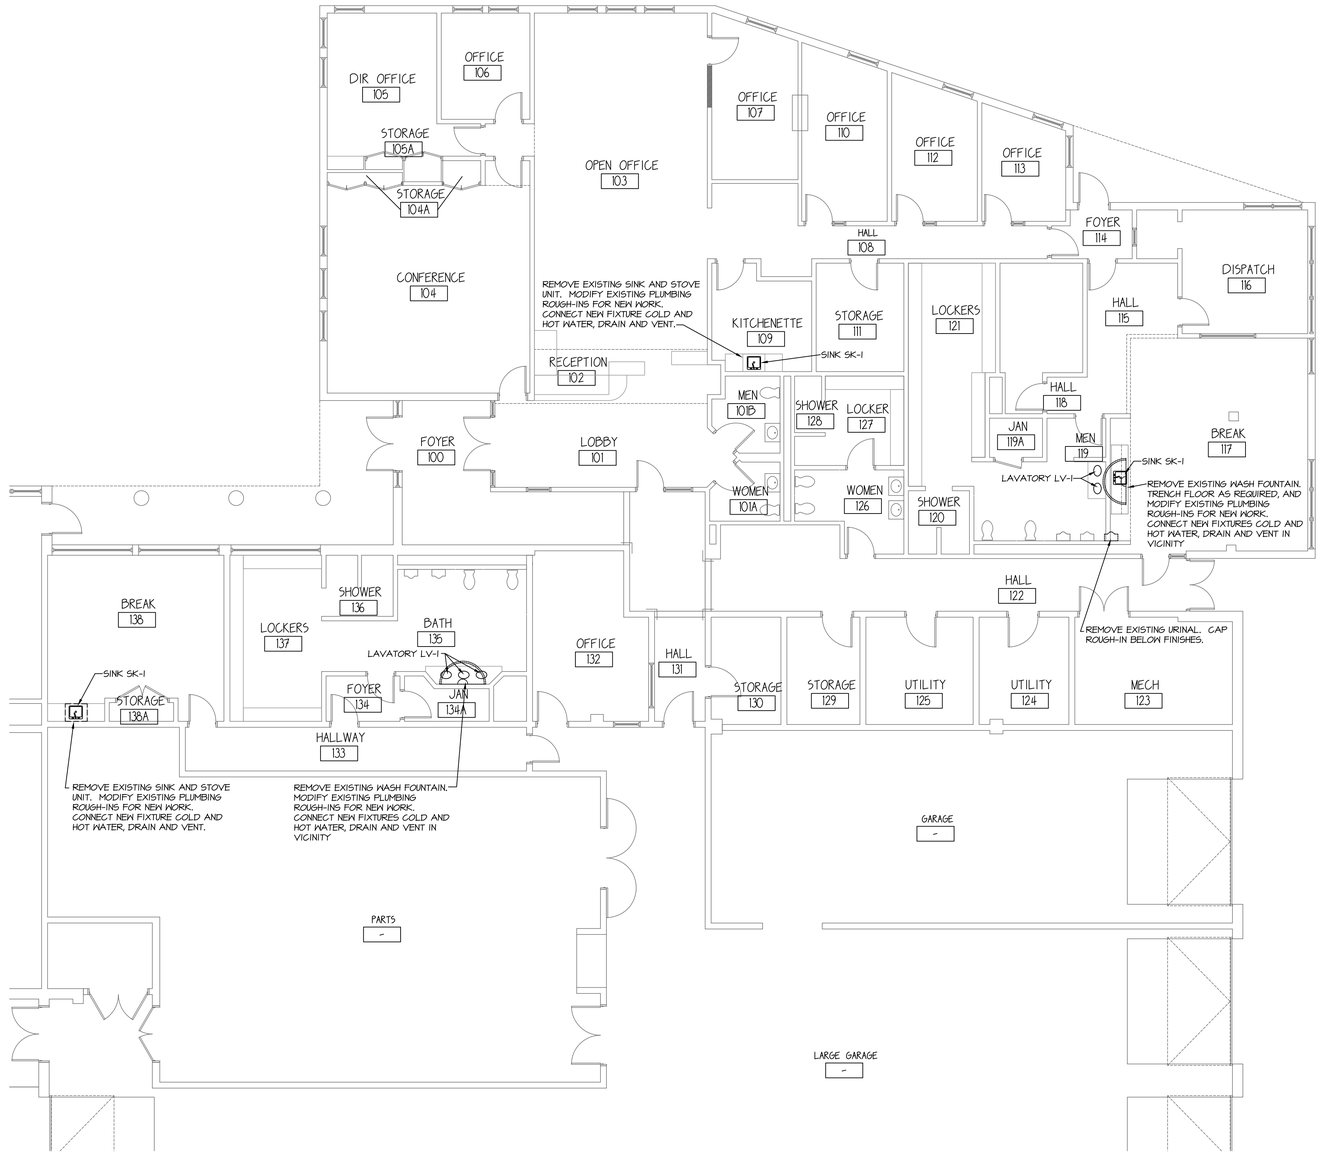

¼" = 1'-0"

PORT ▪ CITY ARCHITECTURE
65 NEWBURY STREET
PORTLAND, ME 04101
207.761.9000
info@portcityarch.com
WWW.PORTCITYARCH.COM

STATE OF MAINE · Kurt F. Magnusson 10257 · LICENSED · PROFESSIONAL ENGINEER

CONSULTANTS

Mechanical Systems Engineers
10 Forest Fall Drive - suite 10B
Yarmouth, Maine 04096
(207) 846-9441
contact: Kurt Magnusson, P.E.
kurt@mechanicalsystemseng.com

Swiftcurrent Engineering Services Inc.
10 Forest Fall Drive - unit 4B
Yarmouth, Maine 04096
(207) 847-9280
contact: Tim Matthews, P.E.
tim@swiftcurrenteng.com

REVISIONS

No.	Date	Description

FOR BID

GREATER PORTLAND METRO
SOUTH PORTLAND, MAINE
OFFICE RENOVATIONS

Sheet Name
PLUMBING FLOOR PLAN

Project Number	16403
Date	October 7, 2016
Drawn by	EJP
Checked by	KFM

P1.1

Scale ¼" = 1'-0"

COPYRIGHT: Reuse or reproduction of the contents of this document is not permitted without written permission of PORT CITY ARCHITECTURE PA