


NOTE: SEE SECTION 01500, 1.28 FOR ADDITIONAL INFORMATION.

5 PROJECT SIGN
1/2" = 1'-0"




6 STOCKADE FENCE
1/2" = 1'-0"

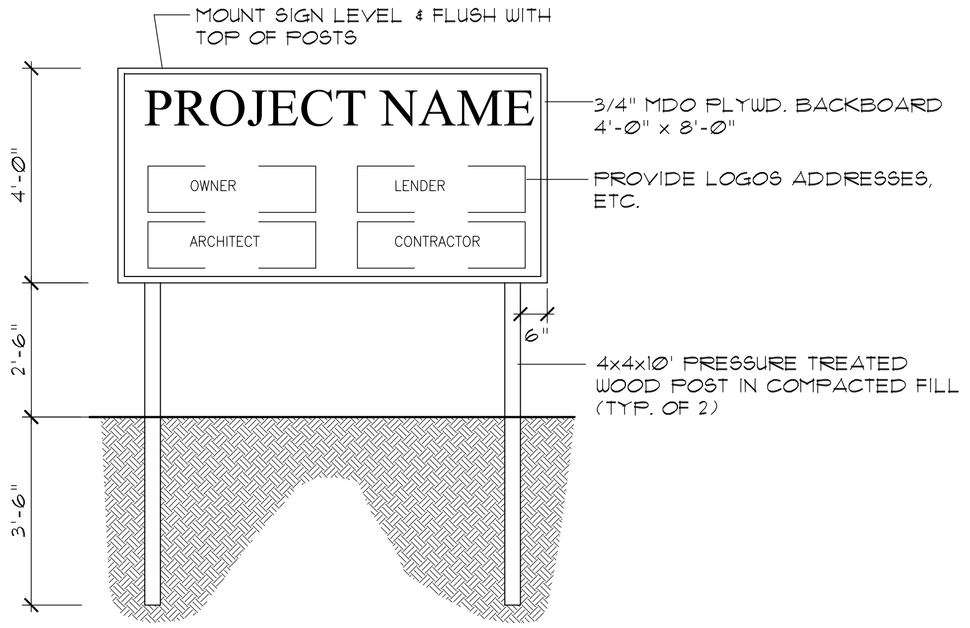


4 THIRD FLOOR LIGHTING PLAN
1/4" = 1'-0"

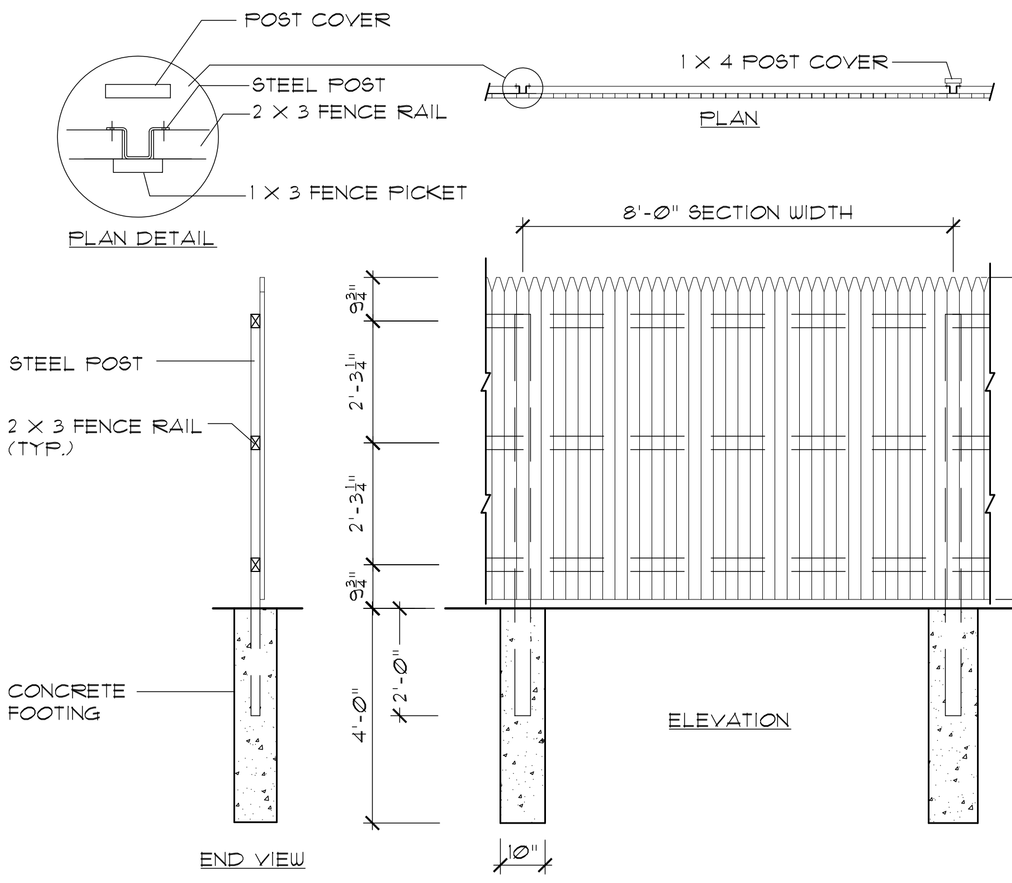


3 SECOND FLOOR LIGHTING PLAN
1/8" = 1'-0"

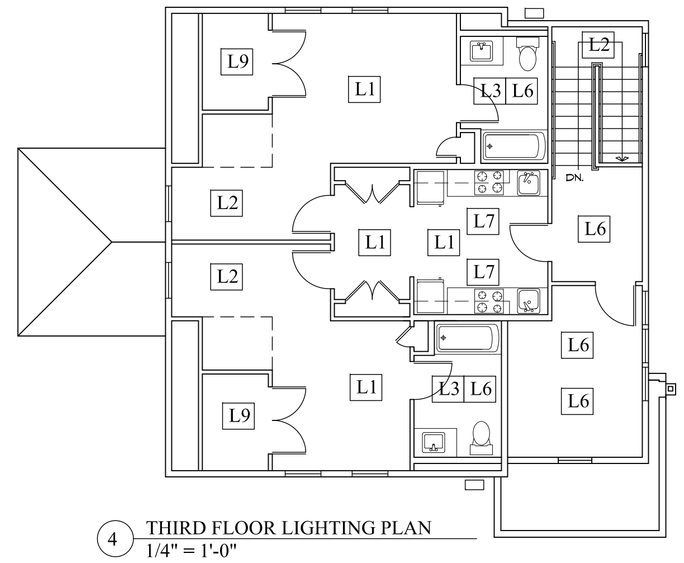


2 FIRST FLOOR LIGHTING PLAN
1/8" = 1'-0"

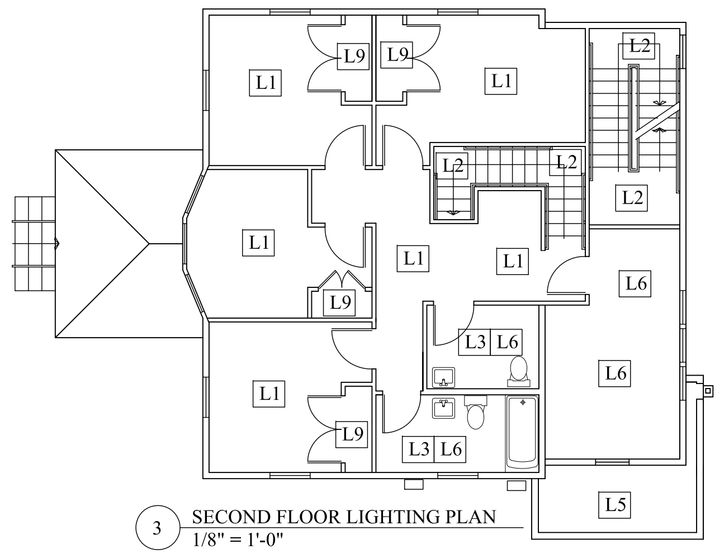


1 BASEMENT LIGHTING PLAN
1/8" = 1'-0"

| LIGHTING FIXTURE SCHEDULE - BASED ON COOPER LIGHTING | | |
|---|---|---|
| TYPE | DESCRIPTION | MOUNTING & INSTRUCTIONS |
| L1 | COOPER LIGHTING - METALUX DECORATIVE SOFT SIDE ACRYLIC CLOUD FLUORESCENT CEILING FIXTURE - 2U632R, 2'x2'. | CEILING MOUNTED. |
| L2 | COOPER LIGHTING - METALUX CIRCLINE DECORATIVE SERIES FLUORESCENT ACRYLIC SAUCER CEILING FIXTURE - #1413, 11" DIAMETER. | CEILING MOUNTED, SEE LIGHTING NOTE 1. |
| L3 | COOPER LIGHTING - METALUX RESIDENTIAL WALL BRACKET SERIES FLUORESCENT WALL MOUNTED WALL CLOUD FIXTURE - #6232, 24". | WALL MOUNTED ABOVE BATHROOM MIRROR. |
| L4 | COOPER LIGHTING - METALUX INDUSTRIAL WORKLIGHT FLUORESCENT FIXTURE, #IC8232, 4'X1'. | CEILING MOUNTED. |
| L5 | VANTAGE LUMINAIRES RECESSED FLUORESCENT EXTERIOR FIXTURE - #ASTHP2. | QUANTITY OF TWO: ONE RECESSED IN PORCH CEILING, ONE RECESSED IN CANTILEVERED ROOF OVER PORCH STEPS. |
| L6 | COOPER LIGHTING - METALUX CIRCLINE DECORATIVE SERIES FLUORESCENT ACRYLIC SAUCER CEILING FIXTURE - #1413, 14" DIAMETER. | CEILING MOUNTED. |
| L7 | COOPER LIGHTING - METALUX ELECTRONIC UNDERCABINET SERIES - #5836EB, INSTALL FULL LENGTH OF WALL HUNG CABINETS. | SURFACE UNDER CABINET |
| L8 | NOT USED. | |
| L9 | COOPER LIGHTING - HALO 6-INCH TRIM WITH DROP OPAL LENS, WHITE. | CLOSET LIGHT - CEILING MOUNTED. |

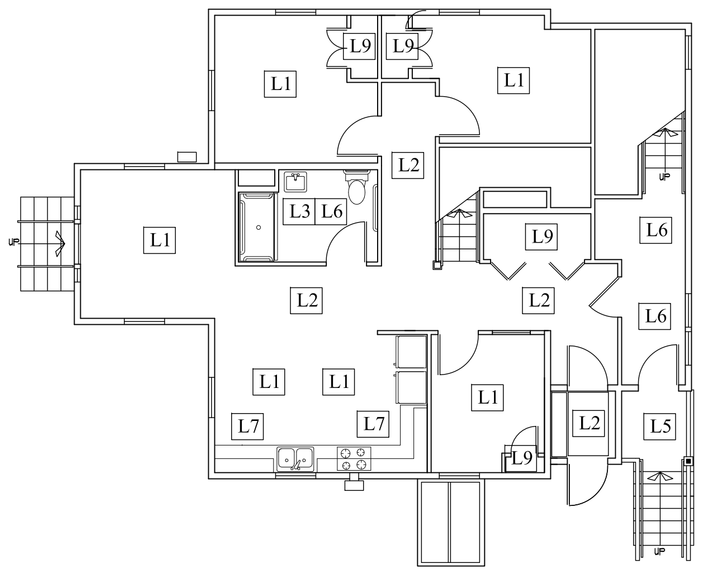LIGHTING NOTE:
1. AT WHEELCHAIR LIFT ENCLOSURE: LIGHTING FIXTURE TYPE L2 AT WHEELCHAIR LIFT SHALL BE ILLUMINATED 24 HOURS PER DAY, 7 DAYS PER WEEK. EMERGENCY LIGHT SHALL BE ON SAME CIRCUIT AS FIXTURE L2.

LICENSED ARCHITECT JOHN R. SHIELDS No. 2641 STATE OF MAINE

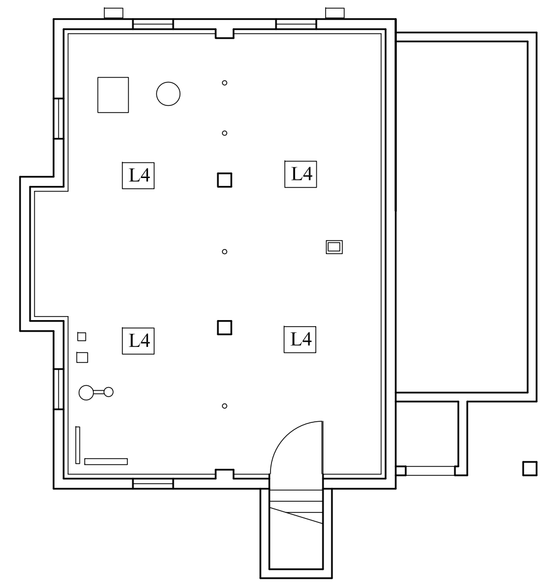Architect
SHIELDS ARCHITECTURE
216 Range Road, Cumberland, Maine
(207) 776-8926

Scale As Noted

Date 4/8/13

Project:
ADDITION & RENOVATIONS
503 WOODFORD STREET
PORTLAND, MAINE

Drawing
LIGHTING PLANS

A-6a