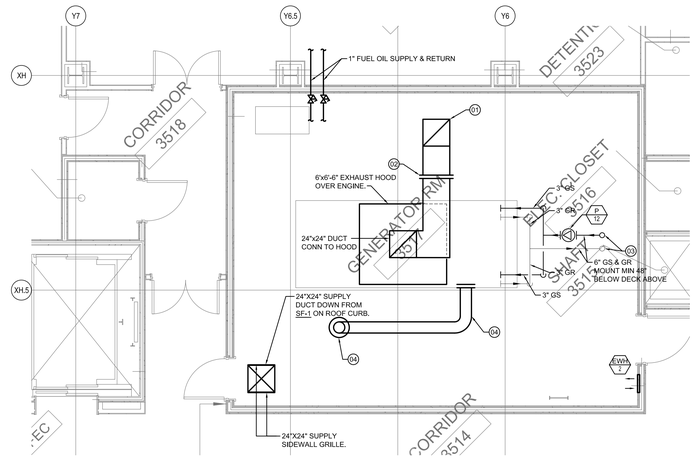

GENERATOR ROOM 3517 ENLARGED PLAN 1

SCALE: 1/4" = 1'-0"

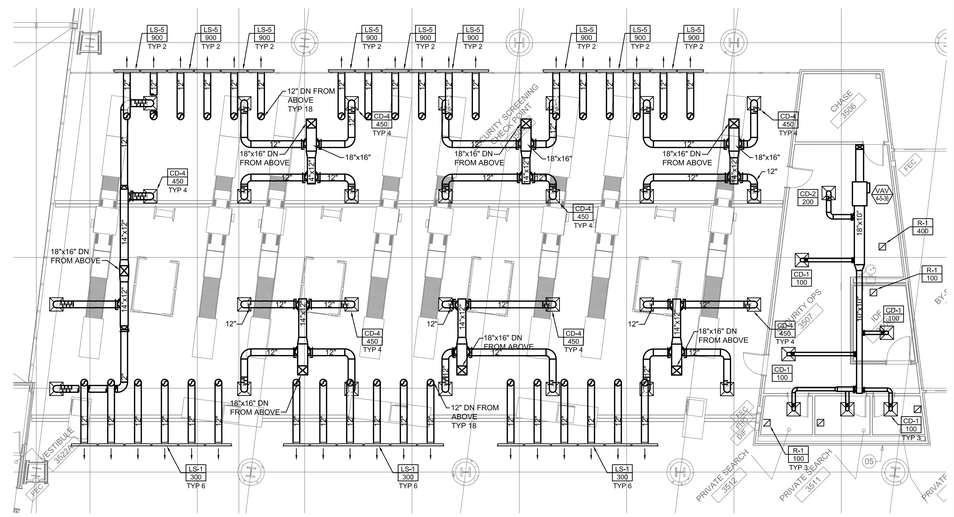

SECURITY SCREENING CHECKPOINT DUCTWORK PART PLAN - LEVEL 4 - ZONE 5 2

SCALE: 1/8" = 1'-0"

SHEET NOTES

01 24"x24" RELIEF DUCT UP TO RELIEF HOOD RH-1 ON ROOF CURB.

02 FLANGED CONNECTION FOR SERVICE REMOVAL OF EXHAUST HOOD

03 6" GS & GR LINES UP TO REMOTE RADIATOR ON ROOF

04 10"Ø DIESEL ENGINE EXHAUST WITH 4" THICK HIGH TEMPERATURE INSULATION. INSULATE FROM ENGINE CONNECTION TO UNDERSIDE OF ROOF THIMBLE. LEAVE CLEARANCE FOR AIRFLOW THROUGH THIMBLE. RISE THROUGH ROOF. FOR CONT REFER TO M04.RP.05

GENERAL NOTES

A SEE SHEET M00.00 FOR LEGEND AND GENERAL NOTES.

Portland International Jetport

1001 Westbrook Street
Portland, Maine 04102

Gensler
2020 K Street, NW
Suite 200
Washington, DC 20006
Telephone 202.721.5200
Facsimile 202.872.8587

WEST ASSOCIATES, INC.
343 Gorham Road, South Portland, ME 04106 P: (207) 741-1770 F: (207) 774-1246 www.west.com
engineers · architects · surveyors · construction managers

Issue	Date & Issue Description	By	Check
01	07/11/08	PWZ	RHB
	SCHEMATIC DESIGN		
02	09/22/08	PWZ	RHB
	DESIGN DEVELOPMENT		
03	12/03/08	PWZ	RHB
	75% CONSTRUCTION DOCUMENTS		
04	01/23/09	PWZ	RHB
	95% CONSTRUCTION DOCUMENTS		
05	10/26/09	PWZ	RHB
	ISSUED FOR PERMIT		

Seal/Signature

STATE OF MAINE ROBERT H. BROWN No. 4602 REGISTERED PROFESSIONAL ENGINEER

Robert H. Brown 10/26/09

Project Name

PWM Terminal Enhancement

Project Number

09.6395.000

CAD File Name

T:\5330101\Sheets\M08.01.dwg

Description

MECHANICAL PART & ENLARGED PLANS

Scale

AS NOTED

Ref. North

M08.01

©2009 Gensler