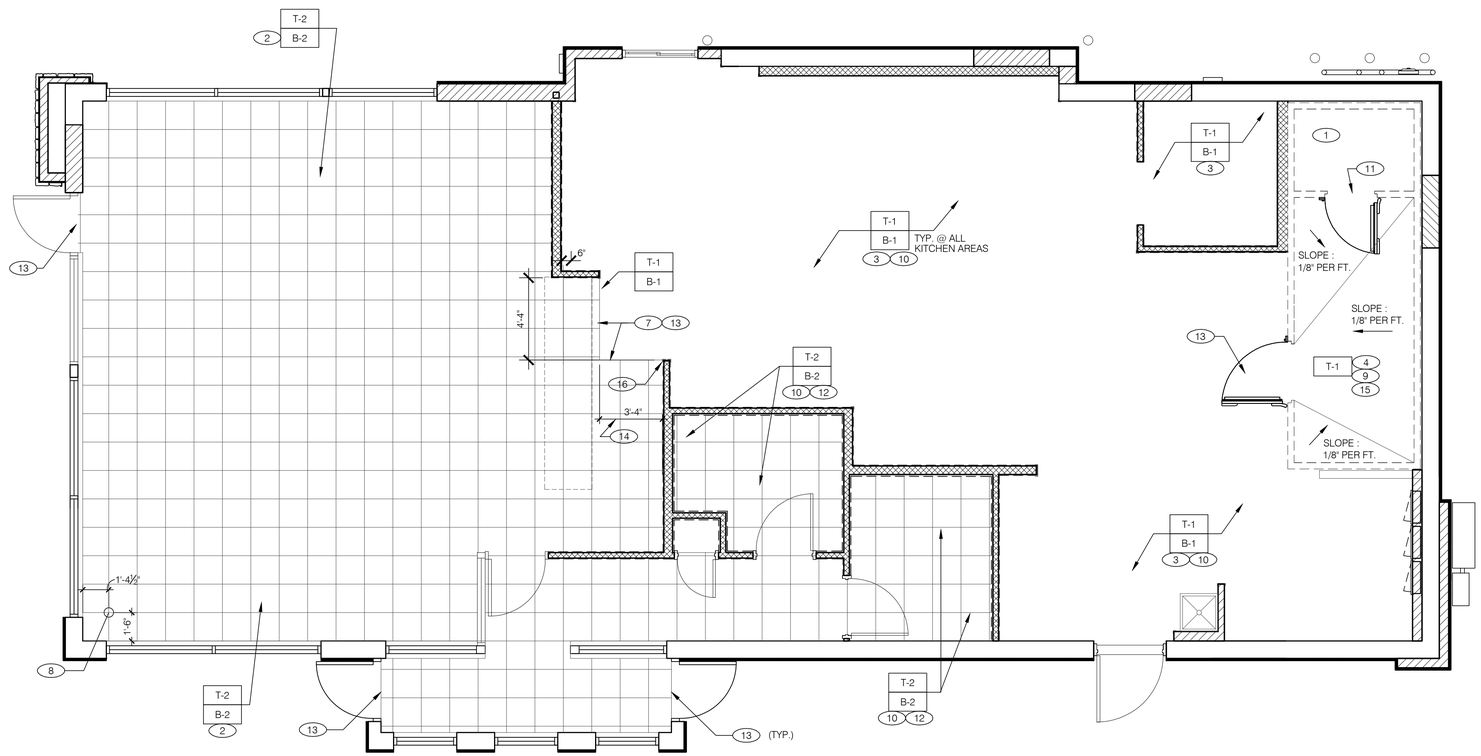

FLOOR FINISH PLAN 1/4"=1'-0" **A**

NOT USED **F**

A. ▭ DENOTES FINISH MATERIAL. REFER TO SHT A7.2 FOR FINISHES.

B. TILE JOINTS (U.O.N.):
1. QUARRY FLOOR TILE : 1/4"
2. PORCELAIN FLOOR TILE : 3/16"
3. GLAZED WALL TILE : 1/8"
4. BASE, TRIM AND ACCESSORIES : MATCH ADJOINING TILE UNITS

C. TILE INSTALLATIONS REQUIRE MANUFACTURERS STANDARD MOLDED CORNERS AT BOTH INSIDE AND OUTSIDE CORNERS.

D. ALL BASE TILE SHALL BE SANITARY COVE STYLE WITH 3/8" MIN RADIUS UNLESS NOTED OTHERWISE.

E. SEE SCOPE OF WORK SHEETS FOR RESPONSIBILITIES.

F. PROVIDE CLEAR SILICONE CAULK WHERE FRP STOPS AT TOP OF COVE BASE.

G. TILE CHIPPING AROUND CORE DRILL HOLES FOR SEATING FIXTURE WILL NOT BE ACCEPTED.

FINISH NOTES **D**

1. FACTORY FLOOR FINISH (GALV STL) W/ INTEGRAL COVE BASE
2. 6" COVE TILE BASE. SEE DETAIL 8/A6.3 FOR INSTALLATION.
3. 6" SANITARY COVE TILE BASE. SEE DETAIL 4/A6.3.
4. PROVIDE FLOOR TILE INSIDE WALK-IN COOLER (NO TILE OR BASE IN FREEZER). FLOAT FLOOR TILE IN COOLERS TO DRAIN TO KITCHEN. COORD. WITH COOLER WALL CONFIGURATION.
5. NOT USED.
6. NOT USED.
7. FLOOR TILE SHALL TRANSITION AT SERVICE COUNTER WALL.
8. START POINT FOR FLOOR TILE.
9. METAL BASE IN COOLER; SEE SCOPE OF WORK. SEE DETAIL 1/A6.3.
10. REFER TO STRUCT DRAWINGS FOR CONC FLOOR SLOPES AROUND FLOOR DRAINS.
11. FLOAT FLOOR TILE TO MEET FREEZER FLOOR FLUSH. COORD WITH FREEZER THRESHOLD INSTALLATION.
12. SANITARY TILE BASE IN RESTROOMS. SEE DETAIL 12/A6.3 FOR INSTALLATION.
13. FLOAT FLOOR TILE FOR FLUSH TRANSITION.
14. DIMENSION STRING REPRESENTS LINE OF FLOOR TILE TRANSITION.
15. NO BASE TILE BEHIND W-075 WALK-IN COOLER/FREEZER.
16. ALIGN TOP OF B-2 AND B-1. SEE DETAIL 9/A6.4.

KEY NOTES **B**

MARK D. MCCLUGGAGE AIA, CCS
1525 E. Douglas Wichita, KS 67211
Tel: (316) 265-5267
Fax: (316) 265-5646
www.gbmv.com
MAINE LIC. # ARC-2323

LICENSED ARCHITECT
MARK D. McCLUGGAGE
No. AN2323
STATE OF MAINE

07/14/16

15034.000

CONTRACT DATE:	07.06.2016
BUILDING TYPE:	CONVERSION
PLAN VERSION:	FEBRUARY 2015
SITE NUMBER:	XXX-XXX
STORE NUMBER:	XXXXX

TACO BELL

1363 WASHINGTON AVE.
PORTLAND, ME

CONVERSION
LIVE MAS - MEDIUM40

FLOOR FINISH PLAN

A7.0

PLOT DATE: