NOT USED N.T.S. | 10

1. DIMENSIONS ON THIS DWG. ARE TO ROUGH OPENING. REFER TO SHEETS A1.0 AND A5.0
2. ENTIRE STOREFRONT SYSTEM SHALL BE DARK BRONZE ANODIZED.
3. NOT USED.
4. SEE SCHEDULE FOR GLASS TYPES.
5. REFER TO FLOOR PLAN, ELEVATIONS AND WALL SECTIONS FOR ROUGH OPENING DIMENSIONS.
6. ALL STOREFRONT MATERIAL AND GLAZING SHALL BE SUPPLIED AND INSTALLED BY G.C. U.O.N.

NATIONAL ACCOUNT SUPPLIER

INTERIOR DOORS, FRAMES & HARDWARE

LOCKNET
CONSTRUCTION@LOCKNET.COM
800 JOHN C. WATTS DR.
NICHOLASVILLE, KY 40356
855-432-4613, FAX: 877-887-4958

GLASS SCHEDULE

(A) 1" INSULATED GLASS
(B) 1" INSULATED TEMPERED GLASS
(C) 1/4" TEMPERED GLASS

NOTE:
GLAZING SHALL BE EQUAL TO PPG SOLARBAN 60 STARPHIRE ULTRA-CLEAR GLASS OR EQUIVALENT OF A TINT TO MATCH THE EXISTING WINDOWS WITH SGHC OF .39.

GREEN

**** ALL STOREFRONT GLAZING SHALL BE LOW "E" SOLAR GLASS ****

NOTES N.T.S. | 7

NOT USED N.T.S. | 4

1. LAMINATE DOORS 4, 5, 6 & 7 AND PAINT FRAMES 3, 4, 5, 6 & 7. SEE FINISH SCHEDULE, SHEET A7.2.
2. ALL HARDWARE SHALL BE US32D U.O.N.
3. ALL HM FRAMES SHALL BE 16 GA STEEL U.O.N.
4. ALL LOCKS SHALL BE FALCON 6 PIN INTERCHANGEABLE CORE SUPPLIED AND INSTALLED BY THE G.C. ALL EXTERIOR LOCKS SHALL BE PROVIDED WITH CONSTRUCTION CORES. ALL PERMANENT CORES SHALL BE KEYED ALIKE.
5. PERMANENT CORES SHALL BE SHIPPED TO THE RESTAURANT GENERAL MANAGER.
6. MOUNT DOOR CLOSERS ON RESTROOM OR KITCHEN SIDE ONLY.
7. COMPLETE DOOR, FRAME AND HARDWARE PACKAGE INCLUDING: VISION PANEL (WITH 18 GA. HOLLOW METAL FRAME), CONTINUOUS HINGE, HEAVY DUTY CLOSER, RAIN DRIP, DOOR BOTTOM/ SWEEP, WEATHERSTRIP, KICKPLATE AND PANIC HARDWARE, ORDERED THRU LOCKNET SECURITY DOORS, PART #DU3670L52VED (1-800-887-4307).
8. PROVIDE PUSH/ PULL PLATES.
IF REQUIRED BY LOCAL CODE, STOREFRONT DOOR PANIC HARDWARE SHALL BE :
DOR-O-MATIC 2092 RIM PANIC HARDWARE AND EXTERIOR PULLS WITH QUALITY #520 DOOR PULL.
9. MOUNT KICKPLATE ON PUSH SIDE ONLY.
10. MAXIMUM DOOR OPERATING PRESSURE : 5 LBS INTERIOR : 8 LBS EXTERIOR.
11. ADA COMPLIANT ACCESSIBILITY SIGNAGE, INCLUDE BRAILLE AS REQUIRED BY LOCAL JURISDICTION - (1) MEN; (1) WOMEN
12. RESTROOM SIGN REQUIRED.
13. INSTALL WITH REMOVABLE DOOR STOPS AND WEATHER STRIPS.
14. FRAMES SHALL BE PAINTED.
15. RESTROOM PARTITIONS : BOBRICK 1080 SERIES, WITH STAINLESS STL. 1 1/2" WALL POST, LATCH , KEEPER, COAT HOOK (DTL 20/ADA1.0) & MOUNTING BRACKETS. INSTALL PER MANUFACTURER'S SPECIFICATIONS & DETAILS. DOOR HANDLE AND LATCH SHALL BE MOUNTED AT 36" A.F.F.
16. PROVIDE LATCH AND STRIKE PLATE HARDWARE BY DOOR MFR. TO BE COMPATIBLE WITH LOCKS
17. 3'-0" x 7'-0" H.M. DOOR WITH 2" H.M. FRAME MAY BE USED.

DOOR SCHEDULE NOTES | 1

MARK D. MCCLUGGAGE AIA, CCS
1525 E. Douglas Wichita, KS 67211
Tel: (316) 265-5367
Fax: (316) 265-5646
www.mdmccluggage.com
MAINE LIC. # ARC-2323

DOOR NO.	DOOR SIZE	TYPE	DOOR	FRAME	BUTTS 1	BUTTS 2	BUTTS 3	BUTTS 4	LOCKS 1	LOCKS 2	LOCKS 3	LOCKS 4	LOCKS 5	LOCKS 6	LOCKS 7	CLOSERS 1	CLOSERS 2	CLOSERS 3	KICKPLATE 1	KICKPLATE 2	KICKPLATE 3	THRESHOLD 1	THRESHOLD 2	THRESHOLD 3	THRESHOLD 4	DOOR STOP 1	DOOR STOP 2	DOOR STOP 3	PUSH	PULL	MISCELLANEOUS 1	MISCELLANEOUS 2	MISCELLANEOUS 3	MISCELLANEOUS 4	MISCELLANEOUS 5	MISCELLANEOUS 6	DETAIL LOCATIONS HEAD	DETAIL LOCATIONS JAMB	DETAIL LOCATIONS SILL	DOOR NOTES
		SEE DOOR TYPE ELEVATIONS			ONE PAIR OFFSET PIVOTS PER DOOR MANUFACTURER (TOP & BOTTOM)	1 1/2 PR McKINNEY # PA2731, 4-1/2" x 4-1/2"	CONT. HINGE INCLUDED IN PACKAGE	H.D. TYPE 304 S.S. BOBRICK SPRING LOADED	YALE B-PB5405LN	YALE B-PB5407LNIC	FULL LENGTH LATCH PROTECTOR INCL. IN PKG.	PANIC HARDWARE INCLUDED IN PACKAGE	FALCON C933-7 OR C987-7 AS REQUIRED	FALCON "T" SERIES - PRIVACY SET	FALCON 1690 CONCEAL VERT. PANIC HARDWR	DORMA 8616 x 689	CLOSER INCLUDED IN PACKAGE	DORMA 7414 ARP SNB 689	STAINLESS STEEL 10" x .050 X 2" L.T.D.W.*	KICKPLATE INCLUDED IN PACKAGE		ACCESSIBLE ALUM. THRESHOLD BY DOOR MFR.	THRESHOLD INCLUDED IN PACKAGE			FLOOR STOP - ROCKWOOD 441 CU	HINGE STOP - ROCKWOOD 532.NP	WALL STOP - ASA 0714 COAT HOOK W/ BUMPER	PUSH PLATE ROCKWOOD 70F - 8" x 16"	PULL PLATE TRIMCO 1017-3B - 4" x 16"	STD. ADJUSTABLE DOOR SWEEP PER DR. MFR.	SWEEP (VISTA 231 STD) NGP 101VA	UNDERCUT 3/4"	PROVIDE A SIGN STATING "THIS DOOR TO REMAIN UNLOCKED DURING BUSINESS HOURS"	COAT HOOK - BOBRICK	DOOR SIGN				* LESS THAN DOOR WIDTH
1	3'-0" x 7'-0" x 1-3/4"	A	AL	AL	X							X		X	X							X									X			X					12/A6.1	8, 10, 16
2	3'-6" x 7'-0" x 1-3/4"	C	HM	HM			X				X	X					X			X			X			X					X						9/A6.1	6/A6.1	10/A6.2	6, 7, 10
3	3'-0" x 7'-0" x 1-3/4"	A	AL	AL	X								X		X	X						X										X		X					12/A6.1	8, 10, 16
4	2'-0" x 6'-8" x 1-3/4"	F	WD	HM		X			X																	X							X				10/A6.4	10/A6.4		
5	3'-0" x 6'-8" x 1-3/4"	D	WD	HM		X								X				X	X								X		X	X			X			X	X	10/A6.4	10/A6.4		6, 9, 10, 11, 12, 14
6	3'-0" x 6'-8" x 1-3/4"	D	WD	HM		X								X				X	X								X		X	X			X			X	X	10/A6.4	10/A6.4		6, 9, 10, 11, 12, 14

DOOR SCHEDULE | 2

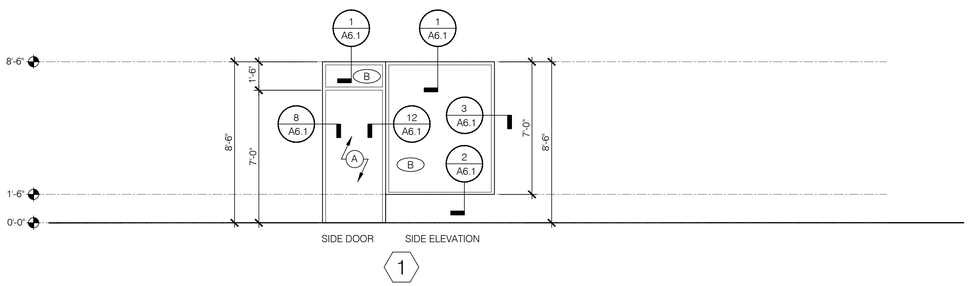

1

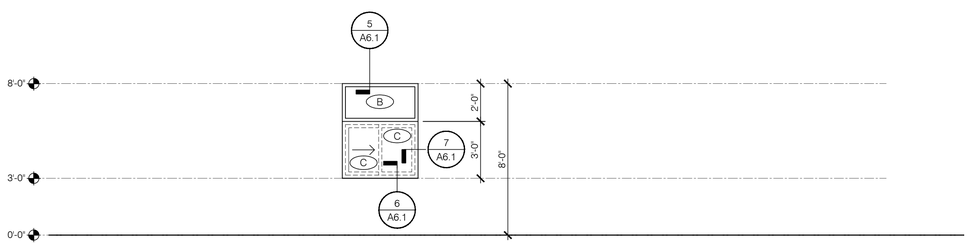

2

DRIVE-THRU WINDOW TRANSOM. SEE SCOPE OF WORK FOR DRIVE-THRU WINDOW INFORMATION. SEE ALSO DETAIL 16/A6.1

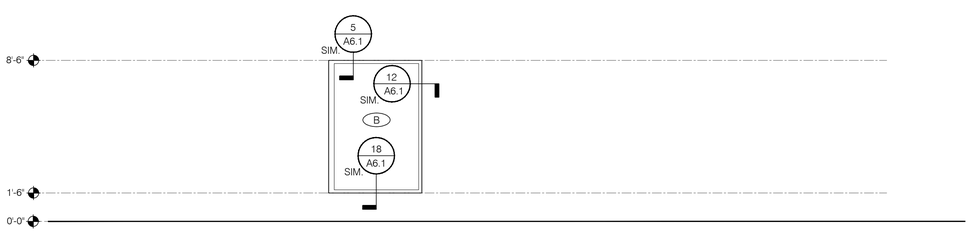

3

VESTIBULE ELEVATION

NOTE: ELEVATIONS DRAWN AS VIEWED FROM EXTERIOR OF BUILDING.

WINDOW TYPES 1/4" = 1'-0" | 9

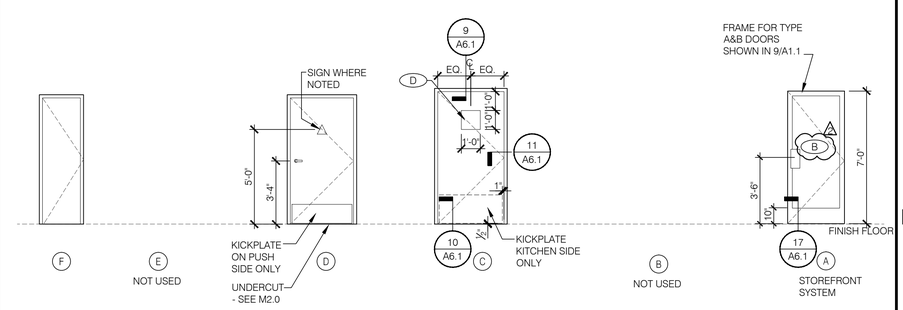

NOTE: ELEVATIONS DRAWN AS VIEWED FROM EXTERIOR OF BUILDING OR OUTSIDE ROOM.

DOOR TYPES 1/4" = 1'-0" | 3

LICENSED ARCHITECT
MARK D. McCLUGGAGE
No. AN2323
10/18/16
STATE OF MAINE

15034.000

2	REVISION 2	10/14/16

CONTRACT DATE:	07.06.2016
BUILDING TYPE:	CONVERSION
PLAN VERSION:	FEBRUARY 2015
SITE NUMBER:	XXX-XXX
STORE NUMBER:	XXXXX

TACO BELL

1363 WASHINGTON AVE.
PORTLAND, ME

TACO BELL
CONVERSION
LIVE MAS - MEDIUM40

DOOR & WINDOW ELEVATIONS AND SCHEDULES

A1.1

PLOT DATE: