City of Portland, Maine - Building or Use Permit Application 389 Congress Street, 04101, Tel: (207) 874-8703, FAX: 874-8716

Location of Construction:	Owner: Phone:			Permit No:	
Owner Address:	Lessee/Buyer's Name:	Phone: BusinessName:			980095
Contractor Name:	Address: ONe City Center Pt1d,)	Phone:	POPERMAT ISSUED		
Past Use:	Proposed Use:	COST OF WORK		PERMIT FEE: \$ 50.00	FEB 1 2 1998
Gilice	Same	FIRE DEPT. A A De Signature:	nied	INSPECTION: Use Group: Type: Signature:	CITY OF PORTLAND
Proposed Project Description:	A section of the sect	D.B. Marie		ES DISTRICT (P.A.D.)	Zoning Approval:
3rd floor (Suite 300)		A	oproved venied	with Conditions:	☐ Shoreland
		Signature:		Date:	☐ Subdivision ☐ Site Plan maj ☐minor ☐mm ☐
1. This permit application does not preclude the A 2. Building permits do not include plumbing, set 3. Building permits are void if work is not started tion may invalidate a building permit and stop	Applicant(s) from meeting applicable State ptic or electrical work. I within six (6) months of the date of issue of all work	ance. False informa-			Zoning Appeal Variance Miscellaneous Conditional Use Interpretation Approved Denied
	WITH REQUIREM	VED VENTS	PERMI TH REQU	T ISSUED WIREMENTS	Historic Preservation ☐ Not in District or Landmark ☐ Does Not Require Review ☐ Requires Review Action:
I hereby certify that I am the owner of record of the authorized by the owner to make this application a if a permit for work described in the application is areas covered by such permit at any reasonable ho	s his authorized agent and I agree to consissued, I certify that the code official's au	form to all applicable I thorized representative applicable to such pe	aws of the shall havermit	is jurisdiction. In addition,	□ Denied
SIGNATURE OF APPLICANT AL FILE	ADDRESS:	DATE:	1330	PHONE:	
					<u> </u>
RESPONSIBLE PERSON IN CHARGE OF WORK	K, TITLE	v-D.P.W. Pink-Puhl	ic File	PHONE:	CEO DISTRICT

			3/12/98 Urenny left for
Type Foundation: Framing: Plumbing: Other:			Ro Comments re: production
Inspection Record Date			this muit are

Mittel, Asen, Hunter, & Carrey

For Suite 300 57 Exchange St. Portland, Maine 04101

February 3, 1998

Carpentry

- 1. Remove walls and doors at locations A, B3, C, D, & E. Repair ceilings where necessary.
- 2. Construct new wall and door at B2.
- 3. Install 1/4" thick tempered glass at half wall B1 and in existing sidelight at entrance door.

Electrical


- 1. Remove any needed electrical from walls to be removed.
- 2. Install outlets and lighting as needed to meet code.
- 3. Check all emergency and exit lighting to ensure proper operation and to meet current codes
- 4. Remove any unused network wiring, etc. from walls and ceilings.

Finishes

- 1. Patch any holes, etc. of walls to receive finishes.
- 2. Remove wallpaper at entrance wall and prep for paint.
- 3. Paint entire space with tenant color choice. (1 coat primer & 2 coats finish)
- 4. Entire space to receive new carpet. Tenant to select from owner supplied samples.

Note:

All Sprinkler (If needed), electrical, and carpentry work shall conform to local and State building and Life Safety codes.

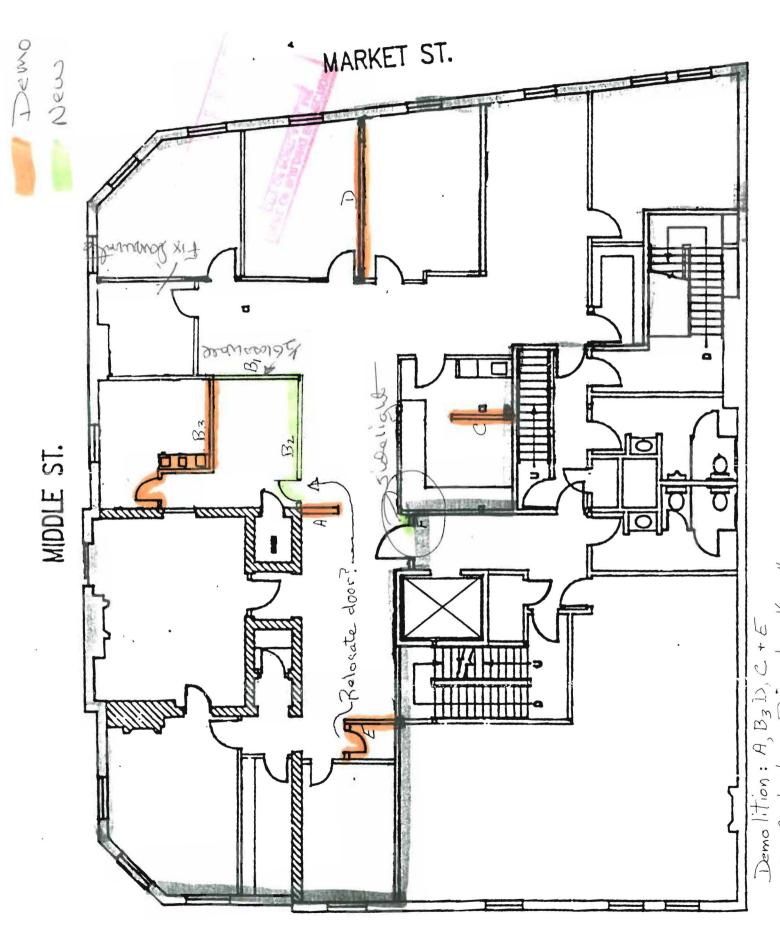

EXCHANGE STREET

BUILDING PERMIT REPORT

DATE: 2998 ADDRESS: 57 Exchange 15
REASON FOR PERMIT: renexations
BUILDING OWNER: Coldy
CONTRACTOR: Diciso Myt.
PERMIT APPLICANT: A KANGT APPROVAL: */ X/3×18×19×20 *30 DENIED
USE GROUP BOCA 1996 CONSTRUCTION TYPE 3B

CONDITION(S) OF APPROVAL

- 1. This permit does not excuse the applicant from meeting applicable State and Federal rules and laws.
 - 2. Before concrete for foundation is placed, approvals from the Development Review Coordinator and Inspection Services must be obtained. (A 24 hour notice is required prior to inspection)
 - Precaution must be taken to protect concrete from freezing.
 - It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify that the proper setbacks are maintained.
 - Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage side. (Chapter 4 Section 407.0 of the BOCA/1996)
 - All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National Mechanical Code/1993).
 - Sound transmission control in residential building shall be done in accordance with Chapter 12 section 1214.0 of the city's building code.
 - 8. Guardrails & Handrails: A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42", except Use Group R which is 36". In occupancies in Use Group A, B, H-4, I-1, I-2 M and R and public garages and open parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would provide a ladder effect. (Handrails shall be a minimum of 34" but not more than 38". Use Group R-3 shall not be less than 30", but not more than 38".)
 - Headroom in habitable space is a minimum of 76".
 - 10. Stair construction in Use Group R-3 & R-4 is a minimum of 10" tread and 7 3/4" maximum rise. All other Use group minimum 11" tread, 7" maximum rise.
 - 11. The minimum headroom in all parts of a stairway shall not be less than 80 inches. (6' 8")
 - 12. Every sleeping room below the fourth story in buildings of use Groups R and I-1 shall have at least one operable window or exterior door approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate tools. Where windows are provided as means of egress or rescue they shall have a sill height not more than 44 inches (1118mm) above the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches (610mm). The minimum net clear opening width dimension shall be 20 inches (508mm), and a minimum net clear opening of 5.7 sq. ft.
- 13. Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it exits directly from the apartment to the building exterior with no communications to other apartment units.
- 14. All vertical openings shall be enclosed with construction having a fire rating of at lest one (1)hour, including fire doors with self-closer's.
- 15. The boiler shall be protected by enclosing with (1) hour fire-rated construction including fire doors and ceiling, or by providing automatic extinguishment.
- All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City's Building Code Chapter 9, Section 19, 920.3.2 (BOCA National Building Code/1996), and NFPA 101 Chapter 18 & 19. (Smoke detectors shall be installed and maintained at the following locations):
 - In the immediate vicinity of bedrooms
 - In all bedrooms

	 In each story within a dwelling unit, including basements 			
	In addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and			
	1-1 shall receive power from a battery when the AC primary power source is interrupted. (Interconnection is required)			
	A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved type.			
	The Fire Alarm System shall be maintained to NFPA #72 Standard.			
(F)	The Sprinkler System shall maintained to NFPA #13 Standard.			
(20)	All exit signs, lights, and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections			
$\overline{}$	1023. & 1024. Of the City's building code. (The BOCA National Building Code/1996)			
21.	No construction or demolition work shall begin until you have obtained permits for dumpsters or containers. A work			
	Stop Order shall be issued if this requirement is not met.			
22.	Section 25-135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to			
	exervate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year".			
23.	The builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a			
	certification from a design professional that the plans commencing construction of the facility, the builder shall submit the			
	certification to the Division of Inspection Services.			
24.	This permit does not excuse the applicant from obtaining any license which may be needed from the City Clerk's office.			
25.	Ventilation shall meet the requirements of Chapter 12 Sections 1210, of the City's Building Code.			
26.	All electrical, plumbing and HVAC permits must be obtained by a Master Licensed holders of their trade.			
27.	All requirements must be met before a final Certificate of Occupancy is issued,			
28.	All building elements shall meet the fastening schedule as per Table 2305.2 of the City's Building Code. (The BOCA			
	National Building Code/1996).			
29.	Ventilation of spaces within a building shall be done in accordance with the City's Mechanical Code (The BOCA National			
	Mechanical Code (1993)			
_30.	This permit is for intenior work only - Any exterior or signage will be subject to Historic Preservation Yeview.			
	Will be subject to Historic Preservation Yeview.			
31.				
32.				
33.				
34.				
J+.				
	~ 0.4500			
<				
1	Samuel Att Att			
B. Sim	Hellettees, Cock Envoyegnen			

cc: Li. McDougan, PFD Marge Schmickal