K:\Jobs04\04C0829\Arch\P04C0829101.dwg April 26, 2006 - 7:02 AM

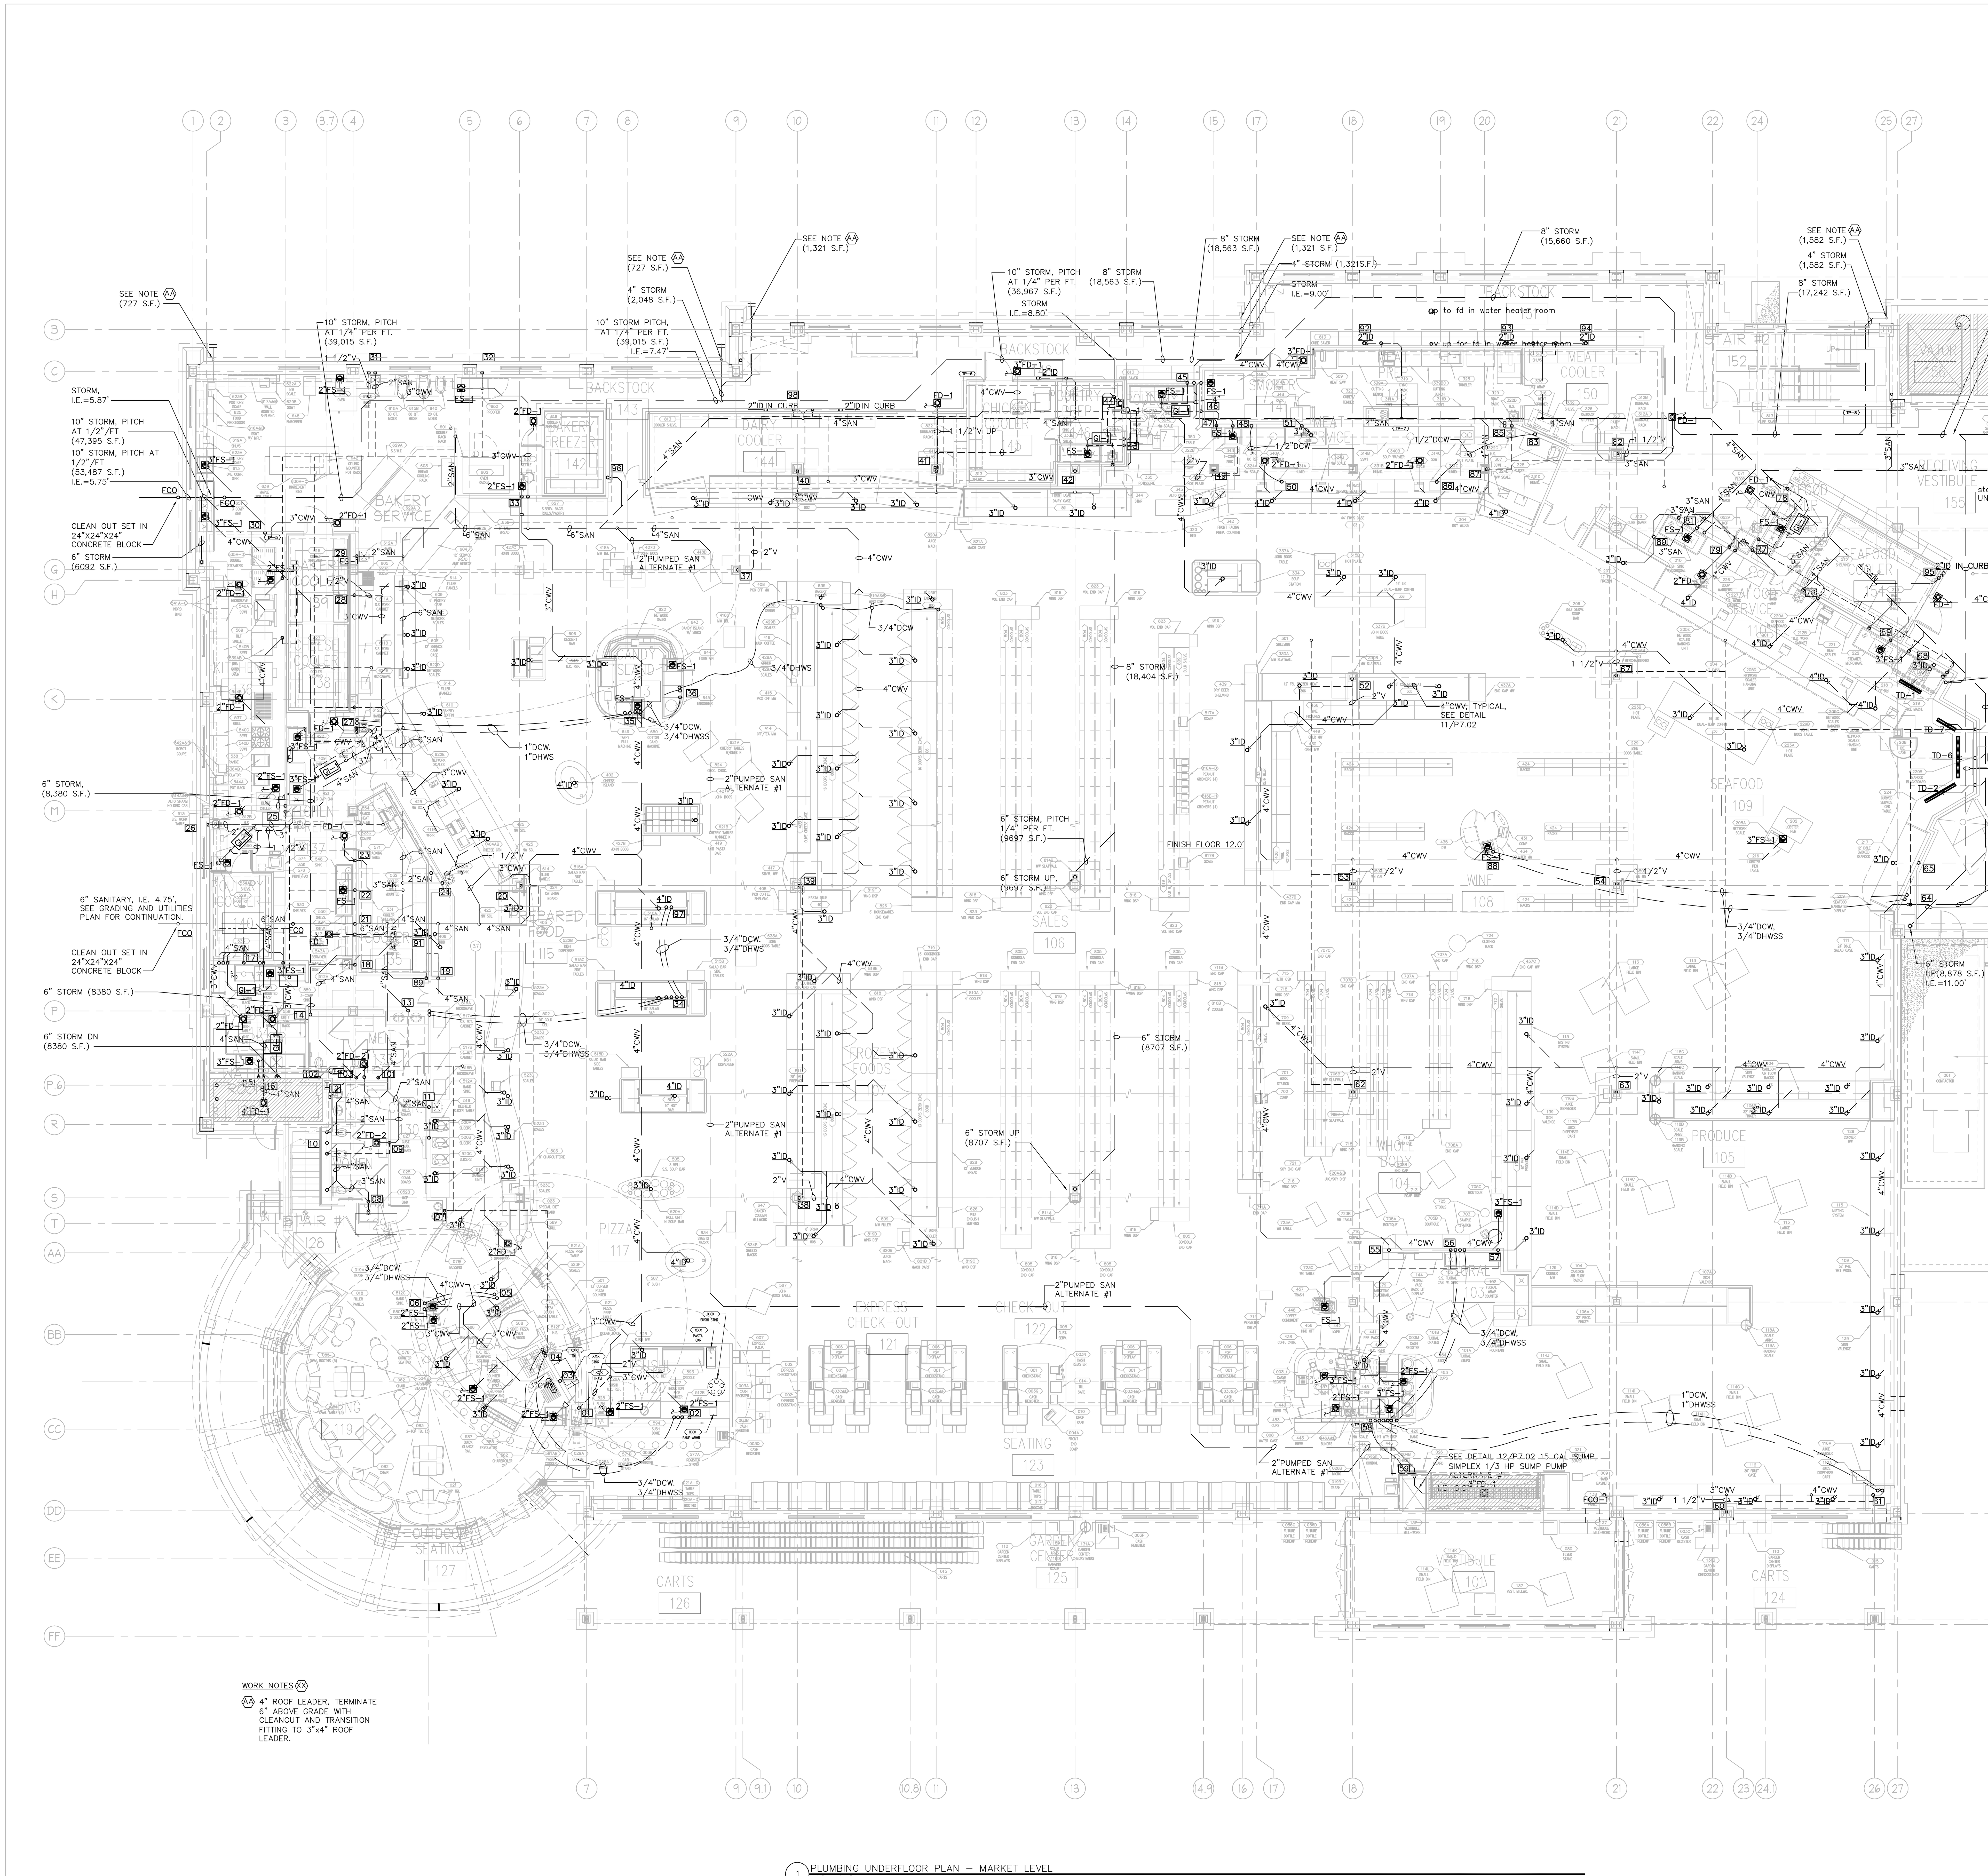

1 PLUMBING UNDERFLOOR PLAN – MARKET LEVEL
1/8" = 1'-0"

WORK NOTES (XX)

(AA) 4" ROOF LEADER, TERMINATE 6" ABOVE GRADE WITH CLEANOUT AND TRANSITION FITTING TO 3"x4" ROOF LEADER.

00 SLAB PENETRATION NOTES:
(THE ORDER THAT THE NOTES GO IN IS FROM LEFT TO RIGHT IN WALL, OR TOP TO BOTTOM IN WALL)

01 2" V UP
02 3/4" DCW, 3/4" DHWS UP
03 1 1/2" V UP
04 3/4" DHWS UP, 2" SAN UP, 3/4" DCW UP
05 3/4" DCW, 3/4" DHWS UP
06 3/4" DCW, 3/4" DHWS UP
07 2" SAN UP, 1 1/2"V UP
08 1 1/2" V UP
09 1 1/2" V UP
10 2" SAN UP TO LAVS, (3) 3" SAN UP TO WC'S
11 2" SAN UP
12 1 1/2" V UP
13 2" SAN UP TO LAVS, 3/4" DCW, 3/4" DHWS UP
14 1 1/2" V UP, 6" STORM UP, 4" SAN UP
15 1 1/2" V UP, 2" V UP
16 3" SAN UP
17 1 1/2" V UP, 1 1/2" V UP, 2" SAN UP, 1 1/2" V UP, 2" SAN UP, 1 1/2" V UP
18 2" SAN UP
19 2" V UP
20 2" V UP
21 3" V UP
22 1 1/2" V UP
23 1 1/2" V UP
24 1 1/2" V UP, 2" SAN UP
25 2" V UP, 1 1/2" V UP
26 2" SAN UP
27 1 1/2" V UP, 1" DCW UP, 1" DHWS UP, 2" SAN UP, 1 1/2" V UP
28 1 1/2" V UP
29 2" SAN UP
30 2" V UP
31 1 1/2" V UP, 2" SAN UP
32 1 1/2" V UP
33 2" V UP, 1 1/2" V UP
34 3/4" DCW, 3/4" DHWS UP, 3/4" DCW, 3/4" DHWS UP
35 3/4" DCW, 3/4" DHWS UP, 3/4" DCW, 3/4" DHWS UP
36 3/4" DCW, 3/4" DHWS UP, 3/4" DHWS UP
37 2" V UP
38 2" V UP
39 2" V UP
40 1 1/2" V UP
41 (3) 1 1/2" V UP
42 1 1/2" V UP
43 (2) 1 1/2" V UP
44 1 1/2" V UP
45 (3) 1 1/2" V UP
46 1 1/2" V UP
47 2" SAN UP
48 1 1/2" V UP, 1/2" DCW UP
49 2" V UP, 1 1/2" V UP
50 1/2" DCW UP
51 1 1/2" V UP
52 2" V UP
53 1 1/2" V UP
54 1 1/2" V UP
55 2" V UP
56 2" SAN UP, 3/4" DCW UP, 2" SAN UP, 3/4" DHWS UP
57 1 1/2" V UP
58 3/4" DCW UP, 1" DHWS UP, 2" V UP 1" DCW UP, 3/4" DHWS UP, 3/4" DCW UP
59 3/4" DCW UP, 1 1/2" V UP, 1 1/2" PUMPED SAN UP
60 1 1/2" V UP
61 1 1/2" V UP, 1" DHWS UP, 1" DCW UP,
62 2" V UP
63 2" V UP
64 3/4" DCW, 3/4" DHWS UP, 2" V UP
65 1 1/2" V UP
66 (3) 1 1/2" V UP
67 1 1/2" V UP
68 1 1/2" V UP, 1 1/2" V UP
69 2" SAN UP, 1 1/2" V UP
70 1 1/2" V UP, 1 1/2"V UP
71 1 1/2" V UP
72 1 1/2" V UP
73 1 1/2" V UP
74 2" SAN UP, 2" SAN UP
75 1 1/2" V UP
76 2" SAN UP, 1 1/2" V UP
77 (2) 1 1/2" V UP
78 (2) 1 1/2" V UP
79 (2) 1 1/2" V UP
80 1 1/2" V UP
81 2" SAN UP, 1 1/2" V UP
82 1 1/2" V UP
83 1/2" DCW UP
84 NOT USED
85 4" SAN UP, 2" SAN UP
86 1/2" DCW UP
87 1 1/2" V UP
88 3/4" DCW, 3/4" DHWS UP
89 2" SAN UP
90 2" SAN UP
91 1 1/2" V UP
92 1 1/2" V UP
93 1 1/2" V UP
94 1 1/2" V UP
95 1 1/2" V UP
96 4" SAN UP
97 3/4" DCW UP, 3/4"DHWS UP
98 (2) 1 1/2" V UP
99 3" SAN UP, 1 1/2" V UP
100 3" SAN DN
101 2" SAN UP TO UR
102 4" SAN UP TO UR
103 4" SAN UP TO UR

NORTH

THESE DRAWINGS SHALL NOT BE UTILIZED BY ANY PERSON, FIRM OR CORPORATION WITHOUT THE SPECIFIC WRITTEN PERMISSION OF BL COMPANIES

BL Companies
ARCHITECTURE
ENGINEERING
PLANNING
LANDSCAPE ARCHITECTURE
LAND SURVEYING
ENVIRONMENTAL SCIENCES
ANALYTICAL SERVICES

355 Research Parkway
Meriden, CT 06450
(203) 630-1406
(203) 630-2615 Fax

WHOLE FOODS MARKET

ISSUED FOR CONSTRUCTION

PROPOSED GROCERY STORE
2 SOMERSET STREET
PORTLAND, CUMBERLAND COUNTY, MAINE

No. Date Desc.

REVISIONS
No. Date Desc.

ARCHITECT/ENGINEER SEAL

Designed
Drawn
Checked
Approved
Scale AS NOTED
Project No. 04C0829
Date 04-24-06
CAD File

Title
PLUMBING UNDERFLOOR PLAN – MARKET LEVEL

Sheet No.
P1.01