
Location of Construction:	Owner:		Phone:		Permit No9 9 09 0 2
10 Exchange St Owner Address:	Lessee/Buyer's Name:	Phone:	Busines	ssName:	
owner Address.	John Kelly	ang		r 4 Hemp	PERMIT ISSUED
Contractor Name:	Address:	Phe	one:		Permit Issued:
		COST OF WC	DV.	DEDAGED FEE	AUG 2 0 1959
Past Use:	Proposed Use:	COST OF WC \$	1	PERMIT FEE: \$ 30.00	~
Fipe Shop?	Retail	FIRE DEPT.	Approved Denied	INSPECTION: Use Group: Type:	CITY OF PORTLAND
		Signature:	tinc	Signature:	Zone: CBL: M-3 032-I-012
Proposed Project Description:			ACTIVITI	ES DISTRICT (P.A.D.)	Zoning Approval:
Chagge of Use (Retail c.	Action: Approved Approved with Conditions: Denied			Shoreland	
		Signature:		Date:	Subdivision
Permit Taken By: SP	Date Applied For:	Augout 1,	999		Site Plan maj Ominor Omm O
<ol> <li>Building permits do not include plun</li> <li>Building permits are void if work is n tion may invalidate a building permit</li> </ol>	ot started within six (6) months of the date of	issuance. False inform	а-		☐ Miscellaneous ☐ Conditional Use ☐ Interpretation ☐ Approved ☐ Denied
authorized by the owner to make this app if a permit for work described in the appli areas covered by such permit at any reaso	<b>CERTIFICATION</b> ord of the named property, or that the proposed lication as his authorized agent and I agree to cation is issued, I certify that the code official mable hour to enforce the provisions of the co	conform to all applica l's authorized represen ode(s) applicable to su August 2, 19	ble laws of th tative shall ha ch permit	his jurisdiction. In addition, we the authority to enter all	Historic Preservation Not in District or Landmark Does Not Require Review Requires Review Action: Approved Approved Denied Date:
SIGNATURE OF APPLICANT	ADDRESS:	DATE:		PHONE:	
RESPONSIBLE PERSON IN CHARGE O	F WORK, TITLE			PHONE:	CEO DISTRICT
v	/hite-Permit Desk Green-Assessor's C	anary-D.P.W. Pink-	Public File	Ivory Card-Inspector	


## City of Portland, Maine - Building or Use Permit Application 389 Congress Street, 04101, Tel: (207) 874-8703, FAX: 874-8716



upstairs portion

17-2 Film +

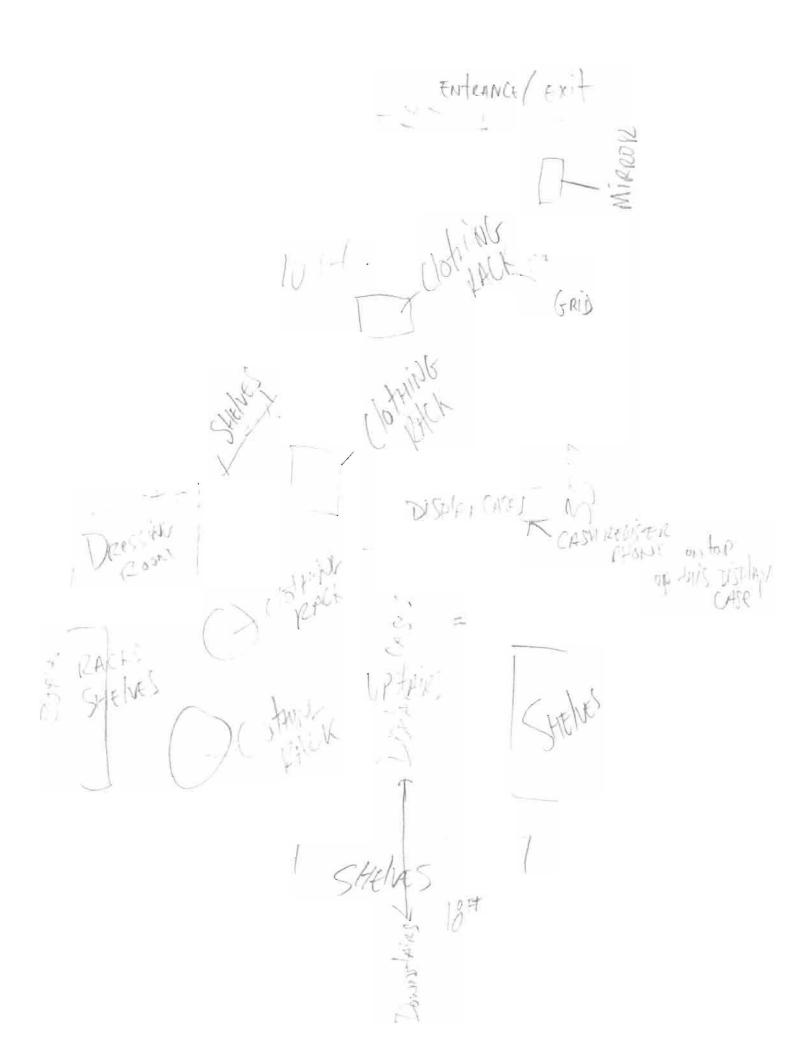



## THIS IS NOT A PERMIT/CONSTRUCTION CANNOT COMMENCE UNTIL THE PERMIT IS ISSUED Building or Use Permit Pre-Application

Attached Single Family Dwellings/Two-Family Dwelling

Multi-Family or Commercial Structures and Additions Thereto

In the interest of processing your application in the quickest possible manner, please complete the Information below for a Building or Use Permit.

NOTE\*\*If you or the property owner owes real estate or personal property taxes or user charges on ANY PROPERTY within the City, payment arrangements must be made before permits of any kind are accepted.

Location/Addressof Construction (include Portion of Building)	10 EX	CHANGE STR.	1D	
Total Square Footage of Proposed Structure	-	Square Footage of Lot	800	sq.ft-
Tax Assessor's Chart, Block & Lot Number Chart# $32$ Block# $I$ Lot# $0/2$	Owner:	Joe Solely		Telephone#: 253.1655
Owner's Address:		's Name (If Applicable) IN KE/lY		Cost Of Work:
Proposed Project Description: (Please be as specific as possible) Refail (phy NS St	7	change of	CP2	£
Contractor's Name, Address & Telephone				Rec'd By
Current Use: Pice's Shop?		Proposed Use:	2. 12	7
	acted in comp with the 1996 litioning) inst n: Your Deed or of your Const 3) A Plot r the above pr plan.	bliance with the State of N National Electrical Code tallation must comply wi Purchase and Sale Agre truction Contract, if avail Plan/Site Plan	Iaine Plun as amend th the 199 ement able	abing Code. ed by Section 6-Art III.
Unless exempted by State Law, constru	ction docum	ents must be designed by		ed design professional.
A complete set of construction drawings showing a				
<ul> <li>Cross Sections w/Framing details (include Floor Plans &amp; Elevations</li> </ul>	ing porches, c	iecks w/ rainings, and acces	sory structi	ires)
Window and door schedules				
<ul> <li>Foundation plans with required drainage</li> </ul>				
<ul> <li>Electrical and plumbing layout. Mechanic equipment HVAC equipment (air handli</li> </ul>				

Certification

I hereby certify that I am the Owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his/her authorized agent. I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in this application is issued, I certify that the Code Official's authorized representative shall have the authority to enter all areas covered by this permit at any reasonable hour to enforce the provisions of the codes applicable to this permit.

Signature of applicant:	Y	·h/	Date: 8.2.99	
Building		eview and related fees are att	.00 per \$1,000.00 construction cost thereafter. tached on a separate addendum	
	Cal	If of Plu	253-1655	

BUILDING PERMIT REPORT

DAT	E: <u>3A4999</u> ADDRESS: <u>10 Exchange ST-</u> CBL: <u>32-I-012</u>
REA	E: <u>3AUG999</u> ADDRESS: <u>10 Exchange ST-</u> CBL: <u>32-I-Ø12</u> SON FOR PERMIT: <u>Interior Renovations</u>
ROIT	LDING OWNER: Joe Soley
PER	MIT APPLICANT: A Wear Four hemp 1 Contractor
USE	$GROUP \underline{M} CONSTRUCTION TYPE \underline{3B}$
	City's Adopted Building Code (The BOCA National Building Code/1996 with City Amendments) City's Adopted Mechanical Code (The BOCA National Mechanical Code/1993)
	CONDITION(S) OF APPROVAL
This Appr	permit is being issued with the understanding that the following conditions are met: $\frac{*/, *9, *11, *12, *13, *17, *0, 2) +22}{27 + 29 + 36 + 33 + 34 + 31 - 5}$ oved with the following conditions:
X1. 2.	This permit does not excuse the applicant from meeting applicable State and Federal rules and laws.
2.	Before concrete for foundation is placed, approvals from the Development Review Coordinator and Inspection Services must be obtained.
3.	(A 24 hour notice is required prior to inspection) Foundation drain shall be placed around the perimeter of a foundation that consists of gravel or crushed stone containing not more than
5.	10 percent material that passes through a No. 4 sieve. The drain shall extend a minimum of 12 inches beyond the outside edge of the
	footing. The thickness shall be such that the bottom of the drain is not higher than the bottom of the base under the floor, and that the
	top of the drain is not less than 6 inches above the top of the footing. The top of the drain shall be covered with an approved filter
	membrane material. Where a drain tile or perforated pipe is used, the invert of the pipe or tile shall not be higher than the floor
	elevation. The top of joints or top of perforations shall be protected with an approved filter membrane material. The pipe or tile shall be
4	placed on not less than 2" of gravel or crushed stone, and shall be covered with not less than 6" of the same material. Section 1813.5.2
4.	Foundations anchors shall be a minimum of 1/2" in diameter, 7" into the foundation wall, minimum of 12" from corners of foundation and a maximum 6' o.c. between bolts. (Section 2305.17)
5.	Waterproofing and dampproofing shall be done in accordance with Section 1813.0 of the building code.
6.	Precaution must be taken to protect concrete from freezing. Section 1908.0
7.	It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify
	that the proper setbacks are maintained.
8.	Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent
	interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area
	by means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the
	garage side. (Chapter 4, Section 407.0 of the BOCA/1996)
¥9.	All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National
	Mechanical Code/1993). Chapter 12 & NFPA 211
10.	Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the City's Building
×	Code.
<b>X</b> 11.	Guardrails & Handrails: A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use
	Groups 42", except Use Group R which is 36". In occupancies in Use Group A, B, H-4, I-1, I-2, M and R and public garages and open
	parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through
	any opening. Guards shall not have an ornamental pattern that would provide a ladder effect. (Handrails shall be a minimum of 3e4" but
	not more than 38". Use Group R-3 shall not be less than 30", but not more than 38".) Handrail grip size shall have a circular cross section
	with an outside diameter of at least 1 1/4" and not greater than 2". (Sections 1021 & 1022.0) - Handrails shall be on both sides of
Y 12	stairway. (Section 1014.7)
¥ 12. ×13.	Headroom in habitable space is a minimum of 7'6". (Section 1204.0) Stair construction in Use Group R-3 & R-4is a minimum of 10" tread and 7 3/4" maximum rise. All other Use Group minimum 11"
A13.	tread, 7" maximum rise. (Section 1014.0)
14.	The minimum headroom in all parts of a stairway shall not be less than 80 inches. (6'8") 1014.4
15.	Every sleeping room below the fourth story in buildings of Use Groups R and I-1 shall have at least one operable window or exterior door
	approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate
	tools. Where windows are provided as means of cgress or rescue they shall have a sill height not more than 44 inches (1118mm) above
	the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches (610mm). The minimum net clear opening width dimension shall be 20 inches (508mm), and a minimum net clear opening of 5.7 sq. ft.
	(Stomm). The minimum net clear opening width dimension shall be 20 menes (Soomm), and a minimum net clear opening of 5.7 sq. it. (Section 1018.6)
16.	Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it exits

 Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it exits directly from the apartment to the building exterior with no communications to other apartment units. (Section 1010.1)

	All vertical openings shall be enclosed with construction having a fire rating of at least one (1) hour, including fire doors with self
	closer's. (Over 3 stories in height requirements for fire rating is two (2) hours.) (Section 710.0)
	The boiler shall be protected by enclosing with (1)hour fire rated construction including fire doors and ceiling, or by providing automatic
	extinguishment. (Table 302.1.1)
	All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of
	the City's Building Code Chapter 9, Section 920.3.2 (BOCA National Building Code/1996), and NFPA 101 Chapter 18 & 19. (Smoke
	detectors shall be installed and maintained at the following locations):
	<ul> <li>In the immediate vicinity of bedrooms</li> </ul>
	In all bedrooms
	<ul> <li>In each story within a dwelling unit, including basements</li> </ul>
	In addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and I-1 shall
	receive power from a battery when the AC primary power source is interrupted. (Interconnection is required) Section 920.3.2.
	A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved
	type. (Section 921.0)
	The Fire Alarm System shall maintained to NFPA #72 Standard.
	The Sprinkler System shall maintained to NFPA #13 Standard.
	All exit signs, lights and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023.0 & 1024.0
	of the City's Building Code. (The BOCA National Building Code/1996)
	Section 25-135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open
	any street or sidewalk from the time of November 15 of each year to April 15 of the following year".
	The builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a certification
	from a design professional that the plans commencing construction of the facility, the builder shall submit the certification the Division of
	Inspection Services.
	Ventilation shall meet the requirements of Chapter 12 Sections 1210.0 of the City's Building Code. (Crawl spaces & attics).
	All electrical, plumbing and HVAC permits must be obtained by a Master Licensed holders of their trade. No closing in of walls until
	all electrical (min.72 hours notice) and plumbing inspections have been done.
	All requirements must be met before a final Certificate of Occupancy is issued.
	All building elements shall meet the fastening schedule as per Table 2305.2 of the City's Building Code (the BOCA National Building
	Code/1996).
	Ventilation of spaces within a building shall be done in accordance with the City's Mechanical Code (The BOCA National Mechanical)
	Please read and implement the attached Land Use Zoning report requirements. Sep. perm T1-g. or New Sim A
	Code/1993). (Chapter M-16) Please read and implement the attached Land Use Zoning report requirements. Sep. permit Neg. or New Sign Ar Boring, cutting and notching shall be done in accordance with Sections 2305.4.4, 2305.5.1 and 2305.5.3 of the City's Building Code.
	Glass and glazing shall meet the requirements of Chapter 24 of the building code.
	All signage, shall be done in accordance with Section 3102.0 signs of the City's Building Code. (The BOCA National Building Code
	1996). Will reguirs permit.
M	
4	Hoffses, Building Inspector
auc	Lt. McDougall, PFD
	Marge Schmuckal, Zoning Administrator $\mathcal{H}_{\mathcal{H}}$
199	

separate approval.

Type Foundation: Framing: Plumbing: Final: Other:		any or E	a hours
Date			*