City of Portland, Maine - Building or Use Permit Application 389 Congress Street, 04101, Tel: (207) 874-8703, FAX: 874-8716

Location of Construction:	Owner: Equitable Life Ann		Phone:	Permit No:
Owner Address:	Lessee/Buyer's Name:		BusinessName:	990756
Contractor Name:	Address:	Permit Issued: SUED		
Past Use:	Proposed Use:	COST OF WORK: \$ 13,200.00	PERMIT FEE: \$ 198.00	JUL 1 ,6 1999
Office	Same	FIRE DEPT. □ App □ Den Signature:		Zone: CBL:
Proposed Project Description:			IVITIES DISTRICT (P.A.D.)	Zoning Approval:
build wall for new computer Toom			proved with Conditions:	Special Zone or Reviews: Shoreland Wetland Flood Zone
		Signature:	Date:	□Subdivision
Permit Taken By:	Date Applied For:	99 K.		☐ Site Plan maj ☐minor ☐mm ☐
 This permit application does not preclude the Building permits do not include plumbing, see Building permits are void if work is not started tion may invalidate a building permit and sto 	☐ Variance ☐ Miscellaneous ☐ Conditional Use ☐ Interpretation ☐ Approved ☐ Denied			
		W	PERMIT ISSUED ITH REQUIREMENTS	Historic Preservation ☐ Not in District or Landmark ☐ Does Not Require Review ☐ Requires Review Action:
I hereby certify that I am the owner of record of the authorized by the owner to make this application a if a permit for work described in the application is areas covered by such permit at any reasonable ho	n, Denied			
		19 14, 1999		
SIGNATURE OF APPLICANT	ADDRESS:	DATE:	PHONE:	
RESPONSIBLE PERSON IN CHARGE OF WOR	K, TITLE		PHONE:	CEO DISTRICT
White-Pe	rmit Desk Green-Assessor's Can	ary-D.P.W. Pink-Public	File Ivory Card-Inspector	

THIS IS NOT A PERMIT/CONSTRUCTION CANNOT COMMENCE UNTIL THE PERMIT IS ISSUED

Building or Use Permit Pre-Application Attached Single Family Dwellings/Two-Family Dwelling

Multi-Family or Commercial Structures and Additions Thereto

In the interest of processing your application in the quickest possible manner, please complete the Information below for a Building or Use Permit.

NOTE**If you or the property owner owes real estate or personal property taxes or user charges on ANY PROPERTY within the City, payment arrangements must be made before permits of any kind are accepted.

Location/Addressof Construction (include Portion of Building):	2 Monume	nt Square	Floor:	Suite:		
Total Square Footage of Proposed Renovation:		Square Footage of L	ot 26924sf	(bldg=11	.9,442)	
Tax Assessor's Chart, Block & Lot Number Chart# 032 Block# K Lot#001	Owner: Equit	able Life	Assurance	Telephone#: (207)8	374-0397	
Owner's Address: 2 Monument Square Portland ME 04101 Lessee/Buyer's Name (If Applicable) Sapient Corp.				Cost Of Work: \$ /3,200		
Proposed Project Description: (Please be as specific as possible) Build wall for New Computer Non						
Contractor's Name, Address & Telephone Orea gon 907-657-	6353	y 106 W	er:11672 G	rey, m539	Rec'd By	
Current Use: Office		Proposed Use:	Office			
Separate permits are required for Internal & External Plumbing, HVAC and Electrical installation. •All construction must be conducted in compliance with the 1996 B.O.C.A. Building Code as amended by Section 6-Art II. •All plumbing must be conducted in compliance with the State of Maine Plumbing Code. •All Electrical Installation must comply with the 1996 National Electrical Code as amended by Section 6-Art III. •HVAC(Heating, Ventililation and Air Conditioning) installation must comply with the 1993 BOCA Mechanical Code. You must Include the following with you application: 1) ACopy of Your Deed or Purchase and Sale Agreement 2) A Copy of your Construction Contract, if available 3) A Plot Plan/Site Plan Minor or Major site plan review will be required for the above proposed projects. The attached checklist outlines the minimum standards for a site plan.						
checklist outlines the minimum standards for a site plan.						

4) Building Plans

Unless exempted by State Law, construction documents must be designed by a registered design professional.

A complete set of construction drawings showing all of the following elements of construction:


- Cross Sections w/Framing details (including porches, decks w/ railings, and accessory structures)
- Floor Plans & Elevations
- Window and door schedules
- Foundation plans with required drainage and dampproofing
- Electrical and plumbing layout. Mechanical drawings for any specialized equipment such as furnaces, chimneys, gas equipment, HVAC equipment (air handling) or other types of work that may require special review must be included.


Certification

I hereby certify that I am the Owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his/her authorized agent. I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in this application is issued, I certify that the Code Official's authorized representative shall have the authority to enter all areas covered by this permit at any reasonable hour to

enforce the provisions of the codes applicable to this permit	
Signature of applicant: Carl & Vagan	Date: 7/14/99
Building Permit Fee: \$25.00 for the 1st \$1000.cost plus \$5.	.00 per \$1,000.00 construction cost thereafter.

Additional Site review and related fees are attached on a separate addendum

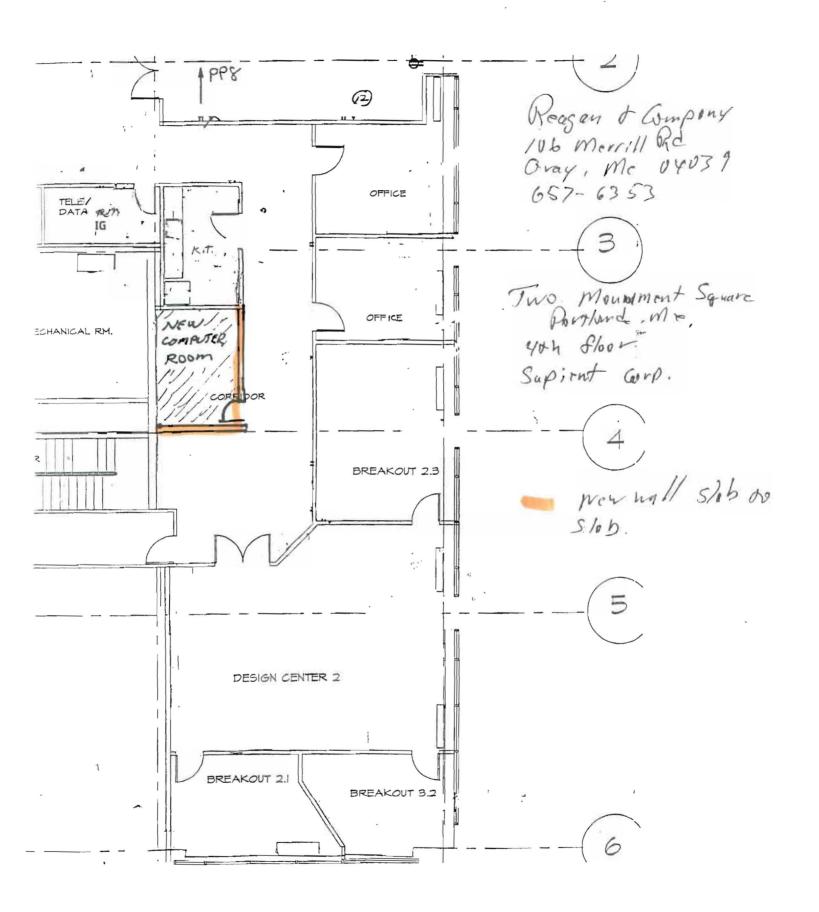

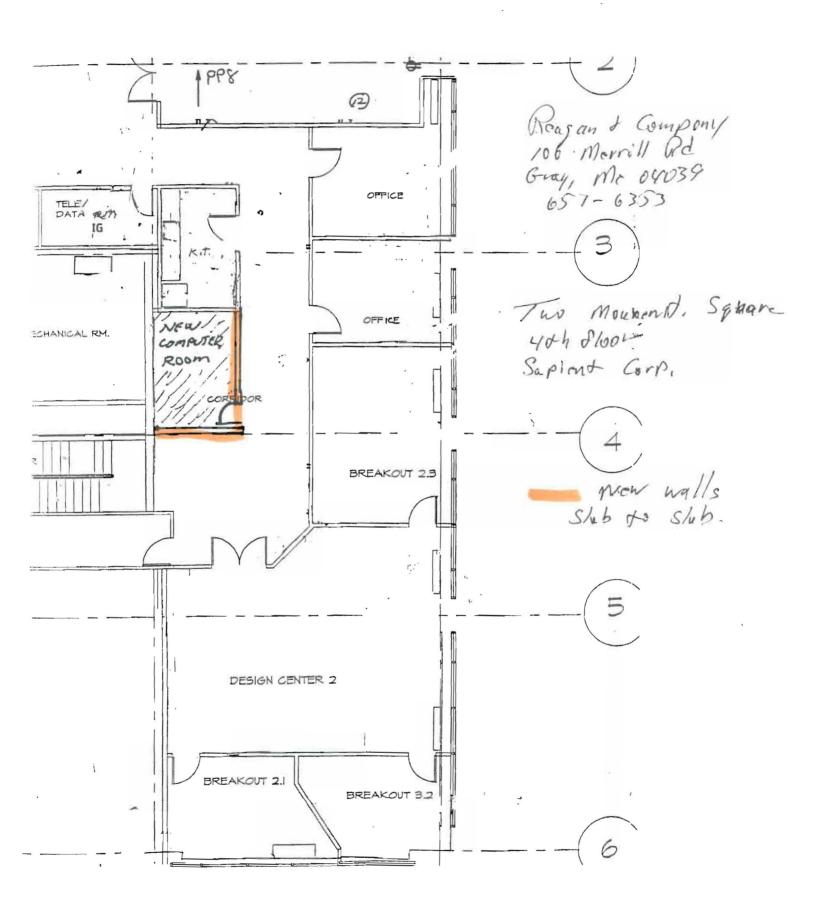

	BUILDING PERMIT REPORT
5 .11	TE: 7/15/59 ADDRESS: 2 Monument Sq. " CBL: 632-16-001
	ASON FOR PERMIT: renovitions
BUI	IDINGOWNER: Equitable 1:16 Assurance
PEF	RMIT APPLICANT:
USE	GROUP BOCA 1996 CONSTRUCTION TYPE
	CONDITION(S) OF APPROVAL
	permit is being issued with the understanding that the following conditions are met:
Ann	roved with the following conditions: #1 17, 20, 21, 22, 23, 27, 28, 29, 30, 32, 33
<i>را</i> ب 2.	This permit does not excuse the applicant from meeting applicable State and Federal rules and laws. Before concrete for foundation is placed, approvals from the Development Review Coordinator and Inspection Services must be obtained. (A
2.	24 hour notice is required prior to inspection)
3.	Foundation drain shall be placed around the perimeter of a foundation that consists of gravel or crushed stone containing not more than 10
	percent material that passes through a No. 4 sieve. The drain shall extend a minimum of 12 inches beyond the outside edge of the footing. The thickness shall be such that the bottom of the drain is not higher than the bottom of the base under the floor, and that the top of the drain is not
	less than 6 inches above the top of the footing. The top of the drain shall be covered with an approved filter membrane material. Where a drain
	tile or perforated pipe is used, the invert of the pipe or tile shall not be higher than the floor elevation. The top of joints or top of perforations
	shall be protected with an approved filter membrane material. The pipe or tile shall be placed on not less than 2" of gravel or crushed stone, and shall be covered with not less than 6" of the same material. Section 1813.5.2
4,	Foundations anchors shall be a minimum of 1/2" in diameter, 7" into the foundation wall, minimum of 12" from comers of foundation and a
	maximum 6' o.c. between bolts. (Section 2305.17)
5.	Waterproofing and dampproofing shall be done in accordance with Section 1813.0 of the building code. Precaution must be taken to protect concrete from freezing. Section 1908.0
6. 7.	It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify that the
	proper setbacks are maintained.
8.	Pnvate garages located <u>beneath habitable rooms</u> in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. <u>Private garages attached</u>
	- side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of 1/2 inch
	gypsum board or the equivalent applied to the garage means of 1/2 inch gypsum board or the equivalent applied to the garage side. (Chapter 4,
0	Section 407.0 of the BOCA/1996) All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National Mechanical
9.	Code/1993). Chapter 12 & NFPA 211
10.	Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the City's Building Code.
11.	Guardrails & Handrails: A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the
	purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42", except Use Group R which is 36". In occupancies in Use Group A, B, H-4, I-1, I-2, M and R and public garages and open parking structures,
	open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall
	not have an ornamental pattern that would provide a ladder effect. (Handrails shall be a minimum of 3e4" but not more than 38". Use Group R-
	3 shall not be less than 30", but not more than 38".) Handrail grip size shall have a circular cross section with an outside diameter of at least 1 W" and not greater than 2". (Sections 1021 & 1022.0) - Handrails shall be on both sides of stairway. (Section 1014.7)
12.	Headroom in habitable space is a minimum of 7'6". (Section 1204.0)
13.	Stair construction in Use Group R-3 & R-4is a minimum of 10" trend and 7 1/2" maximum rise. All other Use Group minimum 11" tread,
14.	7" maximum rise. (Section 1014.0) The minimum headroom in all parts of a stairway shall not be less than 80 inches. (6'8") 1014.4
15.	Every sleeping room below the fourth story in buildings of Use Groups R and I-1 shall have at least one operable window or exterior door
	approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate tools. Where windows are provided as means of egress or rescue they shall have a sill height not more than 44 inches (1118mm) above the floor. All
	egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches (010mm). The
	minimum net clear opening width dimension shall be 20 inches (508mm), and a minimum net clear opening of 5.7 sq. ft. (Section 1018.0)
16.	Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it exits anced,
17	from the apartment to the building exterior with no communications to other apartment umis. (Section 1010.1) All vertical openings shall be enclosed with construction having a fire rating of at least one (1) hour, including fire doors with self closer's.
17.	(Ours.) define in height requirements for fire rating is two (2) hours.) (Section 710.0)
	Eyess Corridors 5 hall be Im lated The boiler shall be protected by enclosing with (1) hour fire rated construction including fire doors and ceiling, or by providing automatic
18.	The boiler shall be protected by enclosing with (1) nour fire fated construction including fire tools and contag, or by provide the fated construction including fire tools and contag, or by providing the fated construction including fire tools and contag, or by providing the fated construction including fire tools and contag, or by providing the fated construction including the fated contag, or by providing the fated contage and the fat
19.	extinguishment. (Table 302.1.1) All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City's All single and multiple station smoke detectors shall be a control of the City's Control of Control of Section 920.3.2 (BOCA National Building Code/1996), and NFPA 101 Chapter 18 & 19. (Smoke detectors shall be

19.

ins	talled and maintained at the following locations):
•	In the immediate vicinity of bedrooms
•	In all bedrooms
• .	In each story within a dwelling unit, including basements
	addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and I-1 shall receive ver from a battery when the AC primary power source is interrupted. (Interconnection is required) Section 920.3.2.
Ap	ortable fire extinguisher shall be located as per NFPA#10. They shall bear the label of an approved agency and be of an approved type.
The	Fire Alarm System shall maintained to NFPA #72 Standard.
The	Sprinkler System shall maintained to NFPA#13 Standard.
	exit signs, lights and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023.0 & 1024.0 of the Suilding Code. (The BOCA National Building Code/1996)
Sec	tion 25-135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open any et or sidewalk from the time of November 15 of each year to April 15 of the following year".
The desi	builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a certification from a gn professional that the plans commencing construction of the facility, the builder shall submit the certification the Division of Inspection rices.
	tilation shall meet the requirements of Chapter 12 Sections 1210.0 of the City's Building Code. (Crawl spaces & attics).
	lectrical, plumbing and HVAC permits must be obtained by a Master Licensed holders of their trade. No closing in of walls until all
elec	trical (min. 72 hours notice) and plumbing inspections have been done.
	equirements must be met before a final Certificate of Occupancy is issued.
	wilding elements shall meet the fastening schedule as per Table 2305.2 of the City's Building Code (the BOCA National Building e/1996).
	ilation of spaces within a building shall be done in accordance with the City's Mechanical Code (The BOCA National Mechanical 2/1993). (Chapter M-16)
	se read and implement the attached Land Use Zoning report requirements.
	ng, cutting and notching shall be done in accordance with Sections 2305.4.4, 2305.5.1 and 2305.5.3 of the City's Building Code.
	s and glazing shall meet the requirements of Chapter 24 of the building code.
Hoff	ses, Building Inspector
0.00	

Lt. McDougall, PFD Marge Schmuckal, Zoning Administrator

^{**}On the basis of plans submitted and conditions placed on these plans any deviations shall require a separate approval.

			9/24/55 Final w/ Earle
Type Foundation: Framing: Plumbing: Final: Other:			Earle Reagan (Sold (Sps)
Date			