City of Portland, Maine - Building or Use Permit Application 389 Congress Street, 04101, Tel: (207) 874-8703, FAX: 874-8716 Location of Construction: Owner: Phone: Permit No 9 8 0 7 8 2 20-36 Danforth St J.B. Brown Owner Address: Lessee/Buyer's Name: Phone: BusinessName: 482 Congress St 04101 Permit Issued: Address: Phone: Contractor Name: Monaghan Woodworks, Inc. 155 Palmouth St Ptld, HK 04102 775-2683 JUL 2 | 1998 COST OF WORK: PERMIT FEE: Past Use: Proposed Use: 11,000.00 75.00 FIRE DEPT. Approved INSPECTION: Use Group: Type: ☐ Denied CBL: Zone: Signature: Zoning Approval: Proposed Project Description: PEDESTRIAN ACTIVITIES DISTRICT (P.A.D.) Action: Approved Special Zone or Reviews: 2nd fl Ste 207 Interior Renovations Approved with Conditions: ☐ Shoreland Denied □ Wetland ☐ Flood Zone ☐ Subdivision Signature: Date: ☐ Site Plan maj ☐minor ☐mm ☐ Permit Taken By: Date Applied For: NG 16 July 1998 **Zoning Appeal** □ Variance This permit application does not preclude the Applicant(s) from meeting applicable State and Federal rules. ☐ Miscellaneous Building permits do not include plumbing, septic or electrical work. ☐ Conditional Use Building permits are void if work is not started within six (6) months of the date of issuance. False informa-☐ Interpretation □ Approved tion may invalidate a building permit and stop all work... ☐ Denied Historic Preservation □ Not in District or Landmark PERMIT ISSUED ☐ Does Not Require Review WITH REQUIREMENTS ☐ Requires Review Action: CERTIFICATION ☐ Appoved ☐ Approved with Conditions I hereby certify that I am the owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been ☐ Denied authorized by the owner to make this application as his authorized agent and I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in the application is issued, I certify that the code official's authorized representative shall have the authority to enter all Date: areas covered by such permit at any reasonable hour to enforce the provisions of the code(s) applicable to such permit 17 July 1998 SIGNATURE OF APPLICANT ADDRESS: PHONE: RESPONSIBLE PERSON IN CHARGE OF WORK, TITLE PHONE: CEO DISTRICT

White-Permit Desk Green-Assessor's Canary-D.P.W. Pink-Public File Ivory Card-Inspector

THIS IS NOT A PERMIT/CONSTRUCTION CANNOT COMMENCE UNTIL THE PERMIT IS ISSUED

Building or Use Permit Pre-Application Attached Single Family Dwellings/Two-Family Dwelling Multi-Family or Commercial Structures and Additions Thereto

In the interest of processing your application in the quickest possible manner, please complete the Information below for a Building or Use Permit.

NOTE**If you or the property owner owes real estate or personal property taxes or user charges on ANY PROPERTY within the City, payment arrangements must be made before permits of any kind are accepted.

| Location/Addressof Construction (include Portion of Building) | 20-36- DANFORTH ST. | 2 Ny FL. SU. 307 |
|--|---|--|
| Total Square Footage of Proposed Structure NA | Square Footage of Lot | |
| Tax Assessor's Chart, Block & Lot Number | Owner: JB BROWN ESON | Telephone#: |
| Chart# 040 Block# D Lot# 001 | OC CHILD . | |
| Owner's Address: J.B. BLOWN + SON 482 CONGLEGS ST POLILOND, ME 04/02 | Lessee/Buyer's Name (If Applicable) | Cost Of Work: Fee \$ 11,000 \$ 75 |
| Proposed Project Description:(Please be as specific as possible) | | |
| OFFICE TO OFFICE , VM. Contractor's Name, Address & Telephone | 155 FALMOUTH ST | Rec'd By |
| MONAGHAN WOODWORKS | INC. POLILAND, ME | 775-2683 |
| Current Use: 6FFICK | Proposed Use: O PFIL | 165 |
| •All construction must be conducted in complia •All plumbing must be conducted of the condu | cted in compliance with the State of Main- ith the 1996 National Electrical Code as a itioning) installation must comply with the cour Deed or Purchase and Sale Agreement f your Construction Contract, if available 3) A Plot Plan/Site Plan | de as amended by Section 6-Art II e Plumbing Code. amended by Section 6-Art III. ne 1993 BOCA Mechanical Code. |
| checklist outlines the minimum standards for a site p | | JUL 1 0 1996 |
| | Building Plans tion documents must be designed by a re | L. C. S. J. W. S. |
| A complete set of construction drawings showing all | | guster en design professionar |
| | ng porches, decks w/ railings, and accessory | structures) |
| Floor Plans & Elevations | | error of historia in |
| Window and door schedules | | |
| Foundation plans with required drainage a | and dampproofing | |
| | al drawings for any specialized equipment si | uch as furnaces chimmous cos |

equipment, HVAC equipment (air handling) or other types of work that may require special review must be included.


Certification

I hereby certify that I am the Owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his/her authorized agent. I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in this application is issued, I certify that the Code Official's authorized representative shall have the authority to enter all areas covered by this permit at any reasonable hour to enforce the provisions of the codes applicable to this permit.

| Signature of applicant: M In all | Date: 7/16/98 | |
|----------------------------------|---------------|--|
|----------------------------------|---------------|--|

Building Permit Fee: \$25.00 for the 1st \$1000.cost plus \$5.00 per \$1,000.00 construction cost thereafter.

Additional Site review and related fees are attached on a separate addendum

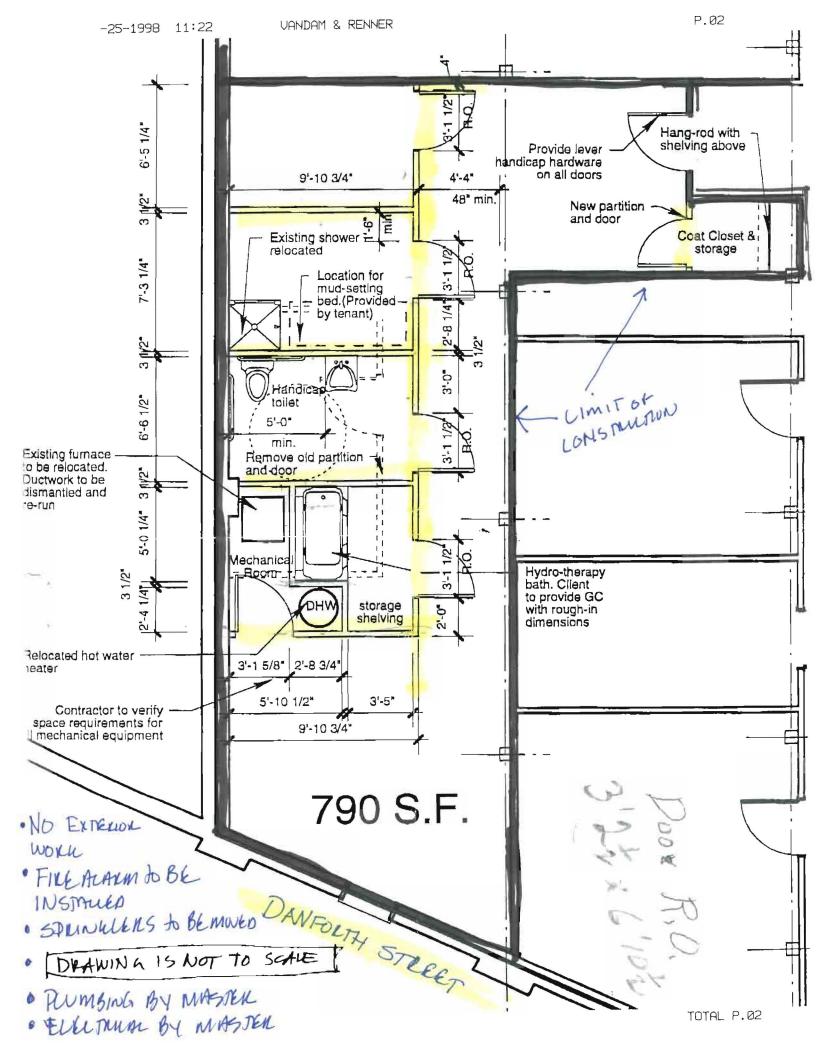

BUILDING PERMIT REPORT

| DATE:_ | 7/20/28 ADDRESS: 20-36 Don Forth & | |
|-----------|---|--|
| REASO | N FOR PERMIT: Remark true. | |
| BUILDI | NG OWNER: JB Brown | |
| CONTR | ACTOR: Mininghon willington | |
| PERMI | T APPLICANT: | |
| USE GR | OUPBOCA 1996 CONSTRUCTION TYPE | |
| | CONDITION(S) OF APPROVAL | |
| This Pe | rmit is being issued with the understanding that the following conditions are met: | |
| Approv | ed with the following conditions: * *9 *12 *18 *19 *20, *24 *26 *27 | |
| ન. | This permit does not excuse the applicant from meeting applicable State and Federal rules and laws. | |
| 2. | Before concrete for foundation is placed, approvals from the Development Review Coordinator and Inspection Services | |
| | must be obtained. (A 24 hour notice is required prior to inspection) | |
| 2.5 | Foundation drain shall be placed around the perimeter of a foundation that consists of gravel or crushed stone containing | |
| | not more than 10 percent material that passes through a No. 4 sieve. The drain shall extend a minimum of 12 inches | |
| | beyond the outside edge of the footing. The thickness shall be such that the bottom of the drain is not higher than the bottom of the base under the floor, and that the top of the drain is not less than 6 inches above the top of the footing. The | |
| | top of the drain shall be covered with an approved filter membrane material. Where a drain tile or perforated pipe is used, | |
| | the invert of the pipe or tile shall not be lugher than the floor elevation. The top of joints or top of perforations shall be | |
| | protected with an approved filter membrane material. The pipe or tile shall be placed on not less than 2" of gravel or | |
| | crushed stone, and shail be covered with not less than 6" of the same material. | |
| 3. | Precaution must be taken to protect concrete from freezing. | |
| 4. | It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify that the proper setbacks are maintained. | |
| 5. | Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from | |
| | adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire | |
| | resisting rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated from | |
| | the interior spaces and the attic area by means of ½ inch gypsum board or the equivalent applied to the garage means of ½ | |
| | inch gypsum board or the equivalent applied to the garage side. (Chapter 4 Section 407.0 of the BOCA/1996) | |
| 6. | All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA | |
| _ | National Mechanical Code/1993). | |
| 7. | Sound transmission control in residential building shall be done in accordance with Chapter 12 section 1214.0 of the city's building code. | |
| 8. | Guardrails & Handrails: A guardrail system is a system of building components located near the open sides of elevated | |
| 0. | walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower | |
| | level. Minimum height all Use Groups 42", except Use Group R which is 36" In occupancies in Use Group A, B, H-4, I- | |
| | 1. I-2 M and R and public garages and open parking structures, open guards shall have balusters or be of solid material such | |
| | that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that | |
| | would provide a ladder effect. (Handrails shall be a minimum of 34" but not more than 38". Use Group R-3 shall not be | |
| | less than 30", but not more than 38".) Handrail grip size shall have a circular cross section with an outside diameter of at | |
| | least I 1/4" and not greater than 2". | |
| 9) 10. | Headroom in habitable space is a minimum of 7'6". Stair construction in Use Group R-3 & R-4 is a minimum of 10" tread and 7 3/4" maximum rise. All other Use group | |
| 10. | minimum 11" tread. 7" maximum rise. | |
| 11. | The minimum headroom in all parts of a stairway shall not be less than 80 inches. (6' 8") | |
| 12. | Every sleeping room below the fourth story in buildings of use Groups R and I-1 shall have at least one operable window or exterior door approved for emergency egress or rescue. The units must be operable from the inside without the use of | |

special knowledge or separate tools. Where windows are provided as means of egress or rescue they shall have a sill height not more than 44 inches (1118mm) above the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches (610mm). The minimum net clear opening width dimension

| | If be 20 inches (508mm), and a minimum net clear opening of 5.7 sq. ft. The apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable |
|------------|--|
| wh | en it exits directly from the apartment to the building exterior with no communications to other apartment units. |
| | vertical openings shall be enclosed with construction having a fire rating of at lest one (1)hour, including fire doors with closer's. (Over 3 stories in height requirements for fire rating is two (2) hours.) |
| Th | boiler shall be protected by enclosing with (1) hour fire-rated construction including fire doors and ceiling, or by viding automatic extinguishment. |
| pro | single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the visions of the City's Building Code Chapter 9, Section 19, 920.3.2 (BOCA National Building Code/1996), and NFPA Chapter 18 & 19 (Smoke detectors shall be installed and maintained at the following locations): In the immediate vicinity of bedrooms In all bedrooms |
| | In each story within a dwelling unit, including basements |
| 1-1 A F | addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and shall receive power from a battery when the AC primary power source is interrupted. (Interconnection is required) ortable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of a roved type. |
| | e Fire Alarm System shall be maintained to NFPA #72 Standard. |
| | Sprinkler System shall maintained to NFPA #13 Standard. |
| | exit signs, lights, and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 3 & 1024. Of the City's building code. (The EOCA National Building Code/1996) |
| exc The | tion 25-135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to avate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year", shullder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a diffication from a design professional that the plans commencing construction of the facility, the builder shall submit the iffication to the Division of Inspection Services. |
| Ver | atilation shall meet the requirements of Chapter 12 Sections 1210. Of the City's Building Code. (crawl spaces & attics) electrical, plumbing and HVAC permits must be obtained by a Master Licensed holders of their trade. |
| | requirements must be met before a final Certificate of Occupancy is issued. |
| All | building elements shall meet the fastening schedule as per Table 2305.2 of the City's Building Code. (The BOCA ional Building Code/1996). |
| Ver | tilation of spaces within a building shall be done in accordance with the City's Mechanical Code (The BOCA National chanical Code/1993). |
| | ase read and implement the attached Land Use-Zoning report requirements. |
| | |
| | |
| | |
| | |
| _ | |
| | |
| | |

P. Samuel Hottses, Building Inspector

CC: Lt. McDougall, PFD

Marge Schmuckal