NOTE:

1. C.M./G.C. & ALL SUBCONTRACTORS BIDDING ON PROJECT MUST VISIT & EXAMINE EXISTING SITE & WILL BE RESPONSIBLE FOR BECOMING FAMILIAR WITH FIELD CONDITIONS. ANY FIELD CONDITIONS WHICH CONTRADICT INFORMATION AS DEPICTED ON PLANS SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT PRIOR TO COMMENCEMENT OF WORK. (NO EXCLUSIONS ACCEPTED)

2. THE C.M./G.C. WILL BE RESPONSIBLE FOR THE COORDINATION OF ARCHITECTURAL, MEP, ACOUSTICAL, COMPARTMENTATION RATING, A/V AND SECURITY PACKAGE, FURNITURE VENDOR, ETC. (ENTIRE PACKAGE & SPEC.) W/ ALL SUB-CONTRACTORS. THE C.M./G.C. WILL HAVE MEETINGS AS NEEDED W/ ALL TRADES AND MAKE SURE ALL TRADES COME TOGETHER IN-ORDER TO MEET DESIGN INTENT AS AND ENTIRE PACKAGE INCLUDING A/V AND SECURITY PACKAGES (ERRORS OF COORDINATING WILL BE CORRECTED BY THE C.M./G.C. AT THEIR COST FOR ALL TRADES). NO EXCLUSIONS ACCEPTED.

3. C.M./G.C. TO SECURE ALL BUILDING DEPARTMENT (ETC.) PERMITS IN ORDER TO START CONSTRUCTION (NO EXCLUSIONS ACCEPTED).

4. C.M./G.C. WILL PROTECT CONSTRUCTION FROM START TO FINISH AS REQUIRED (THROUGHOUT THE ENTIRE SPACE) FROM ALL TRADES INCLUDING FURNITURE VENDOR UNTIL SPACE IS TURNED OVER TO OWNER. (ALL DAMAGES DONE PRIOR, WILL BE CORRECTED OR REPLACED AS REQUIRED AT C.M./G.C. COST) NO EXCLUSIONS ACCEPTED.

5. C.M./G.C. MUST BID THE ENTIRE PACKAGE (CONTRACT DOCUMENT & SPECIFICATIONS) AS A WHOLE PACKAGE, NO EXCLUSIONS ACCEPTED. MEET CONSTRUCTION SCHEDULE. THE ONLY EXCLUSIONS ACCEPTED IS SIGNAGE, ASBESTOS REMOVAL, ELEVATOR CHARGES OR OTHERWISE CLEARLY NOTED ON DRAWINGS (NO EXCLUSIONS ACCEPTED).

6. C.M./G.C. & ALL SUBCONTRACTORS BIDDING ON THE PROJECT MUST EXAMINE EXTING CONDITIONS AT ALL AREAS AFFECTED BY NEW WORK (BEFORE SUBMITTING BIDS) C.M./G.C. IS TO INCLUDE ALL WORK AS REQUIRED AND NECESSARY TO MODIFY, RELOCATE AND/OR REPLACE AS NECY. (EXISTING CONDITIONS) ARCHITECTURAL, STRUCTURAL, MEP ETC. IN ORDER TO MEET DESIGN INTENT 100% PER CONTRACT DOCUMENT AND SPECIFICATIONS. (ALSO MEET MIN. CODE, ADA. BUILDING STANDARD ETC.) THE C.M./G.C. SHALL INCLUDE ALL FIELD CONDITIONS AS NOTED ABOVE SO, THERE WILL NOT BE CHANGE ORDERS ON THE ENTIRE SCOPE OF THE PROJECT REGARDING FIELD CONDITIONS. THE ONLY CHANGE-ORDERS ACCEPTED ARE CLIENT DESIGN CHANGES (AFTER BID IS SUBMITTED AND APPROVED) FROM THE BID SET (CONTRACT DOCUMENT & SPEC.) NOT FIELD CONDITIONS (NO EXCLUSIONS ACCEPTED).

7. C.M./G.C. WILL SUBMIT SHOP DRAWINGS AND RECEIVE APPROVAL FROM TMA AND CONSULTANT ENGINEER (AS REQUIRED) BEFORE INDIVIDUAL TRADE (TYPE) SCOPE OF WORK CAN COMMENCE. C.M./G.C./SUBCONTRACTORS WORKING OR FABRICATING WITHOUT APPROVED SHOP DRAWING IS AT THE RISK OF C.M./G.C./SUBCONTRACTORS, AND WILL MAKE CORRECTIONS AS REQUIRED AT C.M./G.C./SUBCONTRACTORS COST NO EXCEPTION. ALSO C.M./G.C./SUBCONTRACTORS MUST COMPLY TO ALL NOTES AND COMMENTS MADE ON "APPROVED AS NOTED" SHOP DRAWINGS AND CAT. CUTS. ALL SUBCONTRACTORS ARE RESPONSIBLE TO FIELD VERIFY AND MEET DESIGN INTENT BEFORE SHOP DRAWINGS ARE SUBMITTED TO TMA AND CONSULTANT ENGINEER. IF SUBCONTRACTOR DOES NOT FIELD VERIFY BEFORE SUBMITTING SHOP DRAWINGS (AS APPLY FOR EACH TRADE) IT WILL BE REJECTED AND THE C.M./G.C./SUBCONTRACTOR WILL BE STILL RESPONSIBLE OF MEETING SCHEDULE AT THEIR COST (OVERTIME ETC.). C.M./G.C. TO COORDINATE FIELD VISIT BEFORE PLACING BID FOR ALL TRADES (SUBCONTRACTORS) AND MAKE THIS SCOPE OF WORK PART OF THE BASE CONTRACT. (NO EXCLUSIONS ACCEPTED).

8. C.M./G.C. TO COORDINATE WITH THE SHEET METAL SUBCONTRACTOR A WALK-THROUGH TO EXAMINE EXISTING CONDITIONS BEFORE PLACING BID; THE SHEET METAL SUBCONTRACTOR WILL BE RESPONSIBLE OF MEETING DESIGN INTENT FOR CEILING HEIGHT'S ETC. ALSO WILL INCLUDE ALL NECESSARY COST IN ORDER TO MEET DESIGN INTENT AS REQUIRED. THE SHEET METAL SUBCONTRACTOR WILL COORDINATE THEIR DUCT LAYOUT IN ORDER THAT THERE WILL BE NO LIGHT HITS OTHERWISE THEY WILL MODIFY DUCT AT THEIR COST; ALL THIS SCOPE OF WORK MUST BE INCLUDED IN THE BASE CONTRACT. (NO EXCLUSIONS ACCEPTED).

9. C.M./G.C. MUST COMPLY (100%) TO ALL RULES AND REGULATIONS OF THE BUILDING STANDARDS. C.M./G.C. MUST INCLUDE ALL WORK THAT MUST BE PERFORMED ON OVERTIME PER BUILDING STANDARD. ALSO ALL WORK THAT IS DIRECTED BY THE BUILDING TO BE PERFORMED ON OVERTIME MUST BE INCLUDED ON THE BASE CONTRACT. (NO EXCLUSIONS ACCEPTED).

10. C.M./G.C. WILL BE RESPONSIBLE TO COMPLY TO CONTRACT DOCUMENT (100%) ARCHITECTURAL, STRUCTURAL, MEP & ETC. IF C.M./G.C./SUBCONTRACTORS DEVIATES FROM CONTRACT DOCUMENT AND SPEC. THEY (C.M./G.C.) WILL MODIFY AS REQUIRED IN ORDER TO MEET DESIGN INTENT AT C.M./G.C.'S COST. ALSO IF C.M./G.C./SUBCONTRACTORS SUBMITS SUBSTITUTE CAT. CUTS (ALL TRADES), MECHANICAL UNITS ETC. AND CLIENT, TMA AND ENGINEER APPROVE SUBSTITUTE (CAT. CUTS). C.M./G.C./SUBCONTRACTORS WILL BE RESPONSIBLE FOR FILING ALL AMENDMENTS IF APPLICABLE WITH DEPARTMENT OF BUILDINGS ETC. AND ALL ASSOCIATED COST IN ORDER TO RECEIVE FINAL SIGN-OFF FROM DEPARTMENT OF BUILDING ETC. THIS SCOPE OF WORK MUST BE INCLUDED PART OF THE BASE CONTRACT. (NO EXCLUSIONS ACCEPTED).

11. C.M. (CONSTRUCTION MANAGER) WILL REVIEW ALL CONSTRUCTION DOCUMENT, SPEC., BUILDING STANDARDS & ETC. DURING BIDDING PHASE AND MAKE SURE THAT ALL SCOPE OF WORK IS INCLUDED IN ORDER TO MEET DESIGN INTENT AND FIELD CONDITIONS. THE C.M. WILL NOTIFY THE ARCHITECT (TMA) IN WRITTEN FORMAT OF ALL ITEMS THAT NEEDS TO BE INCLUDED; THAT COULD OR/WILL RESULT IN CHANGE ORDERS (INCLUDING FIELD CONDITIONS). NO EXCLUSIONS ACCEPTED.

12. PATCH FLOOR, WALLS AND CEILING AS REQUIRED FOR THE ENTIRE FLOOR AND THE ENTIRE FLOOR (ALL WORK BELOW TO BE DONE ON OVERTIME) BELOW TO MATCH EXISTING 100% IN FINISHES, MATERIALS ETC. DUE TO NEW MEP, STRUCTURAL ETC. SCOPE OF WORK. FOR MORE INFORMATION SEE MEP DRAWINGS ETC. AND EXAMINE EXISTING FILED CONDITION BEFORE PLACING BIDS. C.M./G.C. TO COORDINATE FIELD VISIT BEFORE PLACING BIDS FOR ALL TRADES (SUBCONTRACTORS) AND MAKE THIS SCOPE OF WORK PART OF THE BASE CONTRACT. (NO EXCLUSIONS ACCEPTED).

13. ALL FIELD CONDITIONS ETC. THE G.C MUST NOTIFY TMA IN RFI (REQUEST FOR INFORMATION) FORMAT ONLY. IF C.M./G.C. DOES NOT NOTIFY TMA OF FIELD CONDITIONS. (RFI FORMAT ONLY). THE C.M./G.C. IS TAKING A RISK AND WILL BE RESPONSIBLE OF MEETING DESIGN INTENT 100% NO EXCEPTION. C.M./G.C. NOT MEETING DESIGN INTENT THE C.M./G.C. WILL UNDUE (OR ISSUE CREDIT IF CLIENT ACCEPTS) AND RECONSTRUCT @ C.M./G.C. COST IN-ORDER TO MEET DESIGN INTENT 100% (ALL WORK TO BE PERFORMED ON OVERTIME). NO EXCLUSION ACCEPTED.

14. RESET ALL DEVICES STROBE HORN, ELEVATOR CALL BOTTOM, ELEVATOR INDICATOR, FIRE ALARM DEVICES, EXIT SIGNS, SIGNAGE, CARD READER AND MEP DEVICES DUE TO NEW SCOPE OF WORK TO ALIGN W/ NEW SURFACE (FURR-OUT WALL ETC.,) FOR THE ENTIRE PROJECT. G.C. SUB'S TO V.I.F. BEFORE PLACING BID AND MAKE THIS SCOPE OF WORK PART OF THE BASE CONTRACT (NO EXCLUSIONS ACCEPTED).

15. ALL CONSTRUCTION DELIVERIES MUST BE BEFORE 8 A.M. OR AFTER 5 P.M. G.C. TO COORDINATE W/ BUILDING ACTUAL TIME, ETC.) ALL CONTRACTORS MUST USE FREIGHT ENTRANCE TO ENTER AND EXIT THE BUILDING. G.C. TO SCHEDULE WITH BUILDING MANAGEMENT FOR THE FREIGHT ELEVATOR HOURS.

16. ALL STRUCTURAL, MEP, LIGHTING, ACOUSTICAL, ETC. SHOP DRAWINGS & RFI'S; C.M./G.C. MUST SENT DIRECTLY TO THE CONSULTANTS AS APPLIED AND C.C. TMA FOR FAST TRACK. (NO EXCLUSIONS ACCEPTED)

17. THE GENERAL CONTRACTOR IS SOLELY RESPONSIBLE FOR THE COORDINATION AND IMPLEMENTATION OF ALL CONTROLLED INSPECTIONS AND MUNICIPAL SIGN-OFFS (i.e.... PLUMBING, SPRINKLER MECHANICAL AND FIRE ALARM) IN AN APPROPRIATE TIME FRAME IN CONJUNCTION WITH THE PROJECT-FILING CONSULTANT. SAID TIME FRAME IS NOT TO EXCEED THREE (3) MONTHS. IF THE ABOVE REQUIREMENT IS NOT SATISFIED WITHIN THE STATED TIME FRAME, THE CLIENT WITH THE ASSISTANCE OF THE ARCHITECT, WILL SUBTRACT FROM THE GENERAL CONTRACTOR'S FINAL REQUISITION, THOSE FEES THAT WILL BE REQUIRED TO OBTAIN SAID SIGN-OFFS BY INDEPENDENT PROFESSIONALS THAT PROVIDE THIS SERVICE. (NO EXCLUSIONS ACCEPTED)

18. ADDENDUM SET MUST BE PART OF THE BASE CONTRACT BASE BID; FAILURE FROM G.C. PART TO INCLUDE ADDENDUM ON BASE BID, THE G.C. WILL STILL BE OBLIGATED TO DUE THE WORK (ALL ADDENDUMS) AT BASE BID DOLLAR AMOUNT (NO EXCLUSIONS ACCEPTED).

19. NOT USED

20. G.C/CM/ALL SUBCONTRACTORS MUST V.I.F. ALL FILED CONDITIONS AND CAN NO EXCLUDE ANY PARTS OR PIECES OF THE CONTRACT DOCUMENT W/O WRITTEN APPROVAL OF THE CLIENT AND ARCHITECT BY THE G.C/CM/ALL SUBCONTRACTORS EXCLUDING PARTS OF PIECES OF THE PROJECT THAT CAN IMPACT MIN. CODE REQUIREMENT, ADA & ETC. IF G.C/CM/ALL SUBCONTRACTORS EXCLUDE ANY ITEM W/O WRITTEN APPROVAL OF THE CLIENT AND ARCHITECT THE DRAWINGS HAVE PRESENTS OVER THE G.C/CM PROPOSAL AND THE G.C/CM IS OBLIGATED TO DO THE WORK AT NO ADDITIONAL COST FROM THE BASE CONTRACT (PROPOSAL) TOTAL AMOUNT. (NO EXCLUSION ACCEPTED)

21. G.C/CM TO BID ENTIRE PACKAGE AS A WHOLE PACKAGE: ARCHITECTURAL, MEP, COMMUNICATION, SECURITY & ETC. PATCH FLOOR, WALLS, CEILINGS & ETC. AS REQUIRED TO MATCH EXISTING FOR THE ENTIRE BUILDING DUE TO NEW SCOPE OF WORK. G.C./SUBCONTRACTORS TO V.I.F. BEFORE SUBMITTING BID AND MAKE THIS SCOPE OF WORK PART OF THE BASE CONTRACT. (NO EXCLUSION ACCEPTED)

22. IF THERE ARE DISCREPANCY ON THE DWGS. OR SPEC. THE C.M./ G.C. MUST BRING TO THE ATTENTION OF THE ARCHITECT IN WRITTEN FORMAT BEFORE PLACING BID. ONCE THE BID HAS BEEN APPROVAL AND THE ISSUE IS NOT BOUGHT UP TO THE ARCHITECT ATTENTION, THE C.M./G.C. HAS BOUGHT AND INCLUDED THE MOST EXPENSIVE SOLUTION. (NO EXCLUSION ACCEPTED)

23. THE C.M./ G.C. WILL BUY THE ENTIRE PROJECT AS A FINISH PRODUCT AND FULLY TURN-KEY INSTALLATION IF PCS. PARTS ARE MISSING. THE C.M./ G.C. WILL INCLUDE IN THEIR BASE BID IN ORDER TO MEET A TURN KEY INSTALLATION OR FULLY FINISHED. ALSO V.I.F. BEFORE PLACING BID AND MAKE THIS SCOPE OF WORK PART OF THE BASE BID. (NO EXCLUSION ACCEPTED)

24. THE TERM USED THROUGHOUT THE ENTIRE ARCHITECTURAL CONTRACT DOCUMENT PACKAGE "NO EXCLUSIONS ACCEPTED" MEANS THAT THE C.M./G.C./SUBCONTRACTORS CAN NOT EXCLUDE THIS PART OF THE WORK; AND MUST BE INCLUDED PART OF THE BASE (PROPOSAL) CONTRACT. C.M./G.C. IS RESPONSIBLE TO EXAMINE EXISTING CONDITIONS WITH ALL SUBCONTRACTORS TO INSURE THAT ALL SCOPE OF WORK IS INCLUDED AND PRICED CORRECTLY FOR BOTH PARTIES (CLIENT AND C.M./G.C.) NO ALLOWANCE ACCEPTED (FIXED DOLLAR AMOUNT ONLY). IF C.M./G.C. SUBMITS PROPOSAL SHOWING EXCLUSIONS ON ITEMS THAT THE ARCHITECTURAL CONTRACT DOCUMENT CLEARLY STATES "NO EXCLUSIONS ACCEPTED" THE DRAWINGS HAVE PRECEDENCE OVER THE C.M./G.C.'S PROPOSAL AND THE C.M./G.C. IS OBLIGED TO DO THE WORK AT NO ADDITIONAL COST FROM THE BASE CONTRACT (PROPOSAL) TOTAL AMOUNT. (NO EXCLUSIONS ACCEPTED)

ABBREVIATIONS

A	
ACCES	ACCESSORY
ACOUS	ACOUSTICAL)
AFF	ABOVE FINISHED FLOOR
AL	ALUMINUM
ALT	ALTERNATE
ANOD	ANODIZED
APPL	APPLIANCE
ARCH	ARCHITECT(URAL)
AUTO	AUTOMATIC
AVG	AVERAGE
&	AND
B	
BLDG	BUILDING
BD	BOARD
BLKG	BLOCKING
BRDLM	BROADLOOM
BU	BUILT UP
C	
CAB	CABINET
CPT	CARPET
CEM	CEMENT(ITIOUS)
CER	CERAMIC
CLG	CEILING
COATG	COATING
CM	CONSTRUCTION MANAGER
COL'G	COILING
CONC	CONCRETE
CONSTR	CONSTRUCTION
CONT	CONTINUOUS(ATION)
CONTR	CONTRACT(OR)
COV	COVER
CMU	CONCRETE MASONRY UNIT
D	
DBL	DOUBLE
DEPT	DEPARTMENT
DES	DESIGN(ED)
DET	DETAIL
DF	DRINKING FOUNTAIN
DIA	DIAMETER
DIFF	DIFFUSER
DIM	DIMENSION
DISP	DISPENSER
DIV	DIVISION
DN	DOWN
DR	DOOR
DSCON	DISCONNECT
DWR	DRAWER
E	
ELAST	ELASTOMERIC
ELEC	ELECTRICAL
EMBED	EMBEDD(ED)(ING)
ENG	ENGINEER
ENTR	ENTRANCE
EQ	EQUAL
EQUIP	EQUIPMENT
ETC	ETCETERA
EXIST	EXISTING
EXPS	EXPOSE(D)
EXT	EXTERIOR
F	
FAB	FABRICATION
FD	FLOOR DRAIN
FE	FIRE EXTINGUISHER
FEC	FIRE EXTINGUISHER CABINET
FHC	FIRE HOSE CABINET
FIN	FINISH
FLDG	FOLDING
FPLC	FIREPLACE
FR	FIRE RAT(ING)(ED)
FRMG	FRAMING
FXD	FIXED
FXTR	FIXTURE
FLR	FLOOR(ING)
FURN	FURNITURE
FWC	FABRIC WALL COVERING
G	
GA	GAUGE
GC	GENERAL CONTRACTOR
GFRC	GLASS FIBER REINFORCED CONCRETE
GFRG	GLASS FIBER REINFORCED GYPSUM
GFRP	GLASS FIBER REINFORCED PLASTER
GL	GLASS
GR	GRAD(E)(ING)
GYP	GYPSUM
H	
HD	HEAD
HDWD	HARDWOOD
HDWE	HARDWARE
HM	HOLLOW METAL
HORIZ	HORIZONTAL
HVAC	HEATING, VENTILATING, AND AIR CONDITIONING
I	
INFO	INFORMATION
INSTRUM	INSTRUMENT(ATION)
INSUL	INSULATION
INTLK	INTERLOCK(ING)
INT	INTERIOR
INFILTR	INFILTRATION
J	
JAN	JANITOR
K	
KIT	KITCHEN
L	
LAV	LAVATORY
LB	POUND
LT	LIGHT
LVLG	LEVELING
LVR	LOUVER
M	
MAX	MAXIMUM
MFD	MANUFACTURED
MFR	MANUFACTURER
MECH	MECHANICAL
MET	METAL
MEMB	MEMBRANE
MIN	MINIMUM
MISC	MISCELLANEOUS
MLWK	MILLWORK
MOIST	MOISTURE
MOT	MOTOR(IZED)
MTD	MOUNTED
N	
NIC	NOT IN CONTRACT
NO	NUMBER
NTS	NOT TO SCALE
O	
ORNA	ORNAMENTAL
OVFL	OVERFLOW
OVHD	OVERHEAD
OPNG	OPENING(S)
OPR	OPERABLE
P	
PTN	PARTITION
PEDTR	PEDESTRIAN
PBD	PARTICLE BOARD
PNL	PANEL
POLYST	POLYSTYRENE
PORT	PORTABLE
PREFIN	PREFINISHED
PREFAB	PREFABRICATED
PLAM	PLASTIC LAMINATE
PLAS	PLASTER
PLSTC	PLASTIC
PLYWD	PLYWOOD
R	
RDR	READER
RECES	RECESSED
RECPT	RECEPTACLE
REF	REFER(ENCE)
REFL	REFLECTED
REFR	REFRIGERATOR
REQD	REQUIRED
RESIS	RESIST(ANT)(IVE)
REINF	REINFORCE(D)(ING)(MENT)
RESIL	RESILIENT
RFG	ROOFING
RM	ROOM
RO	ROUGH OPENING
S	
SCR	SCRIBE
SECUR	SECURITY
SF	SQUARE FEET
SGL	SINGLE
SHORG	SHORING
SIM	SIMILAR
SST	STAINLESS STEEL
STD	STANDARD
STL	STEEL
STRFR	STOREFRONT
STRUCT	STRUCTURAL
SURF	SURFACE
SUSP	SUSPENDED
SYS	SYSTEM(S)
T	
THK	THICK
TOIL	TOILET
TRAF	TRAFFIC
TRANS	TRANSPARENT
TRTD	TREATED
T&G	TONGUE AND GROOVE
TYP	TYPICAL
TELECOM	TELECOMMUNICATION
U	
UNDRLAY	UNDERLAYMENT
UTIL	UTILITY
UNO	UNLESS NOTED OTHERWISE
V	
VERT	VERTICAL
VIF	VERIFY IN FIELD
W	
W/	WITH
WC	WATER CLOSET
WD	WOOD
WDW	WINDOW
W/O	WITHOUT
WT	WEIGHT
WTRPRF	WATERPROOFING

A.N.S.I. DESIGN STANDARDS



BASE HEIGHT @ SINK

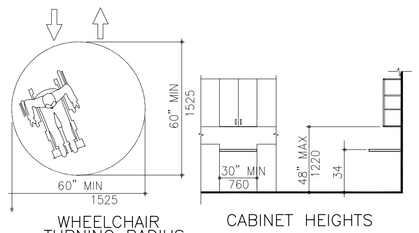

WHEELCHAIR TURNING RADIUS — CABINET HEIGHTS

NOTE: GENERAL CONTRACTOR AND ALL SUB-CONTRACTORS SHALL BECOME FAMILIAR WITH A.N.S.I., ACCESSIBILITY STANDARDS, MINIMUM CLEARANCES AND SHALL INFORM THE ARCHITECT OF ANY AND ALL CONFLICTS WITH COMPLYING WITH THOSE MINIMUM CLEARANCES AND STANDARDS. A.D.A. ACCESSIBILITY STANDARDS AND MINIMUM CLEARANCES ARE INCLUSIVE OF, BUT NOT LIMITED TO, FIGURES SHOWN ABOVE. GENERAL CONTRACTOR AND ALL SUB-CONTRACTORS SHALL REFER TO APPLICABLE LITERATURE (FEDERAL REGISTER, ETC.) FOR ADDITIONAL A.N.S.I. STANDARDS.

ACCESSIBILITY NOTE: MEET ANSI A117.1-1998, CHAPTER 6 FOR DRINKING FOUNTAIN OR WATER COOLER, SECTIONS: 602.1 TO 602.7; CHAPTER 9 FOR WORK SURFACE & SINK, SECTIONS: 902.1 TO 902.4.

TYPICAL MOUNTING HEIGHTS

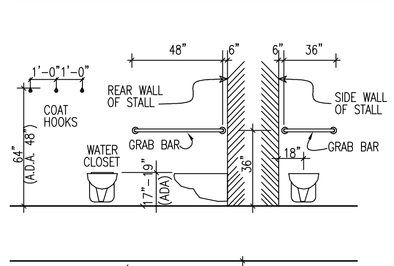

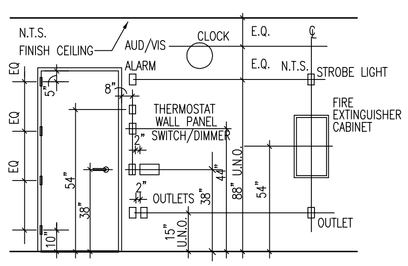

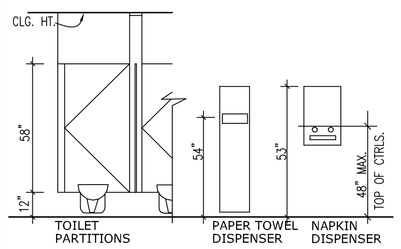

TOILET PARTITIONS — PAPER TOWEL DISPENSER — NAPKIN DISPENSER

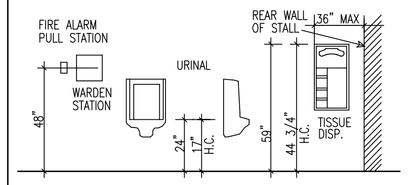

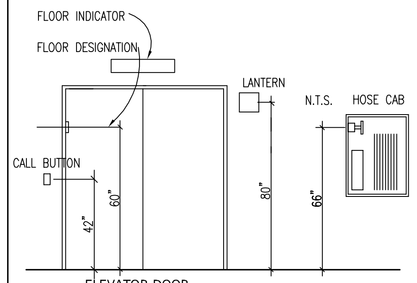

ELEVATOR DOOR



TYP. LOCATION FOR WALL MTD. FIRE ALARM/THERMOSTAT/OUTLETS ABOVE COUNTERS, U.O.N.

NOTE:
THE ABOVE DELINEATED MOUNTING HEIGHTS ARE TYPICAL ONLY. DETAILS MAY SHOW SPECIFIC VARIATIONS FOR SPECIFIC CONDITIONS

UBS

REVISIONS

NO.	DATE	DESCRIPTION
2	07.13.07	ISSUE FOR BID
1	07.13.07	ISSUE FOR PERMIT
	06.26.07	ISSUE FOR CLIENT REVIEW
	06.13.07	ISSUE TO ENGINEER

NO.	DATE	COPIES	TO WHOM

ISSUE

KEY PLAN

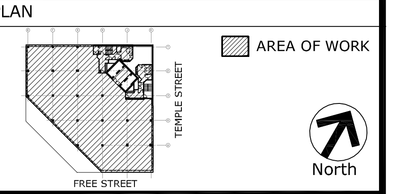

Ted Moudis Associates
ARCHITECTURE INTERIOR DESIGN
NEW YORK | CHICAGO

79 Madison Avenue
New York, NY 10017
212.308.4000
Fax/212.561 2020

One Financial Place
440 South LaSalle Street
Chicago, IL 60605
312.663.0130
Fax/312.663.0138

www.tedmoudis.com

ACCESSIBILITY NOTES

NOTE: GENERAL CONTRACTOR AND ALL SUB-CONTRACTORS SHALL BECOME FAMILIAR WITH A.N.S.I., ACCESSIBILITY STANDARDS, MINIMUM CLEARANCES AND SHALL INFORM THE ARCHITECT OF ANY AND ALL CONFLICTS WITH COMPLYING WITH THOSE MINIMUM CLEARANCES AND STANDARDS.

A.D.A. ACCESSIBILITY STANDARDS AND MINIMUM CLEARANCES ARE INCLUSIVE OF, BUT NOT LIMITED TO, FIGURES SHOWN ABOVE. GENERAL CONTRACTOR AND ALL SUB-CONTRACTORS SHALL REFER TO APPLICABLE LITERATURE (FEDERAL REGISTER, ETC.) FOR ADDITIONAL A.N.S.I STANDARDS.

ACCESSIBILITY NOTE: MEET ANSI A117.1-1986, SECTION 4.15 FOR DRINKING FOUNTAIN OR WATER COOLER; SECTION 4.32, 4.32.5 4 & 4.32.5.5 FOR WORKSURFACE & SINK.

PROJECT NUMBER 107126.01

SCALE AS NOTED

DATE 07.13.07

PROJECT MANAGER

PROJECT ARCHITECT

DRAWN BY AE

CHECKED BY

CADD FILE R:\2007\107126.01\CD

GENERAL NOTES

UBS
ONE CITY CENTER
PORTLAND, ME 04101

A002