Location of Construc	etion:	Owner:		Phone:		Permit No: 070/5/
939 0	Congress St	S & K Part	iners			970656
Owner Address:		Lessee/Buyer's Name:	Phone:	Busines		PERMIT ISSUED
<u> </u>			Congress St Ptld,	ME 041	02	Fermit Issued:
Contractor Name:		Address:	Phone:	77	3-6481	JUN 2 5 1997
Past Use:		Proposed Use:	COST OF WORK	:	PERMIT FEE:	- Jan 2 0 1001
			\$ 1,000.00)	\$ 30.00	OLTY OF BODT! AND
			FIRE DEPT. 🖪 A	pproved	INSPECTION:	CITY OF PORTLAND
Inn		Same	□ De	enied	Use Group: Type:	7
			1/	yns	a.	Zone: CBL: 065-C-001
Proposed Project Des	scription:		Signature.	/ _	Signature: CS DISTRICT (P.A.D.)	Zoning Approval;
1	F			pproved	S DISTRICT (F.A.D.)	0 - 5 6/23/97
					with Conditions:	Opecial Zone of Neviews:/
lst f	1/Change Use from V	acant space to		enied		
200 1	Additional room (•				☐ Flood Zone
			Signature:		Date:	Subdivision
Permit Taken By:	Mary Gresik	Date Applied For:	17 June 1997			☐ Site Plan maj ☐minor ☐mm ☐
			17 Julie 1997			Zoning Appeal
1. This permit app	olication does not preclude the	e Applicant(s) from meeting applicable	e State and Federal rules.			□ Variance
2. Building permi	its do not include plumbing,	septic or electrical work.				☐ Miscellaneous ☐ Conditional Use
3. Building permi	ts are void if work is not start	ed within six (6) months of the date of	issuance. False informa-			□Interpretation
	idate a building permit and st					□ Approved
						□ Denied
			ν	Um.		Historic Preservation
			•	THE	3 4	Not in District or Landmark
				4.0		☐ Does Not Require Review ☐ Requires Review
					٥	Likequiles Review
						Action:
		CERTIFICATION				□Appoved
I hereby certify that	I am the owner of record of t	he named property, or that the propose	d work is authorized by the	owner of	record and that I have been	
		as his authorized agent and I agree to				
		is issued, I certify that the code officia			ve the authority to enter al	1 1000 6/19/9
areas covered by su	ich permit at any reasonable l	hour to enforce the provisions of the c	code(s) applicable to such p	ermit		Date: 4 1 19
	$\left(\right) $	// /				~ ' , '
	Som X	1900	17 June 1997			ix Ad D
SIGNATURE OF AF	PLICANI Paul Hood	ADDRESS:	DATE:		PHONE:	- W. Mamus
		t.				
RESPONSIBLE PER	RSON IN CHARGE OF WO	RK, TITLE			PHONE:	CEO DISTRICT
	\Albita F	Pormit Dook Groom Assessed 5	Sanami D. D.W. Dink Dk	lio Ello	luoni Card Inancetos	
	-Panite-F	Permit Desk Green-Assessor's C	aliary-D.P.W. PINK-PUD	mc rile	ivory Caru-inspector	1 TordA-
						D. JOHNA

		, , , , , , , , , , , , , , , , , , , ,			
 3.31.98 all in Place	Smokes	and a	uditor	n with y	Elasker
in Place	c lose	permit		7	
 			· · · · · · · · · · · · · · · · · · ·		
 					
			Type	Inspection Record	Date
		Foundation:	Туре		Date
		Plumbing: _			
		Final:			



CITY OF PORTLAND, MAINE

Department of Building Inspection

Certificate of Occupancy

LOCATION BY CLEAN PROPERTY OF THE PROPERTY OF

_	to cortifu that the building maniger	Date of Issue , or part thereof, at the above location, built — altered			
 changed as substantially to occupancy or 	to use under Building Permit No. 174.434	, has had final inspection, has been found to conform Building Code of the City, and is hereby approved for			
	· ·	<u> </u>			
4	inger Kanton kang	words, single or buy the sort			
Limiting Cond	litions:				
This certificate certificate issu					
Approved:		· ·			
(Date)	Inspector	Inspector of Buildings			

1. 4.1.20

Notice: This certificate identifies lawful use of building or premises, and ought to be transferred from owner to owner when property changes hands. Copy will be furnished to owner or lessee for one dollar.

BUILDING PERMIT REPORT


DATE: (-)27	19.7	_ADDRESS: 939 Compret f	<u></u>
REASON FOR PERMIT:	Change	1154	
BUILDING OWNER:	Stk Por	tous	
CONTRACTOR:			
PERMIT APPLICANT:_	Paul Hord	APPROVAL: 4/ 4/6/5	DENIED
	CON	DITION(S) OF APPROVAL	

- ↓ 1. This permit does not excuse the applicant from meeting applicable State and Federal rules and laws.
- 2. Before concrete for foundation is placed, approvals from the Development Review Coordinator and Inspection Services must be obtained. (A 24 hour notice is required prior to inspection)
- 3. Precaution must be taken to protect concrete from freezing.
- 4. It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify that the proper setbacks are maintained.
- Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than I-hour fire resisting rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of ½ inch gypsum board or the equivalent applied to the garage means of ½ inch gypsum board or the equivalent applied to the garage side. (Chapter 4 Section 407.0 of the BOCA/1996)
- 6. All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National Mechanical Code/1993) U.L. 103.
- Guardrail & Handrails A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42", except Use Group R which is 36". In occupancies in Use Group A, B, H-4, I-1. I-2 M and R and public garages and open parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would provide a ladder effect.
- 8. Headroom in habitable space is a minimum of 7'6".
- 9. Stair construction in Use Group R-3 & R-4 is a minimum of 10" tread and 7 3/4" maximum rise. All other Use group minimum 11" tread. 7" maximum rise.
- 10. The minimum headroom in all parts of a stairway shall not be less than 80 inches.
- Every sleeping room below the fourth story in buildings of use Groups R and 1-1 shall have at least one operable window or exterior door approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate tools. Where windows are provided as means of egress or rescue they shall have a sill height not more than 44 inches (1118mm) above the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches (610mm). The minimum net clear opening width dimension shall be 20 inches (508mm), and a minimum net clear opening of 5.7 sq. ft.
 - 12. Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it exits directly from the apartment to the building exterior with no communications to other apartment units.
 - 13. All vertical openings shall be enclosed with construction having a fire rating of at lest one (1)hour, including fire doors with self closer's.
 - 14. The boiler shall be protected by enclosing with (1) hour fire-rated construction including fire doors and ceiling, or by providing automatic extinguishment.

All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City's Building Code Chapter 9, Section 19, 920.3.2 (BOCA National Building Code/1996), and NFPA 101 Chapter 18 & 19. (Smoke detectors shall be installed and maintained at the following locations):

- In the immediate vicinity of bedrooms
- In all bedrooms
- In each story within a dwelling unit, including basements

In addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and I-1 shall receive power from a battery when the AC primary power source is interrupted. (Interconnection is required)

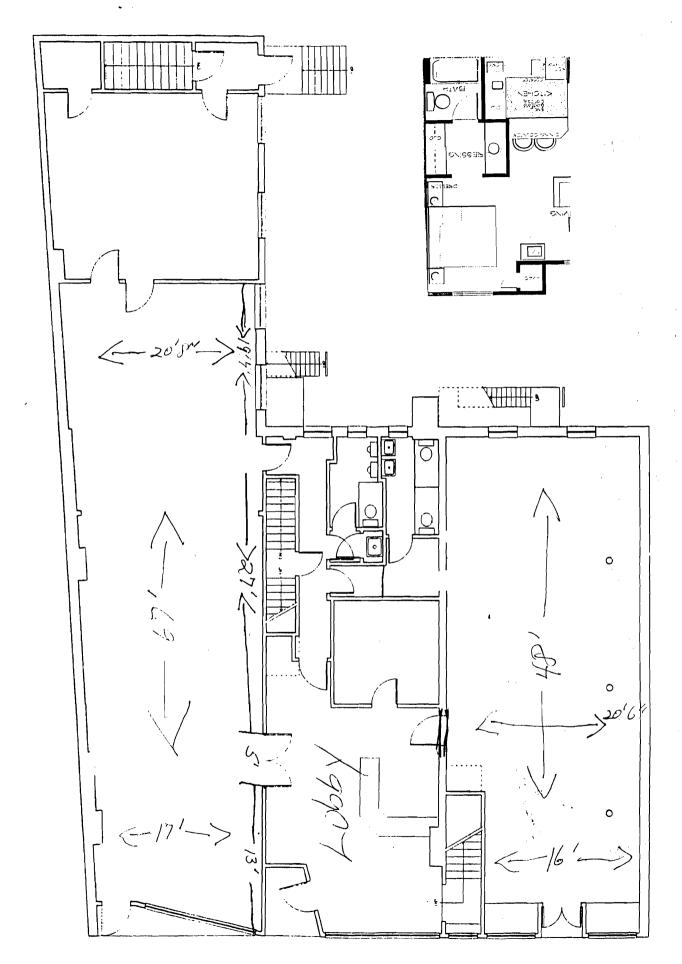

- 16. A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved type.
- 17. The Fire Alarm System shall be maintained to NFPA #72 Standard.
- 18. The Sprinkler System shall maintained to NFPA #13 Standard.
- 19. All exit signs, lights, and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023. & 1024. Of the City's building code. (The BOCA National Building Code/1996)
- 20. All construction and demolition debris must be disposed at the City's authorized reclamation site. The fee rate is attached. Proof of such disposal must be furnished to the office of Inspection Services before final Certificate of Occupancy is issued or demolition permit is granted.
- 21. Section 25-135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year".
- 22. The builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a certification from a design professional that the plans commencing construction of the facility, the builder shall submit the certification to the Division of Inspection Services.
- 23. This permit does not excuse the applicant from obtaining any license which may be needed from the City Clerk's office.
- 24. Ventilation shall meet the requirements of Chapter 12 Sections 1210, of the City's Building Code.

27.	<u> </u>
28.	

myet Hoffses Chief of Code Enforcement

c: Lt/McDougail, PFD Marge Schmuckal

AHUS