



Reviewed for Code Compliance
Inspections Division
Approved with Conditions

SUBSURFACE WASTEWATER DISPOSAL SYSTEM APPLICATION

PROPERTY LOCATION
City, Town, or Plantation: PORTLAND, PEAKS ISLAND
Street or Road: 20 PARK AVE
Subdivision, Lot #: 087 C002001

>>CAUTION: LPI APPROVAL
Town/City: Portland
Date Permit Issued: / /
Fee \$: 260.00

OWNER/APPLICANT INFORMATION
Name (last, first, MI): HEALY / HEAPS TODD / BRENNIA
Mailing Address of Owner/Applicant: C/O CHRIS MILLER WINKELMAN ARCHITECTURE 41 UNION WHARF, SUITE 4 PORTLAND, ME 04101
Daytime Tel. #: 699-2998 EXT. 103

Local Plumbing Inspector Signature:
Date: 01/30/14
Municipal Tax Map #: 87 Lot #: C2

OWNER OR APPLICANT STATEMENT
I state and acknowledge that the information submitted is correct to the best of my knowledge and understand that any falsification is reason for the Department and/or Local Plumbing Inspector to deny a permit.

CAUTION: INSPECTION REQUIRED
I have inspected the installation authorized above and found it to be in compliance with the Subsurface Wastewater Disposal Rules Application.

Signature of Owner/Applicant: Date: Local Plumbing Inspector Signature: (1st) Date Approved: (2nd) Date Approved:

PERMIT INFORMATION

TYPE OF APPLICATION
1. First Time System
2. Replacement System
3. Expanded System
4. Experimental System
5. Seasonal Conversion

THIS APPLICATION REQUIRES
1. No Rule Variance
2. First Time System Variance
3. Replacement System Variance
4. Minimum Lot Size Variance
5. Seasonal Conversion Permit

DISPOSAL SYSTEM COMPONENTS
1. Complete Non-Engineered System
2. Primitive System (graywater & alt toilet)
3. Alternative Toilet, specify:
4. Non-Engineered Treatment Tank (only)
5. Holding Tank, gallons
6. Non-Engineered Disposal Field (only)
7. Separated Laundry System
8. Complete Engineered System (2000gpd+)
9. Engineered Treatment Tank (only)
10. Engineered Disposal Field (only)
11. Pre-treatment, specify:
12. Miscellaneous components

SIZE OF PROPERTY
1.4 ACRES
SQ. FT.
ACRES

DISPOSAL SYSTEM TO SERVE
1. Single Family Dwelling Unit, No. of Bedrooms: 2
2. Multiple Family Dwelling, No of Units:
3. Other:

TYPE OF WATER SUPPLY
1. Drilled Well
2. Dug Well
3. Private
4. Public
5. Other:

SHORELAND ZONING
Yes
No

Current Use
Seasonal
Year Round
Undeveloped

TYPE OF WATER SUPPLY
1. Drilled Well
2. Dug Well
3. Private
4. Public
5. Other:

DESIGN DETAILS (SYSTEM LAYOUT SHOWN ON PAGE 3)

TREATMENT TANK
1. Concrete
a. Regular
b. Low Profile
2. Plastic
3. Other:
CAPACITY: 1000 GAL.

DISPOSAL FIELD TYPE & SIZE
1. Stone Bed
2. Stone Trench
3. Proprietary Device
a. Cluster array
c. Linear
b. Regular
d. H-20 loaded
4. Other:
SIZE: 624 sq. ft. 13 ELJEN IN DRAIN UNITS

GARBAGE DISPOSAL UNIT
1. No
2. Yes
3. Maybe
If Yes or Maybe, specify one below:
a. Multi-compartment tank
b. tanks in series
c. Increase in tank capacity
d. Filter on tank outlet
PROVIDE ACCESS

DESIGN FLOW
180 gallons per day
BASED ON:
1. Table 4A (dwelling unit(s))
2. Table 4C (other facilities)
SHOW CALCULATIONS for other facilities

SOIL DATA & DESIGN CLASS
PROFILE: 2 / A
CONDITION: A
at Observation Hole # TP 1
Depth 24"
of Most Limiting Soil Factor

DISPOSAL FIELD SIZING
1. Medium - 2.6 sq.ft./gpd
2. Medium-Large - 3.3 sq.ft./gpd
3. Large - 4.1 sq.ft./gpd
4. Extra-Large - 5.0 sq.ft./gpd

EFFLUENT/EJECTOR PUMP
SEE SEPTIC TANK NOTE ON PAGE 3
1. Not required
2. May be required
3. Required
Specify only for engineered systems:
DOSE: gallons

LATITUDE AND LONGITUDE
at center of disposal area
Lat. 43 d 39 m 41 s
Lon. 70 d 11 m 37 s
if g.p.s., state margin of error

SITE EVALUATOR STATEMENT

I certify that on 10/2/13 (date) I completed a site evaluation on this property and state that the data reported is accurate and that the proposed system is in compliance with the Subsurface Wastewater Disposal Rules (10-144A CMR 241).

Albert Frick
Site Evaluator Signature

163
SE #

10/7/2013
Date

ALBERT FRICK
Site Evaluator Name Printed

(207) 839-5563
Telephone Number

ALBERT@ALBERTFRICK.COM
E-mail Address

# SUBSURFACE WASTEWATER DISPOSAL SYSTEM APPLICATION

Maine D  
Division of  
(207) 28



Town, City, Plantation  
**PORTLAND, PEAKS ISLAND**

Street, Road Subdivision  
**20 PARK AVE**

Own  
**TODD HEA**


SITE PLAN

Scale 1" = 100 Ft.  
or as shown

SIT  
(At  
Atlc  
Var

Reviewed for Code Compliance  
Inspections Division  
Approved with Conditions

Date: 01/30/14

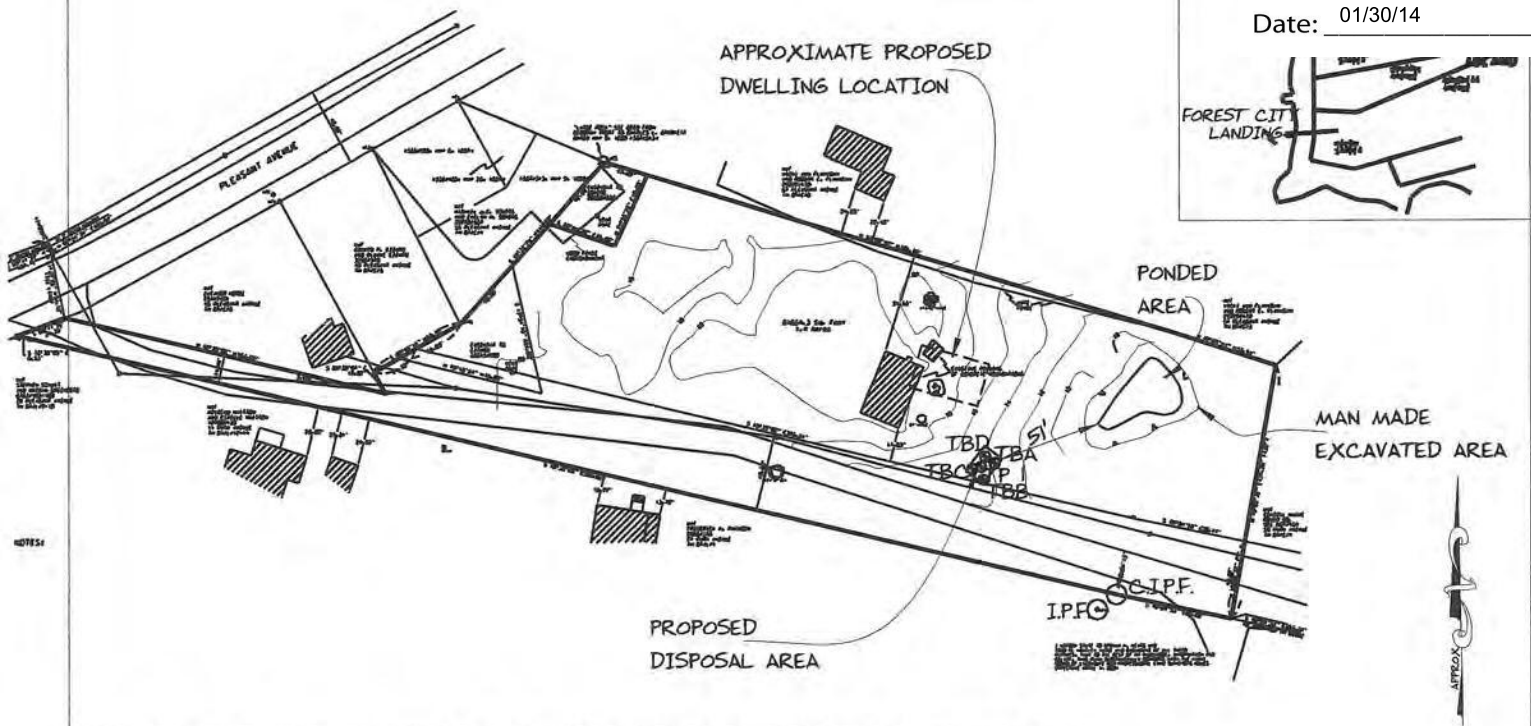

NOTE: PROPERTY LINES PER SURVEY PROVIDED BY OWNERS REPRESENTATIVE. VERIFY PRIOR TO INSTALLATION TO ASSURE ALL PORTIONS OF DISPOSAL AREA ARE CONTAINED ON PROPERTY

## SOIL DESCRIPTION AND CLASSIFICATION (Location of Observation Holes Shown Above)

Observation Hole TP 1  Test Pit  Boring  
" Depth of Organic Horizon Above Mineral Soil

DEPTH BELOW MINERAL SOIL SURFACE (inches)	Texture	Consistency	Color	Mottling
0			DARK BROWN	
10	STONY SANDY LOAM	FRIABLE		NONE EVIDENT
20			YELLOWISH BROWN	
30	BEDROCK			
40				
50				

Soil Classification: Profile 2 Condition A Slope 25%  
Limiting Factor:  Bedrock  
 Ground Water  Restrictive Layer  Pit Depth

Observation Hole TP 1  Test Pit  Boring  
" Depth of Organic Horizon Above Mineral Soil

DEPTH BELOW MINERAL SOIL SURFACE (inches)	Texture	Consistency	Color	Mottling
0				
10				
20				
30				
40				
50				

Soil Classification: Profile TP 1 Condition --- Slope ---  
Limiting Factor:  Ground Water  Restrictive Layer  Bedrock  Pit Depth

TBA = 24" TO BEDROCK  
TBB = 15" TO BEDROCK  
TBC = 14" TO BEDROCK  
TBD = 21" TO BEDROCK

*Albert Frick*  
Site Evaluator Signature

163  
SE #

10/7/2013  
Date

Page 2 of 3  
HHE-200 Rev. 10/02

# SUBSURFACE WASTEWATER DISPOSAL SYSTEM APPLICATION



Main Division (207)

Town, City, Plantation

Street, Road, Subdivision

PORTLAND, PEAKS ISLAND

20 PARK AVE

TODD HEALY

Reviewed for Code Compliance  
Inspections Division  
Approved with Conditions

Date: 01/30/14

APPROXIMATE PROPOSED DWELLING LOCATION (20' MIN. FROM DISPOSAL AREA WITH FULL FOUNDATION)

NEW 1000 GALLON CONCRETE SEPTIC TANK LOCATE WHERE FEASIBLE, 8' MIN. FROM BUILDING STRUCTURE & 50'+ FROM PONDED AREA SET AT HIGH ENOUGH ELEVATION TO PROVIDE GRAVITY FLOW OR PROVIDE PUMP STATION

## SUBSURFACE WASTEWATER DISPOSAL PLAN

DISTRIBUTION BOX, INSL. WITH MIN. 2" INSULATION PER CODE

APPROXIMATE TOE OF FILL

IF PUMPING USE 1 1/2" TO 2" DIA. EFFLUENT LINE BURIED BELOW FROST OR INSULATE TO PROTECT FROM FREEZING OR IF GRAVITY FLOW USE 4" DIA. SDR35 SOLID PVC

CROSS SECTION

EXISTING GRADE AT CORNER

EXISTING SURFACE WATER RUN-OFF

PROPOSED DISPOSAL AREA (13 ELJEN IN DRAIN UNITS)


PROPOSED CULVERT

PARK AVENUE (TRAVELLED WAY)

EDGE OF MANMADE EXCAVATED AREA

PROPERTY LINE VERIFY PRIOR TO INSTALLATION TO ASSURE ALL PORTIONS OF DISPOSAL AREA ARE CONTAINED ON PROPERTY

ERP: NAIL IN 10" DIA. POPLAR TREE



### FILL REQUIREMENTS

Depth of Fill (Upslope) : 23" - 40"  
Depth of Fill (Downslope) : 33" - 43"  
DEPTHS AT CROSS-SECTION (shown below)


### CONSTRUCTION ELEVATIONS

Finished Grade Elevation  
Top of Distribution Pipe or Proprietary Device  
Bottom of Disposal Area



SEE DETAIL BELOW

ELEVATION REFERENCE POINT  
10" DIA. FLAGGED POPLAR  
NAIL 59" ABOVE BASE OF TREE  
Reference Elevation is: 0.0" or -----

### DISPOSAL AREA CROSS SECTION



SCALE:  
VERTICAL: 1" = 5 FT  
HORIZONTAL: 1" = 10 FT

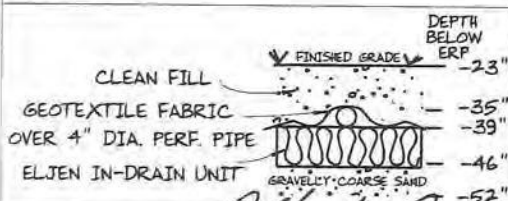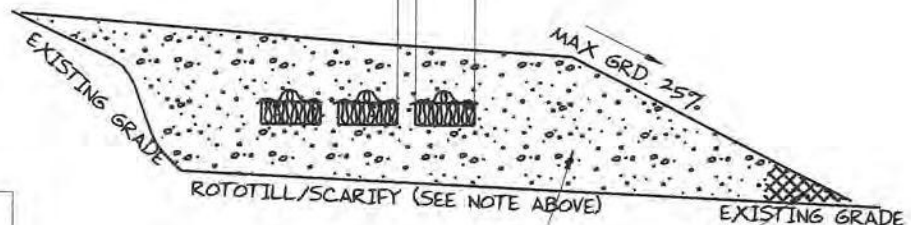

*Albert Frick*  
Site Evaluator Signature

163  
SE \*

10/7/2013  
Date

Page 3 of 3  
HHE-200 Rev. 10/02



PORTLAND, PEAKS ISLAND                      20 PARK AVE                      TODD HEALY & BR  
 TOWN    LOCATION    APPLICANT

Date: 01/30/14

1) The Plumbing and Subsurface Wastewater Disposal Rules adopted by the State Division of Health and Human Services pursuant to 22 M.R.S.A. § 42 (the "Rules") are incorporated herein by reference and made a part of this application and shall be consulted by the owner/applicant, the system installer and/or building contractor for further construction details and material specifications. The system Installer should contact Albert Frick Associates, Inc. 839-5563, if there are any questions concerning materials, procedures or designs. The system installer and/or building contractor installing the system shall be solely responsible for compliance with the Rules and with all state and municipal laws and ordinances pertaining to the permitting, inspection and construction of subsurface wastewater disposal systems.

2) This application is intended to represent facts pertinent to the Rules only. It shall be the responsibility of the owner/applicant, system Installer and/or building contractor to determine compliance with and to obtain permits under all applicable local, state and/or federal laws and regulations (including, without limitation, Natural Resources Protection Act, wetland regulations, zoning ordinances, subdivision regulations, Site Location of Development Act and Minimum Lot Size law) before installing this system or considering the property on which the system is to be installed a "buildable" lot. It is recommended that a wetland scientist be consulted regarding wetland regulations. Prior to the commencement of construction/installation, the local plumbing inspector or Code Enforcement Officer shall inform the owner/applicant and Albert Frick Associates, Inc of any local ordinances which are more restrictive than the Rules in order that the design may be amended. All designs are subject to review by local, state and/or federal authorities. Albert Frick Associates, Inc.'s liability shall be limited to revisions required by regulatory agencies pursuant to laws or regulations in effect at the time of preparation of this application.

3) All information shown on this application relating to property lines, well locations, subsurface structures and underground facilities (such as utility lines, drains, septic systems, water lines, etc.) are based upon information provided by the owner/applicant and has been relied upon by Albert Frick Associates, Inc. in preparing this application. The owner/applicant shall review this application prior to the start of construction and confirm this information. Well locations on abutting properties but not readily visible above grade should be confirmed by the owner/applicant prior to system installation to assure minimum setbacks.

4) Installation of a garbage (grinder) disposal is not recommended. If one is installed, an additional 1000 gallon septic tank or a septic tank filter shall be connected in series to the proposed septic tank. Risers and covers should be installed over the septic tank outlet per the "Rules" to allow for easy maintenance of filter.

5) The septic tank should be pumped within two years of installation and subsequently as recommended by the pump service, but in no event should the septic tank be pumped less often than every three years.

The system user shall avoid introducing kitchen grease or fats into this system. Chemicals such as septic tank cleaners and/or chlorine (such as from water treatment units) and controlled or hazardous substances shall not be disposed of in this system. Additives such as yeast or enzymes are discouraged, since they have not been proven to extend system life.

6) All septic tanks, pump stations and additional treatment tanks shall be installed to prevent ground water and surface water infiltration. Risers and covers should be properly installed to provide access while preventing surface water intrusion to within 6" of a finished ground surface.

Vehicular traffic over disposal system is prohibited unless specifically designed with H-20 rated components.



PORTLAND, PEAKS ISLAND	20 PARK AVE	TODD HEALY & BR
TOWN	LOCATION	APPLICANT'S

Reviewed for Code Compliance  
 Inspections Division  
 Approved with Conditions

Date: 01/30/14

- 7) The actual waste water flow or number of bedrooms shall not exceed the design indicated on this application without a re-evaluation of the system as proposed
- 8) The general minimum setbacks between a well (public or private) and septic system serving a single family residence is 100-300 feet, unless the local municipality has a more stringent requirement. A well installed by an abutter within the minimum setback distances prior to the issuance of a permit for the proposed disposal system may void this design.
- 9) When a gravity system is proposed: BEFORE CONSTRUCTION/INSTALLATION BEGINS, the system installer or building contractor shall review the elevations of all points given in this application and the elevation of the existing and/or proposed building drain and septic tank inverts for compatibility to minimum pitch requirements. In gravity systems, the invert of the septic tank(s) outlet(s) should be at least 4 inches above the invert of the distribution box outlet at the disposal area.
- 10) When an effluent pump is required: Pump stations should be sized per manufacturer's specifications to meet lift requirements and friction loss. Provisions shall be made to make certain that surface and ground water does not enter the septic tank or pump station, by sealing/grouting all seams and connections, and by placement of a riser and lid at or above grade. An alarm device warning of a pump failure shall be installed. Also, when pumping is required of a chamber system, install a 'T' connection in the distribution box and place 3 inches of stone or a splash plate in the first chamber. Insulate gravity pipes, pump lines and the distribution box as necessary to prevent freezing.
- 11) On all systems, remove the vegetation, organic duff and old fill material from under the disposal area and any fill extension. Additional fill beyond indicated on plan may be necessary to replace organic matter. On sites where the proposed system is to be installed in natural soil, scarify the bottom and sides of the excavated disposal area with a rake. Do not use wheeled equipment on the scarified soil surface. For systems installed in fill, scarify the native soil by roto-tilling or scarifying with teeth of backhoe to a depth of at least 8 inches over the entire disposal and fill extension area to prevent glazing and to promote fill bonding. Place fill in loose layers no deeper than 8 inches and compact before placing more fill (this ensures that voids and loose pockets are eliminated to minimize the chance of leakage or differential settling). Do not use wheeled equipment on the scarified soil area until after 12 inches of fill is in place. Keep equipment off proprietary devices. Divert the surface water away from the disposal area by ditching or shallow landscape swales.
- 12) Unless noted otherwise, fill shall be gravelly coarse sand, which contains no more than 5% fines (silt and clay). Crushed stone shall be clean and free of any rock dust from the crushing process.
- 13) Do not install systems on loamy, silty, or clayey soils during wet periods since soil smearing/glazing may seal off the soil interface.
- 14) Seed all filled and disturbed surfaces with perennial grass seed, with 4" min. soil or soil amendment mix suitable for growing, then mulch with hay or equivalent material to prevent erosion. Alternatively, bark or permanent landscape mulch may be used to cover system. Woody trees or shrubs are not permitted on the disposal area or fill extensions.
- 15) If an advanced wastewater treatment unit is part of the design, the system shall be operated and maintained per manufacturer's specifications.



**Albert Frick Associates, Inc.**  
 Soil Scientists & Site Evaluators  
 95A County Road Gorham, Maine 04038  
 (207) 839-5563

SUBSURFACE INSPECTION PROCEDURES  
Please call 874-8703 or 874-8693 (ONLY)  
or email: [buildinginspections@portlandmaine.gov](mailto:buildinginspections@portlandmaine.gov)

**Check the Status or Schedule an Inspection On-Line at  
<http://www.portlandmaine.gov/planning/permitstatus.asp>**

With the issuance of this permit, the owner, builder or their designee is required to provide adequate notice to the city of Portland Inspections Services for the following inspections. Appointments must be requested at least 24 hours in advance of the required inspection. The inspection date will need to be confirmed by this office.

- **Please read the conditions of approval that is attached to this permit!! Contact this office if you have any questions.**
- **Permits expire in 24 months of the date of issuance.**
- **If the inspection requirements are not followed as stated below additional fees may be incurred due to the issuance of a "Stop Work Order" and subsequent release to continue with construction.**

### **REQUIRED INSPECTIONS SEPTIC FIELD:**

1. After Site Preparation: Septic field and extension inspection for bottom preparation/scarification to verify removal of vegetation and roughened surface, established transitional horizon and erosion and sedimentation control measures.
2. Prior to covering the system: Inspection of system components including stone, pipes or proprietary devices, tanks, hay, filter fabric, and fill beneath and beside the disposal area before backfill. Also included are curtain drains, diversion ditches, berms or other measures outlined in the design.

The project cannot move to the next phase prior to the required inspection and approval to continue, REGARDLESS OF THE NOTICE OF CIRCUMSTANCES.

IF THE PERMIT REQUIRES A CERTIFICATE OF OCCUPANCY, IT MUST BE PAID FOR AND ISSUED TO THE OWNER OR DESIGNEE BEFORE THE SPACE MAY BE OCCUPIED.

<b>City of Portland, Maine - Building or Use Permit</b>		<b>Permit No:</b> 2013-02568	<b>Date Applied For:</b> 11/18/2013	<b>CBL:</b> 087 C002001
389 Congress Street, 04101 Tel: (207) 874-8703, Fax: (207) 874-8716				
<b>Proposed Use:</b>		<b>Proposed Project Description:</b>		
<b>Dept:</b> Building	<b>Status:</b> Approved	<b>Reviewer:</b> Tammy Munson	<b>Approval Date:</b> 01/30/2014	
<b>Note:</b>				<b>Ok to Issue:</b> <input checked="" type="checkbox"/>
<b>Conditions:</b>				