City of Portland, Maine – Building or Use Permit Application 389 Congress Street, 04101, Tel: (207) 874-8703, FAX: 874-8716

Location of Construction:	Owner:	Phone:	Permit No:
48 Ashmont St.	Keith Bagley		000606
Owner Address:	Lessee/Buyer's Name:	Phone: BusinessName:	COULD SUFD
Contractor Name:	Address:	Phone:	Permit Issued:
Paul Davis Resonation	1912 Brondway So.	Part Land 775_0070	101 2000
Past Use:	Proposed Use:	COST OF WORK: PERMIT FEE	JUN 2 9 2000
		\$ \$ 102,00	
Single Family	Sano	FIRE DEPT. Approved INSPECTION	LCITY OF PORILAND
		Denied Use Group P	Zone: CBL:
	Charles and the second	Signature: Signature: 7	201-1-5 125-11-010
Proposed Project Description:		PEDESTRIAN ACTIVITIES DISTRICT (P.A.D.) Zoning Approval:
		Action: Approved	Special Zone or Reviews:
and the second se		Approved with Conditions:	
rebuild Dormer		Denied	U U Wetland U 29//
		Signature: Date:	
Permit Taken By: GG	Date Applied For:		
		June 26, 2000 GG	Zoning Appeal
1. This permit application does not preclude	the Applicant(s) from meeting applicable S	State and Federal rules.	
2. Building permits do not include plumbing			
3. Building permits are void if work is not sta	Conditional Use		
tion may invalidate a building permit and	Approved		
			Denied
			Historic Preservation
	Calls Par	1 Davis Resonation @ 775-0070	Not in District or Landmark
	ACTT: LED		Does Not Require Review
		PERMITISSU	JED
		WITH REQUIRE	MENIS Action:
	CERTIFICATION		
I hereby certify that I am the owner of record o	have been Approved with Conditions		
		onform to all applicable laws of this jurisdiction. I	
		authorized representative shall have the authority	to enter all Date:
areas covered by such permit at any reasonabl	e nour to enforce the provisions of the coc	le(s) applicable to such permit	
		Juee 26, 2000	1.5
SIGNATURE OF APPLICANT	ADDRESS:	DATE: PHONE:	
SIGNALORE OF AFFLICANT	ADDRESS.	DALL. FHORE.	PERMITISSUED
			WITH REQUIREMENTS
RESPONSIBLE PERSON IN CHARGE OF W	ORK, TITLE	PHONE:	CEO DISTRICT
White	-Permit Desk Green-Assessor's Car	nary-D.P.W. Pink-Public File Ivory Card-Ins	pector

THIS IS NOT A PERMIT/CONSTRUCTION CANNOT COMMENCE UNTIL THE PERMIT IS ISSUED

Minor/Minor Site Review, Building or Use Permit Pre-Application Detached Single Family Dwelling

In the interest of processing your application in the quickest possible manner, please complete the Information below for a Building or Use Permit.

NOTE**If you or the property owner owes real estate or personal property taxes or user charges on any property within the City, payment arrangements must be made before permits of any kind are accepted.

Locati	on/Address of Construction 48 Ashing	ont Street Portland	ME
Total S	Square Footage of Proposed Structure 195	S.F. Square Footage of Lot	
Tax A	ssessor's Chart, Block & Lot Number	Owner.	Telephonen
Chart#	125 Block# H Lot# 10	Keith Bagky	415-3945
Lessee	Buyer's Name (If Applicable)	Owner's Purchaser/Lessee Address:	Cost Of Work: 13,000 Fee \$ 00000 \$102,0
-	sed Project Description (Please be as specific as possible)	Rive I support to code	c - See enclosed plan
Conte		2 Broadway South Port	
• 41	Separate permits are require l construction must be conducted in compl	d for Internal & External Plumbing, HVAC and Electriciance with the 1996 BOCA Building C	
201	-	acted in compliance with the State of Mai	•
	•All Electrical Installation must comply		
•}	HVAC(Heating, Ventilation and Air Cond		•
	ust Include the following with you application:		
		y of Your Deed or Purchase and Sale Agreement	
	2) A Co	ppy of your Construction Contract, if available 3) A Plot Plan (Sample Attached)	
A "mi	inor/minor" site plan review is required prior		repared and sealed by a registered land
	vor (2 copies are required). A complete plot		
•	The shape and dimension of the lot, all e	existing buildings (if any), the proposed strue	cture and the distance from the actual
	property lines. Structures include decks p	porches, a bow windows cantilever sections	and roof overhangs, as well as, sheds,
	pools, garages and any other accessory si	ructures.	CITY OF COLDING INC
•	Scale and North arrow: Zoning District &		FORTLAND
•	First Floor sill elevation (based on mean		
•	Location and dimensions of parking area		ing the building:
•		s in the street and the proposed utilities serv	ing the building
•	Location of areas on the site that will be	used to dispose of surface water.	UU E PR
•	Existing and proposed grade contours	() Puilding Plans (Sample 1stacked)	E W R
A com	plete set of construction drawings showing all of the follo	4) Building Plans (Sample Attached) was elements of construction	0 13 10
•		ling porches, decks w/ railings, and accesso	ry structures)
•	Floor Plans & Elevations		
•	Window and door schedules		
•	Foundation plans with required drainage and dampproofing		
•		cal drawings for any specialized equipment	
	THE STREET OF MERSON IN	ing) or other types of work that may require Certification	
[hereb	y certify that I am the Owner of record of the named prop to make this application as his ther authorized agent. I as	perty, or that the proposed work is authorized by the ow ree to conform to all applicable laws of this jurisdiction	mer of record and that I have been authorized by the In addition, if a permit for work described in this

Site Review Fee: \$300.00/Building Permit Fee: \$30.00 for the 1st \$1000.cost plus \$6.00 per \$1.000.00 construction cost thereafter.

Date:

00

application is issued, I certify that the Code Official's authorized representative shall have the authority to enter all areas covered by this permit at any reasonable hour to

enforce the provisions of the codes applied of this permit.

Signature of applicant:

BUILDING PERMIT REPORT				
DA	ATE: 27 June 2000 ADDRESS: 48 AshmonT ST. CBL: 125-H-DIO			
RI	CASON FOR PERMIT: Rebuild dorman			
BI	ALDING OWNER: Keith Bagley			
	RMIT APPLICANT:ICONTRACTOR Paul Davis Bestoration			
US	E GROUP: $\underline{M-3}$ construction type: $\underline{5.3}$ construction cost: $\underline{MB000}$ $\underline{\sim}$ permit fees: $\underline{102.5}$			
	e City's Adopted Building Code (The BOCA National Building code/1999 with City Amendments) e City's Adopted Mechanical Code (The BOCA National Mechanical Code/1993)			
	CONDITION(S) OF APPROVAL			
ТЬ	is permit is being issued with the understanding that the following conditions are met: $\frac{\frac{1}{27} + 27 + 29 + 32 + 34}{7}$			
1. 2.	This permit does not excuse the applicant from meeting applicable State and Federal rules and laws. Before concrete for foundation is placed, approvals from the Development Review Coordinator and Inspection Services must be obtained. (A 24 hour notice is required prior to inspection) "ALL LOT LINES SHALL BE CLEARLY MARKED BEFORE CALLING."			
3.	Foundation drain shall be placed around the perimeter of a foundation that consists of gravel or crushed stone containing not more than 10 percent material that passes through a No. 4 sieve. The drain shall extend a minimum of 12 inches beyond the outside edge of the footing. The thickness shall be such that the bottom of the drain is not higher than the bottom of the base under the floor, and that the top of the drain is not less than 6 inches above the top of the footing. The top of the drain shall be covered with an approved filter membrane material. Where a drain tile or perforated pipe is used, the invert of the pipe or tile shall not be higher than the floor elevation. The top of joints or top of perforations shall be protected with an approved filter membrane material. The pipe or tile shall be placed on not less than 2" of gravel or crushed stone, and shall be covered with not less than 6" of the same material. Section 1813.5.2			
4.	Foundations anchors shall be a minimum of 12" in diameter, 7" into the foundation wall, minimum of 12" from corners of foundation and a maximum 6' O.C. between bolts. Section 2305.17			
5:	Waterproofing and dampproofing shall be done in accordance with Section 1813.0 of the building code.			
6. 7.	Precaution must be taken to protect concrete from freezing. <u>Section 1908.0</u> It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify that the			

- It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify that the proper setbacks are maintained.
- 8. Private garages located <u>beneath habitable rooms</u> in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. <u>Private garages attached side-by-side to rooms</u> in the above occupancies shall be completely separated from the interior spaces and the attic area by means of ½ inch gypsum board or the equivalent applied to the garage side. (Chapter 4, Section 407.0 of the BOCA/1999)
- 9. All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National Mechanical Code/1993). Chapter 12 & NFPA 211
- 10. Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the City's Building Code.
- 11. Guardrails & Handrails: A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42". In occupancies in Use Group A, B, H-4, I-1, I-2, M and R and public garages and open parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would provide a ladder effect. (Handrails shall be a minimum of 34" but not more than 38". Exception: Handrails that form part of a guard shall have a height not less than than 36" and not more than 42". Handrail grip size shall have a circular cross section with an outside diameter of at least 1 ¼" and not greater than 2". (Sections 1021 & 1022.0). Handrails shall be on both sides of stairway. (Section 1014.7)
- 12. Headroom in habitable space is a minimum of 7'6'. (Section 1204.0)
- Stair construction in <u>Use Group R-3 & R-4 is a minimum of 10" tread and 7 ¼" maximum rise</u>. All other Use Group minimum 11" tread. T' maximum rise. (Section 1014.0)
- 14. The minimum headroom in all parts of a stairway shall not be less than 80 inches. (6'8") 1014.4
- 15. Every sleeping room below the fourth story in buildings of Use Groups R and I-1 shall have at least one opcrable window or exterior door approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate tools. Where windows are provided as <u>means of egress or rescue</u> they shall have a sill height not more than 44 inches (1118mm) above the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches (610mm). The minimum net clear opening width dimension shall be 20 inches (508)mm, and a minimum net clear opening of 5.7 sq. ft. (Section 1010.4)
- 16. Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it exits directly from the apartment to the building exterior with no communications to other apartment units. (Section 1010.1)
- 17. All vertical openings shall be enclosed with construction having a fire rating of at least one (1) hour, including fire doors with self closer's. (Over 3 stories in height requirements for fire rating is two (2) hours. (Section 710.0)
- The boiler shall be protected by enclosing with (1) hour fire rated construction including fire doors and ceiling, or by providing automatic extinguishment. (Table 302.1.1)

- 19. All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City's Building Code Chapter 9, Section 920.3.2 (BOCA National Building Code/1999), and NFPA 101 Chapter 18 & 19. (Smoke detectors shall be installed and maintained at the following locations):
 - In the immediate vicinity of bedrooms
 - In all bedrooms
 - In each story within a dwelling unit, including basements
- 20. A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved type. (Section 921.0)
- 21. The Fire Alarm System shall be installed and maintained to NFPA #72 Standard.
- 22. The Sprinkler System shall be installed and maintained to NFPA #13 Standard.
- 23. All exit signs, lights and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023.0 & 1024.0 of the City's Building Code. (The BOCA National Building Code/1999)
- 24. Section 25 135 of the Municipal Code for the City of Porland states, "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year".
- 25. The builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a certification from a design professional that the plans commencing construction of the facility, the builder shall submit the certification the Division of Inspection Services.
- 26. Ventilation and access shall meet the requirements of Chapter 12 Sections 1210.0 and 1211.0 of the City's Building Code. (Crawl spaces & attics).
- 27. All electrical, plumbing and HVAC permits must be obtained by a Master Licensed holders of their trade. No closing in of walls until all electrical (min. 72 hours notice) and plumbing inspections have been done.
- 28. All requirements must be met before a final Certificate of Occupancy is issued.
- 29. All building elements shall meet the fastening schedule as per Table 2305.2 of the City's Building Code (The BOCA National Building Code/1996).
- 30. Ventilation of spaces within a building shall be done in accordance with the City's Mechanical code (The BOCA National Mechanical Code/1993). (Chapter M-16)
- 31. Please read and implement the attached Land Use Zoning report requirements.
- 32. Boring, cutting and notching shall be done in accordance with Sections 2305.3, 2305.3.1, 2305.4.4 and 2305.5.1 of the City's Building Code.
- 33. Bridging shall comply with Section 2305.16.
- X 34. Glass and glazing shall meet the requirements of Chapter 24 of the building code. (Safety Glazing Section 2406.0)
 - 35. All signage, shall be done in accordance with Section 3102.0 signs of the City's Building Code, (The BOCA National Building Code/1999).

muel Hoffses, Building Inspector LA, McDougall, PFD Marge Schmuckal, Zoning Administrator


PSH 1/2600

**On the basis of plans submitted and conditions placed on these plans any deviations shall require a separate approval.

••••THIS PERMIT HAS BEEN ISSUED WITH THE UNDERSTANDING THAT ALL THE CONDITIONS OF THE APPROVAL SHALL BE COMPLETED. THEREFORE, BEFORE THE WORK IS COMPLETED A REVISED PLAN OR STATEMENT FROM THE PERMIT HOLDER SHALL BE SUBMITTED TO THIS OFFICE SHOWING OR EXPLAINING THAT THE CONDITIONS HAVE BEEN MET. IF THIS REQUIREMENT IS NOT RECEIVED YOUR CERTIFICATE OF OCCUPANCY SHALL BE WITHHELD.

****CERTIFICATE OF OCCUPANCY FEE \$50.00

**** All PLANS THAT REQUIRE A PROFESSIONAL DESIGNER'S SEAL,(AS PER SECTION114.0 OF THE BUILDINGCODE) SHALL ALSO BE PRESENTED TO THIS DIVISION ON AUTO CAD LT.2000, OR EQUIVALENT.

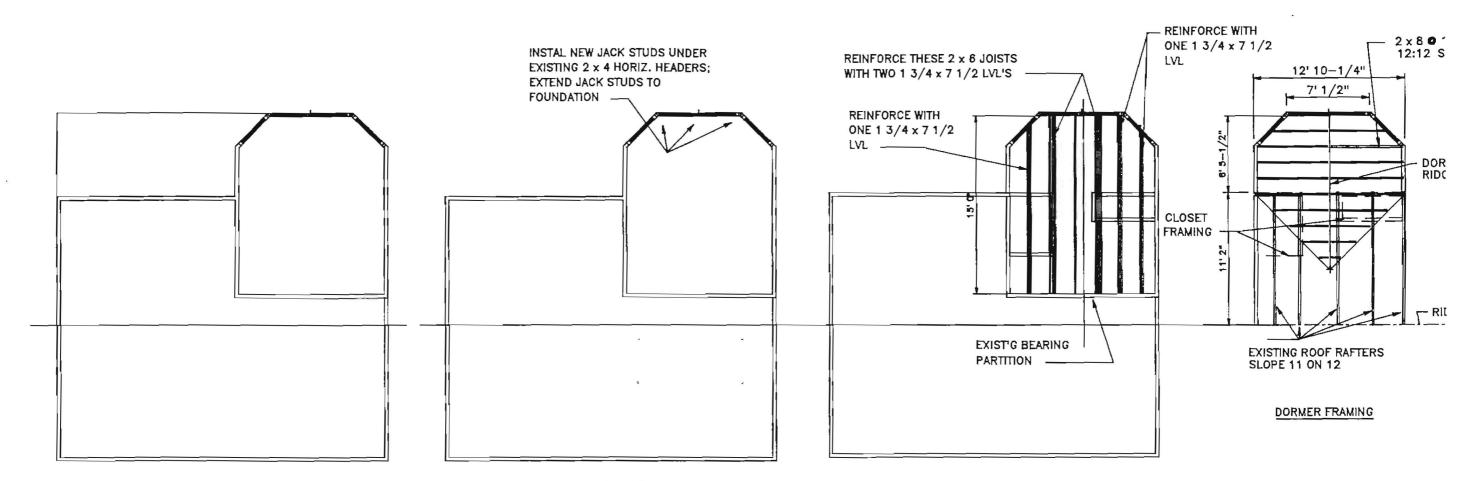

FIRST FLOOR

SECOND FLOOR

TE OF MAIN ALEXANDER CINEER RECUSI HUTCHEON 2247 Tellion 4/00

THIRD FLOOR

NOTES:

THE CONTRACTOR IS REPOSNIBLE FOR VERIFYING ALL CONDITIONS, AND FOR COMPLIANCE WITH BUILDING CODE.

LVL'S SHALL BE EQUAL TO MICRO-LAM, BY WOOD STRUCTURES, INC. FOLLOW MANUFACTURER'S INSTRUCTIONS FOR INSTALLATION.

FRAMING FOR REPAIR OF DORMER 48 ASHMONT ST. PORTLAND, ME.

ALEXANDER HUTCHEON Associate Engineers 519 Congress Street Portland, ME 041(JUNE 12, 2000

Kune/2k

(207) 774-048 Fax: (207) 774-041