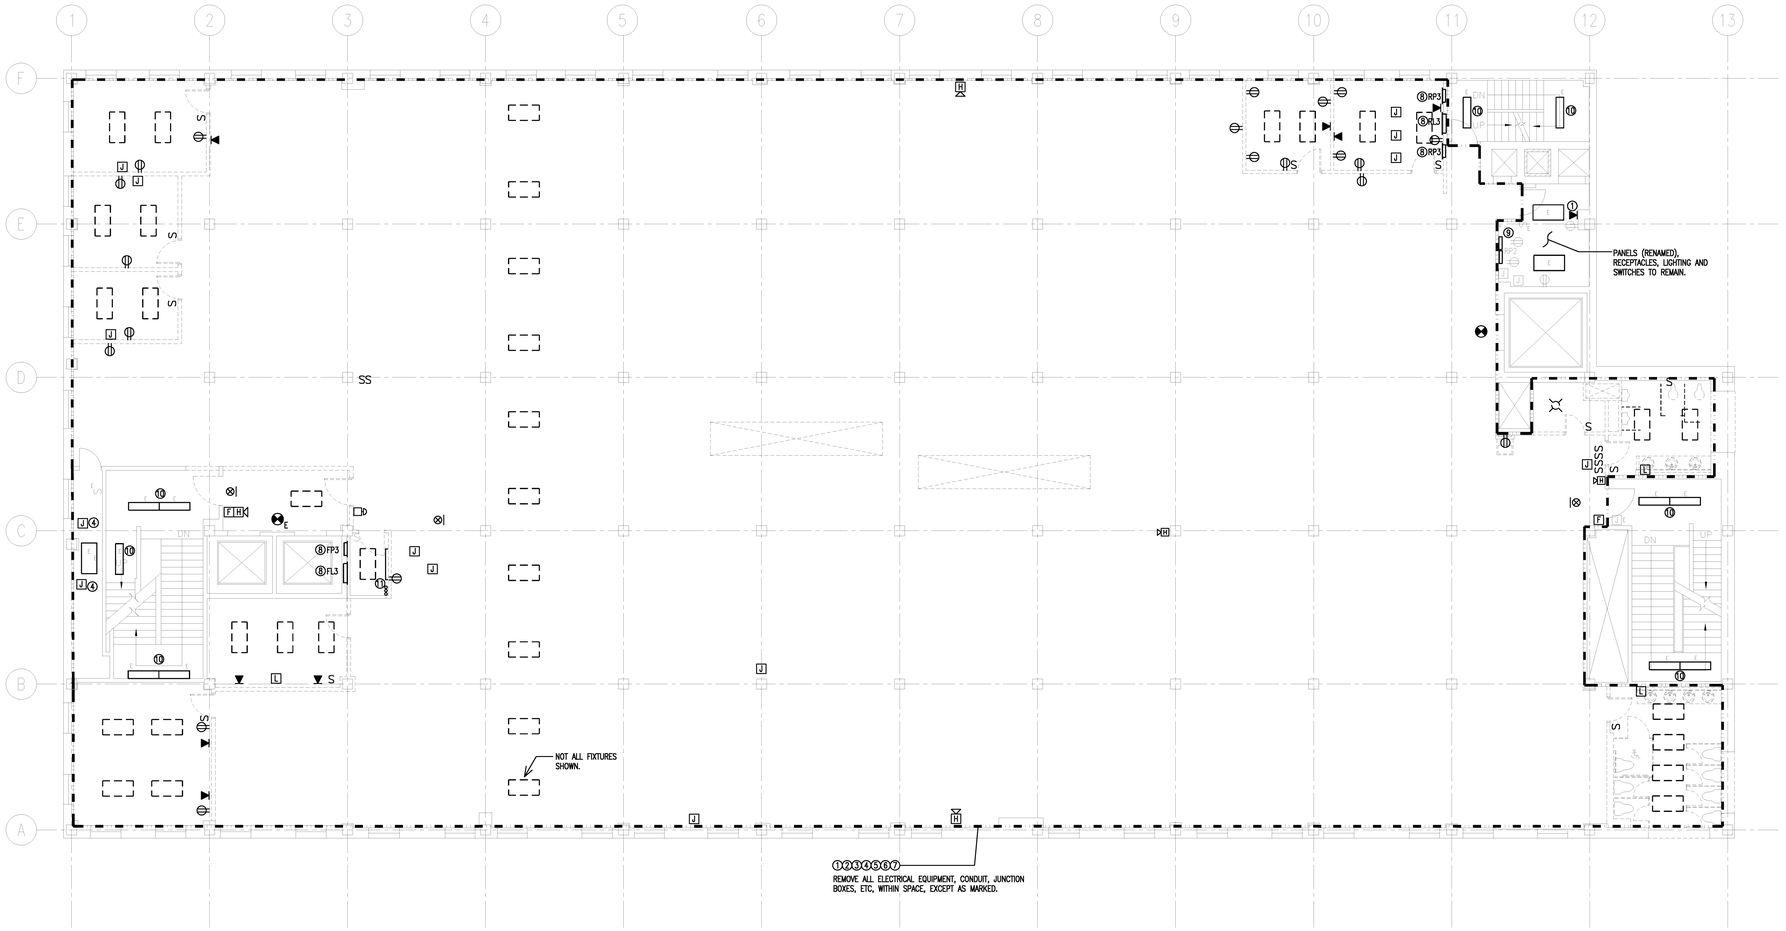

DEMOLITION KEY NOTES

1. REMOVE EXISTING JUNCTION BOXES, RECEPTACLES, TEL/DATA JACKS, CONDUIT AND CONDUCTORS BACK TO SOURCE.
2. REMOVE EXISTING JUNCTION BOXES, RECEPTACLES, CONDUIT AND CONDUCTORS FROM OLD FIRE ALARM SYSTEMS.
3. REMOVE EXISTING JUNCTION BOXES, CONDUIT AND CONDUCTORS FOR OLD CLOCK SYSTEM BACK TO SOURCE.
4. REMOVE EXISTING ABANDONED JUNCTION BOXES, CONDUIT AND CONDUCTORS MOUNTED ON CEILING/SLAB.
5. REMOVE EXISTING LIGHTING FIXTURES, SWITCHES, CONDUIT AND CONDUCTORS BACK TO SOURCE.
6. REMOVE EXISTING FIRE ALARM DEVICES, CONDUIT AND CONDUCTORS BACK TO SOURCE.
7. REMOVE EXISTING EXIT SIGN, CONDUIT AND CONDUCTORS BACK TO SOURCE.
8. REMOVE EXISTING ELECTRICAL PANEL, CONDUIT AND CONDUCTORS BACK TO SOURCE.
9. EXISTING PANELS REMAIN.
10. EXISTING STAIRWELL FIXTURES SHALL BE MADE OPERABLE. REPLACE BALLASTS AND PROVIDE NEW FLOURESCENT LAMPS AND LENSES WHERE NEEDED.
11. REMOVE EXISTING BACKBOARD, PUNCHDOWN BLOCKS AND COMMUNICATIONS CABLING BACK TO SOURCE.

DEMOLITION GENERAL NOTES

1. REMOVE ALL EXISTING NON METALLIC CABLE AND RELATED JUNCTION BOXES BACK TO SOURCE.
2. LOCATIONS AND QUANTITIES OF LIGHTING FIXTURES AND OTHER ELECTRICAL DEVICES ARE DERIVED FROM EXISTING DRAWINGS AND SITE OBSERVATIONS, NOT ALL LIGHT FIXTURES AND/OR ELECTRICAL DEVICES MAY BE SHOWN.
3. DEVICE/EQUIPMENT SHOWN WITH "E" IS EXISTING TO REMAIN.

HARRIMAN
Architects + Engineers
46 Harriman Drive
Auburn, ME 04210
207.784.5100 tel
63 Middle Street
Portland, ME 04101
207.775.0053 tel
One Perimeter Road
Manchester, NH 03103
603.626.1242 tel
www.harriman.com
© 2009

STATE OF MAINE · WILLIAM R. HARRIMAN · No. 7880 · LICENSED PROFESSIONAL ENGINEER

Project Title

110 FREE STREET BUILDING RENOVATIONS

PORTLAND, MAINE

HA Project No. 09146

Key Plan

Mark	Date	Description
	11/25/09	ISSUED FOR BID

Issue Dates

Drawing Status

Drawing Title

ELECTRICAL DEMOLITION SECOND FLOOR PLAN

PA / PE: WRH | Drawn By: RJB

Drawing Number

ED06.2