



DETAIL 1 1/2" = 1'-0"

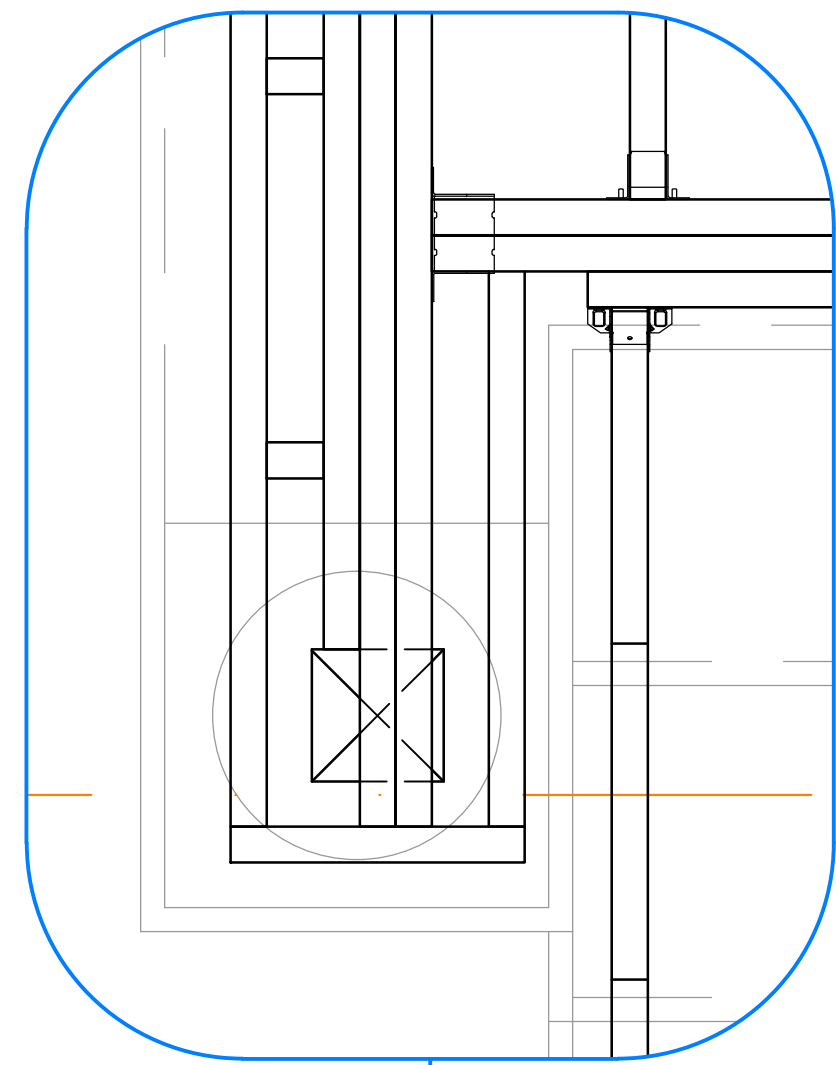



DETAIL 1 1/2" = 1'-0"

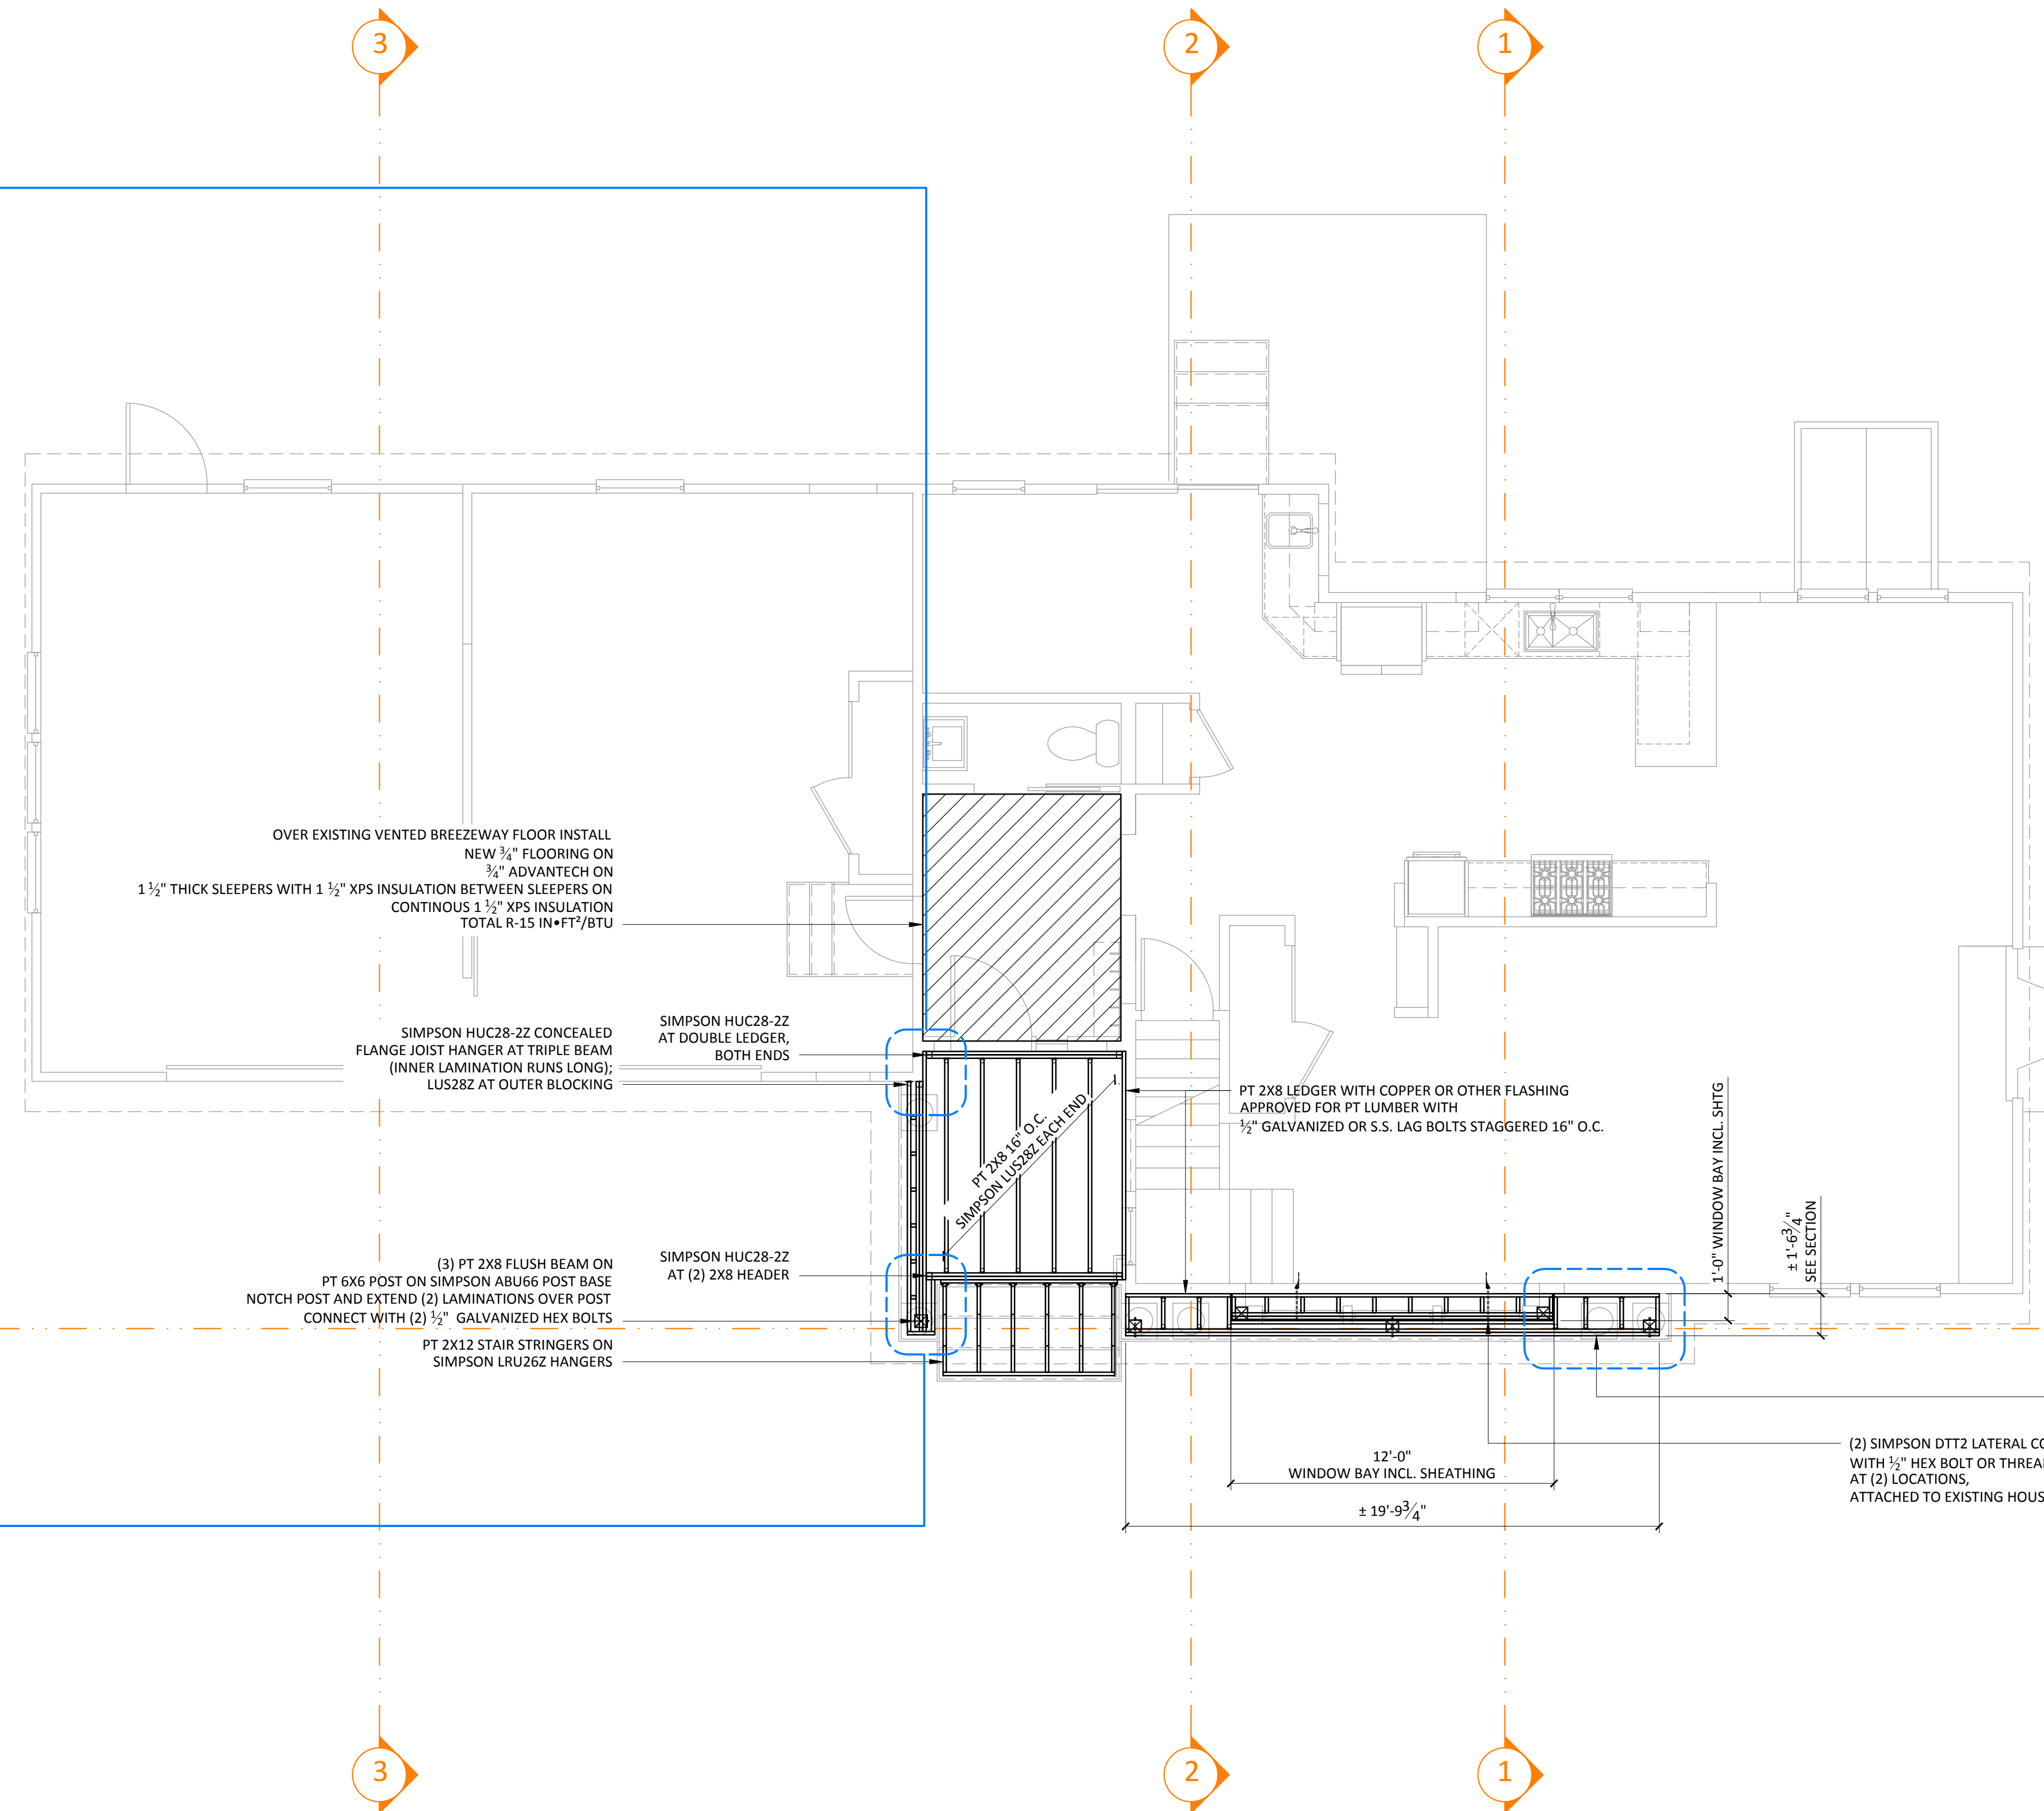

SINGLE JACK STUDS UNLESS NOTED OTHERWISE
 FRAMING LUMBER TO BE SPF #2&BTR
 LVL (LAMINATED VENEER LUMBER) MODULUS OF ELASTICITY =2,000,000 LBS/IN²
 GROUND SNOW LOAD 50 LBS/FT²
 LIVING AND BEDROOM FLOOR LIVE LOAD 40 LBS/FT², DEFLECTION LIMITED TO L/480
 ATTIC LIVE LOAD 20 LBS/FT², DEFLECTION LIMITED TO L/360
 ROOF DEFLECTION LIMITED TO L/240
 EXISTING WALLS FRAMED WITH 2X4'S 16" O.C.
 EXISTING ROOFS FRAMED WITH 2X8'S 16" O.C.
 EXISTING WINDOW AND EXTERIOR DOOR HEADERS (2) 2X10
 ALL FASTENERS, SCHEDULES AND TECHNIQUES TO MEET MUBEC (MAINE UNIFORM BUILDING AND ENERGY CODE) REQUIREMENTS

1 FIRST FLOOR FRAMING PLAN

1/4" = 1'-0"

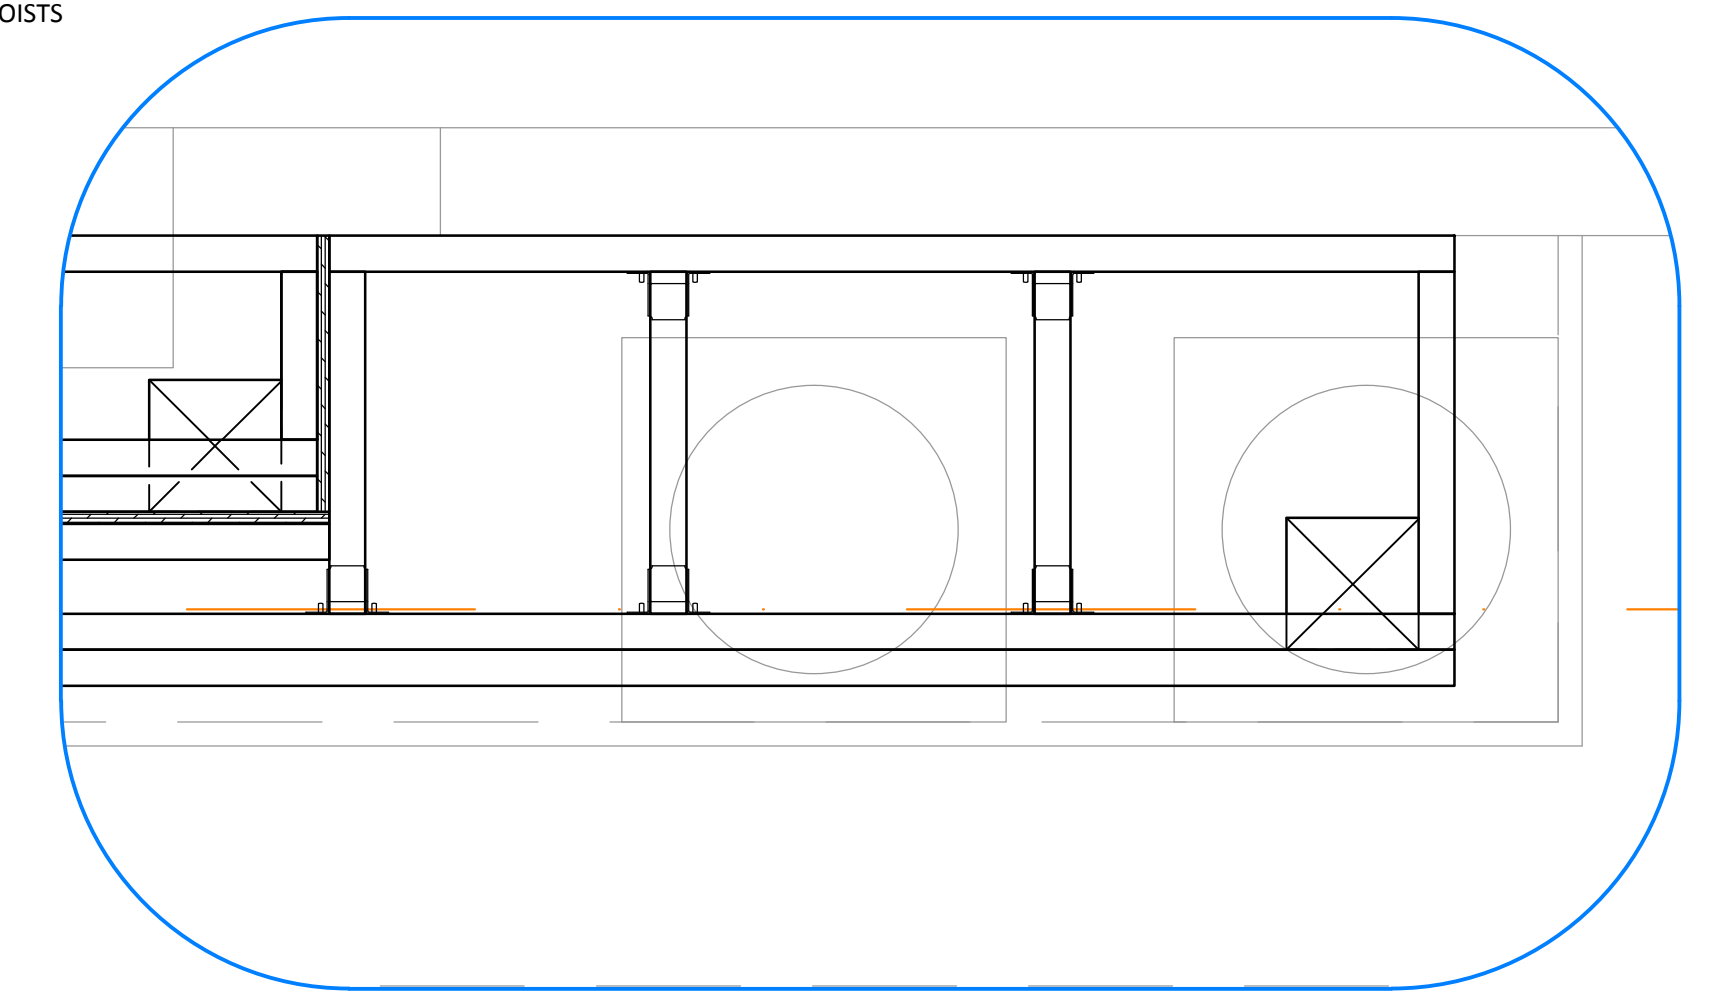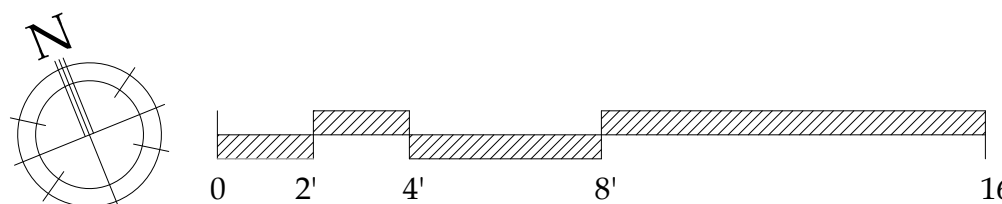

DETAIL 1 1/2" = 1'-0"