

1700, Setlakwe Street
Thefford Mines (QC) G6G 8B2
CANADA
www.technometalpost.com

CONFIDENTIAL

THE INFORMATIONS CONTAINED
IN THIS DRAWING IS THE SOLE
PROPERTY OF TECHNO PIEUX INC.
ANY REPRODUCTION IN PART OR
AS A WHOLE WITHOUT THE WRITTEN
PERMISSION OF TECHNO METAL POST INC.
IS PROHIBITED

REVISIONS

DATE	DESCRIPTION	REV.

Client :

Client adress :

Project :

Drawing :
**Techno Metal Post
Model P3
(Above ground light
structure)**



Approved by :

Date :
2011-10-31

Scale :
N/A

Drawing no:
P3-G-R0-A-USA

Page number :
SHEET 1 OF 1

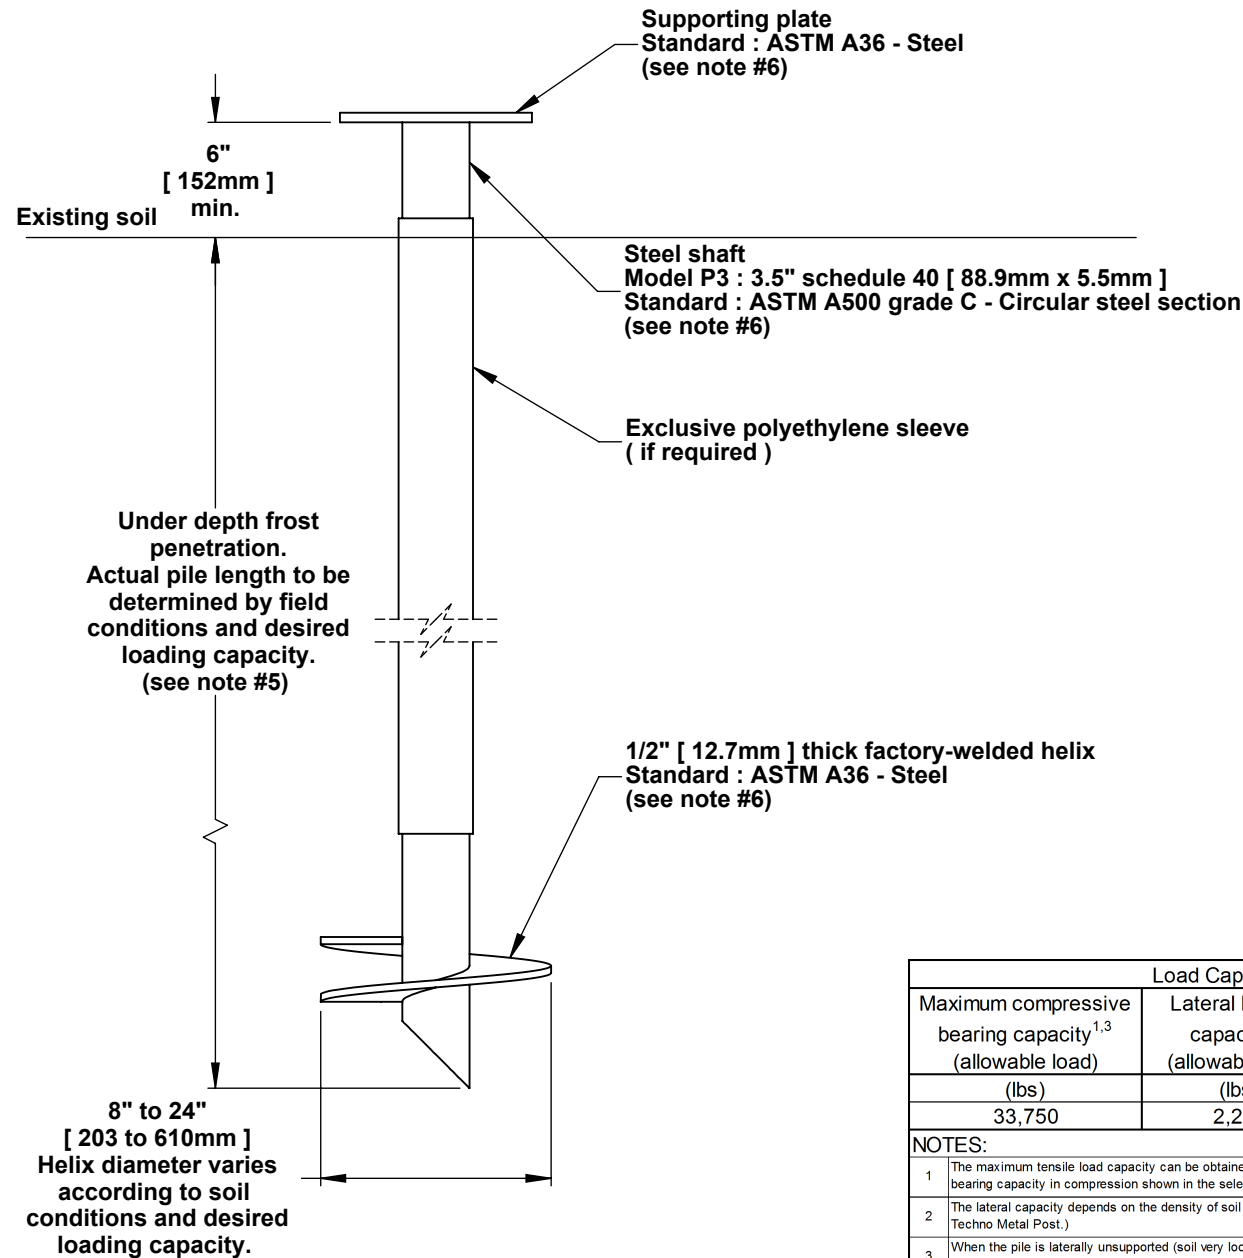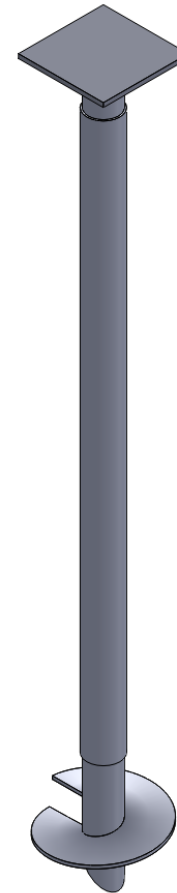

Load Capacity		
Maximum compressive bearing capacity ^{1,3} (allowable load)	Lateral bearing capacity ^{2,4} (allowable load)	Factored bending resistance (ultimate load)
(lbs)	(lbs)	(lbs.ft)
33,750	2,250	6,454

- NOTES:**
- The maximum tensile load capacity can be obtained, conservatively, by halving the values of the bearing capacity in compression shown in the selection table.
 - The lateral capacity depends on the density of soil (to validate consult technical department of Techno Metal Post.)
 - When the pile is laterally unsupported (soil very loose / soft, liquefiable soils, water and air), the structural strength of the pile must be approved by the technical department of Techno Metal Post.
 - The values of lateral capacity are average values and can be modified, more or less, depending on the characteristics of the existing soil.
 - If required, piles may be field welded with extensions to achieve greater loading capacities in poor soil conditions.
 - If required, the helical pile and the supporting plate can be galvanized in compliance with standard ASTM A123