## City of Portland, Maine – Building or Use Permit Application 389 Congress Street, 04101, Tel: (207) 874-8703, FAX: 874-8716

Location of Construction:	Owner:	Phone:	1	Permit No:
Owner Address:	Lessee/Buyer's Name:	Phone: Busines	ssName:	- 980426
Contractor Name: Charles Portin	Address: 1125 Forest Altrue	Phone: 871 7929		Permersyner ISSUED
Past Use:	Proposed Use:	COST OF YOKK:	PERMIT FEE:	APR 2 9 1998
mixed use (residential - póffce)		FIRE DEPT.  Approved Denied	INSPECTION: Use Group: Type:	Zone, CBL: PORTLAND
Proposed Project Description:		Signature: PEDESTRIAN ACTIVITII	Signature: ES DISTRICT (P.A.D.)	Zoning Approval:
landing steps & Ence Wall		Action: Approved Approved Denied	with Conditions:	Shoreland U Wetland Flood Zone
Permit Taken By:	Date Applied For:	Signature:	Date:	Subdivision
<ol> <li>Judy Laplante</li> <li>This permit application does not preclude</li> <li>Building permits do not include plumbing</li> <li>Building permits are void if work is not station may invalidate a building permit and</li> </ol>	z, septic or electrical work. arted within six (6) months of the date of			Zoning Appeal Carlot Science Conditional Use Conditional Use Interpretation Approved Denied Historic Preservation
		PERMI WITH REQU	T ISSUED UIREMENTS	<ul> <li>☐ Not in District or Landmark</li> <li>☐ Does Not Require Review</li> <li>☐ Requires Review</li> <li>Action:</li> </ul>
I hereby certify that I am the owner of record o authorized by the owner to make this applicati if a permit for work described in the applicatio areas covered by such permit at any reasonabl	on as his authorized agent and I agree to n is issued, I certify that the code officia	d work is authorized by the owner of conform to all applicable laws of the l's authorized representative shall ha	record and that I have been his jurisdiction. In addition	Denied
SIGNATURE OF APPLICANT	ADDRESS:	DATE:	PHONE:	-
RESPONSIBLE PERSON IN CHARGE OF W	ORK, TITLE		PHONE:	
	–Permit Desk Green– <mark>Assessor's</mark> C	anary–D.P.W. Pink–Public File		

nerth .					Date
Objeks with completed & appears to met permit requeries	Perut # 980436 CBUH 180-A-01	Josand	DEPT OF BUT DOLLE	an In	Type       Foundation:       Framing:       Framing:       Final:       Other:

· COMMENTS .

Date: 4 Applicant: Charles 7 Address: 205 Ludlow C-B-L: CHECK-LIST AGAINST ZONING ORDINANCE - use of per microf 1952 Date - This Zone Location - K-3 Interior fr corner lot - ) cor of 2-8 Fulla Proposed Use/Work -Servage Disposal -Lot Street Frontage -2414"+ 8"=25 Front Yard - 25'reg - 25'Show Rear Yard - NA Side Yard - g'seg - 11' Sho Projections -Width of Lot -Height -95999 Lot Aren -Lot Coverage/ Impervious Surface -Area per Family -Off-street Parking -Loading Bays -Site Plan -Shoreland Zoning/ Stream Protection -Flood Plains -

	BUILDING PERMIT REPORT				
DATE	: 29/APri/98 ADDRESS: 205 Ludow ST 180-A-001				
	ON FOR PERMIT: Landing STeps & Knee Wall				
	DING OWNER: Group MAIN				
	RACTOR: Charles Fortin				
	$\wedge$				
PERM	IT APPLICANT:				
USE G	BOCA 1996 CONSTRUCTION TYPE 5.6				
	CONDITION(S) OF APPROVAL				
This P	ermit is being issued with the understanding that the following conditions are met:				
Appro	oved with the following conditions: $\frac{\times}{1}$ , $\frac{\times}{2}$ , $\frac{\times}{2}$ , $\frac{\times}{10}$ , $\frac{\times}{10$				
$\mathbf{x}_{1}$	This permit does not excuse the applicant from meeting applicable State and Federal rules and laws.				
£2.	Before concrete for foundation is placed, appro <del>vals from the Development Review Coordinator and</del> Inspection Services must be obtained. (A 24 hour notice is required prior to inspection)				
3.	Precaution must be taken to protect concrete from freezing.				
4.	It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to				
-	verify that the proper setbacks are maintained.				
a 5.	Private garages located <u>beneath habitable rooms</u> in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting				
	rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior				
	spaces and the attic area by means of 1/2 inch gypsum board or the equivalent applied to the garage means of 1/2 inch gypsum				
	board or the equivalent applied to the garage side. (Chapter 4 Section 407.0 of the BOCA/1996)				
6.	6. All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA Nationa Mechanical Code/1993).				
7.	<ol> <li>Sound transmission control in residential building shall be done in accordance with Chapter 12 section 1214.0 of the city's building code.</li> </ol>				
× 8.	X-8. Guardrails & Handrails: A guardrail system is a system of building components located near the open sides of elevated walking				
/ \	surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum				
	height all Use Groups 42", except Use Group R which is 36". In occupancies in Use Group A, B, H-4, I-1, I-2 M and R and				
	public garages and open parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would provide a ladder effect				
	(Handrails shall be a minimum of 34" but not more than 38". Use Group R-3 shall not be less than 30", but not more than 38".)				
	Handrail grip size shall have a circular cross section with an outside diameter of at least 1 1/4" and not greater than 2".				
9.	Headroom in habitable space is a minimum of 7'6"				
× 10.	Stair construction in Use Group R-3 & R-4 is a minimum of 10" tread and 7 3/4" maximum rise. All other Use group minimum 11" tread. 7" maximum rise.				
Ι1.	The minimum headroom in all parts of a stairway shall not be less than 80 inches. (6' 8'')				
12.	Every sleeping room below the fourth story in buildings of use Groups R and I-1 shall have at least one operable window or				
	exterior door approved for emergency egress or rescue. The units must be operable from the inside without the use of special				
	knowledge or separate tools. Where windows are provided as <u>means of egress or rescue</u> they shall have a sill height not more				
	than 44 inches (1118mm) above the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches (610mm). The minimum net clear opening width dimension shall be 20 inches (508mm),				
	and a minimum net clear opening of 5.7 sq. ft.				
13	Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it				
17	exits directly from the apartment to the building exterior with no communications to other apartment units.				
14.	All vertical openings shall be enclosed with construction having a fire rating of at lest one (1)hour, including fire doors with self closer's. (Over 3 stories in height requirements for fire rating is two (2) hours.)				
15.	The boiler shall be protected by enclosing with (1) hour fire-rated construction including fire doors and ceiling, or by providing				
	automatic extinguishment.				
16.	All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the				

provisions of the City's Building Code Chapter 9, Section 19, 920.3.2 (BOCA National Building Code/1996), and NFPA 101 Chapter 18 & 19. (Smoke detectors shall be installed and maintained at the following locations):

- In the immediate vicinity of bedrooms
- In all bedrooms
- In each story within a dwelling unit, including basements

In addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and I-1 shall receive power from a battery when the AC primary power source is interrupted. (Interconnection is required)

- 17. A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved type.
- 18. The Fire Alarm System shall be maintained to NFPA #72 Standard.
- 19. The Sprinkler System shall maintained to NFPA #13 Standard.
- 20. All exit signs, lights, and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023. & 1024. Of the City's building code. (The BOCA National Building Code/1996)
- 21. Section 25-135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year".
- 22. The builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a certification from a design professional that the plans commencing construction of the facility, the builder shall submit the certification to the Division of Inspection Services.
- 23. Ventilation shall meet the requirements of Chapter 12 Sections 1210. Of the City's Building Code.
- 24. All electrical, plumbing and HVAC permits must be obtained by a Master Licensed holders of their trade.
- 25. All requirements must be met before a final Certificate of Occupancy is issued.
- 26. All building elements shall meet the fastening schedule as per Table 2305.2 of the City's Building Code. (The BOCA National Building Code/1996).
- 27. Ventilation of spaces within a building shall be done in accordance with the City's Mechanical Code (The BOCA National Mechanical Code/1993).
- 28. Please read and implement the attached Land Use-Zoning report requirements.

30.


29.

31.

32.

amuti Honser. Code Enforcement

cc: Lt. McDougall, FFD Marge Schmuckal

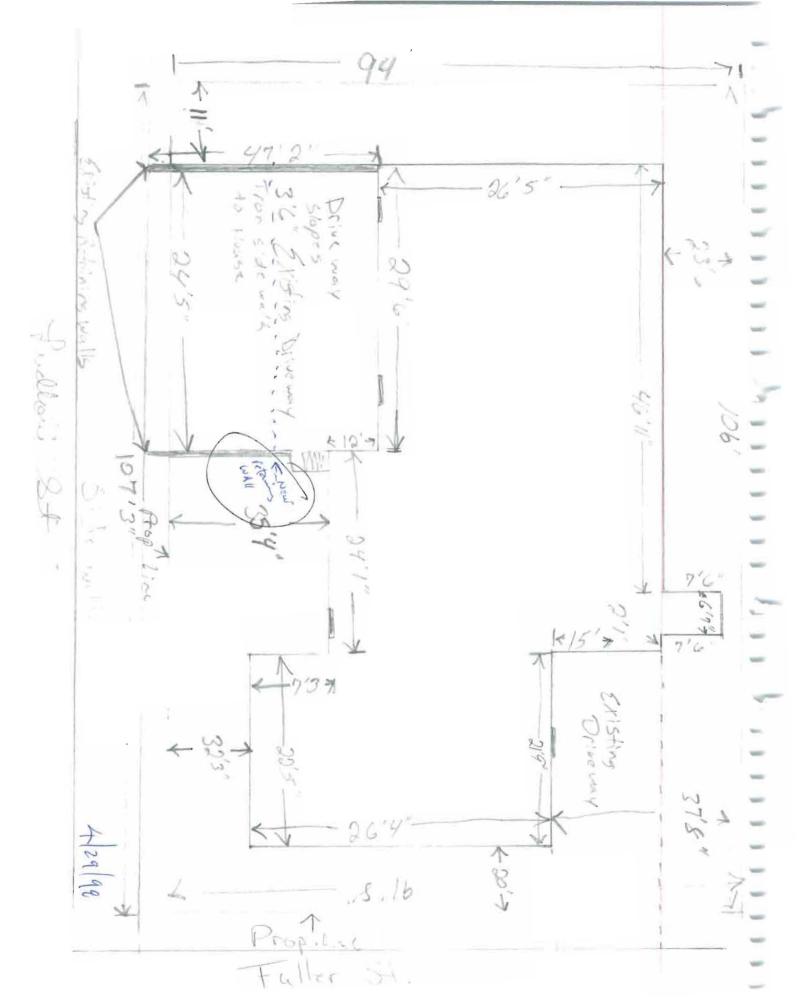

d to bolt plation mainted Rod Relaining Wall will-Ground Level 3 3 - form 12 - 13 - 14e Pt Post 484 Rail + 1 be 35% H. Grown level Pt 2X4 Side ways & or mode wint on Center Hard Rail will States are 3 wide 444 12-Railing Tread 5 steps 1 4/29/98 1

JOB NAME/NUMBER Group Main Steen JOB LOCATION 205 Ludlow St CALCULATED BY DATE Judlan St Sidewalk SCALE 11 to Prop Marker 10' Pitch drive Howards 24'4" 27' & Retaning Wall w Repairs 114013 42 x22' Picket Fencer on Retaining Wall mounted on 4"x4" Pt post S "Hand office from # LS11 The Drawing Board, Dallas, Texas 75266-0429

JOB NAME/NUMBER Group Main Stran JOBLOCATION 205 Luclow St CALCULATED BY DATE SCALE

