BUILDING PERMIT APPLICATION Fee Zone____ Permit # City of Please fill out any part which applies to job. Proper plans must accompany form. Owner: ______ Phone #_____ For Official Use Only Address: Subdivision: Inside Fire Limits_____ LOCATION OF CONSTRUCTION Contractor:_____Sub.:____ Bldg Code_____ Ownership: Time Limit_____ __ Private Address: Phone # Phone # Estimated Cost_____ Est. Construction Cost: Proposed Use: Zoning: Street Frontage Provided: ________ Back _______ Side _____ Side ______ Side _____ Side ______ Side _____ Side ______ Side _____ Side _____ Side _____ Side _____ Side _____ Side ______ Side ______ Side ______ Side ______ Side _____ Side ______ Sid _____ Past Use:_____ # of Existing Res. Units_____ # of New Res. Units____ Review Required: Zoning Board Approval: Yes____ No ___ Date:___ Building Dimensions L_____W___Total Sq. Ft._____ Planning Board Approval: Yes____ No ____ Date: ____ # Stories:_____ # Bedrooms_____ Lot Size: Conditional Use: Variance Site Plan Subdivision Shoreland Zoning Yes No Floodplain Yes No No Is Proposed Use: Seasonal Condominium Conversion Special Exception Explain Conversion Other (Explain) Ceiling: 1. Ceiling Joists Size:

2. Ceiling Strapping Size

3. Type Ceilings:

HISTORIC PRESERVATION

Spacing

Not in District nor Landmark Foundation: 1. Type of Soil: 2. Set Backs - Front ______ Rear _____ Side(s) _____ Size Does not require review. 3. Footings Size: 4. Insulation Type 4. Foundation Size: 5. Ceiling Height: 5. Other _____ Roof: 1. Truss or Rafter Size_____ 2. Sheathing Type _____ Approved. Floor: 3. Roof Covering Type ______Approved with Conditions. 1. Sills Size: _____ Sills must be anchored. Size: Chimnevs: 2. Girder Size: Girder Size:
 Lally Column Spacing: ______ Type:_____ Number of Fire Places 4. Joists Size:

5. Bridging Type:

6. Floor Sheathing Type:

Size:

Spacing 16" O.C.

Size: Heating: Type of Heat:_____ Size: Electrical: Service Entrance Size: Smoke Detector Required Yes____No____ 7. Other Material: Plumbing: 1. Approval of soil test if required Yes No_____ **Exterior Walls:** 2. No. of Tubs or Showers 1. Studding Size Spacing 3. No. of Flushes 2. No. windows 3. No. Doors 4. No. of Lavatories 5 No. of Other Fixtures

 4. Header Sizes
 Span(s)

 5. Bracing:
 Yes

 Swimming Pools: 1. Type:

2. Pool Size:

3. Must conform to National Electrical Code and State Law. 6. Corner Posts Size _____ 7. Insulation Type Size 8. Sheathing Type Size 9. Siding Type _____ Weather Exposure____ Permit Received by _______

CEOMOSTICE

CE Permit Received By 10. Masonry Materials 11. Metal Materials Interior Walls:

 1. Studding Size
 Spacing

 2. Header Sizes
 Span(s)

 3. Wall Covering Type CONTINUED OF REVERSE SIDE 4. Fire Wall if required_____ 5. Other Materials _____

White - Tax Assessor

Ivory Tag - CEO

PLOT PLAN		
1		
Base Fee \$ Subdivision Fee \$ Site Plan Review Fee \$	kdown From Front) But 10/15	Inspection Record Type Date Solis Complete 6 79 9 A Deck incomplete Pade Mr. Captale
owner to make this application as has aut	horized agent and I agree to conform to all applicable law e official or the code official's authorized representative s	thorized by the owner of record and that I have been authorized by the vs of this jurisdiction. In addition, if a permit for work described in this shall have the authority to enter areas covered by such permit at any
SIGNATURE OF APPLICANT	ADDRESS	PHONE NO.
RESPONSIBLE PERSON IN CHARGE OF WORK, 1	TTLE	PHONE NO.

designed and constructed to comply with all of the requirements of this code for on-site and prefabricated construction.

- 420.2 Construction: Residential mobile units shall be of an approved design and shall be constructed in accordance with the applicable ordinances and statutes. All other mobile units shall be designed and constructed in accordance with the requirements of this code. All mobile units on a permanent foundation shall be evaluated, inspected and *labeled* in plant in accordance with Section 1703.3.
- **420.3 Location:** Mobile units shall be located in approved spaces. The provisions of this code shall not be construed to repeal, modify or constitute an alternative to any lawful *zoning* regulations. In case of conflict between this code and any other ordinance or statute, the most rigid requirements shall apply.
 - 420.3.1 Anchorage and tie-down: Every parking space for mobile units shall be provided with devices for anchoring the unit to prevent overturning or uplift. The owner of the parking space shall anchor or cause to be anchored all mobile units located on the parking space. Where concrete platforms are provided for the parking of mobile units, anchorage shall be provided by cyclets embedded in the concrete with adequate anchor plates or hooks, or other suitable means. The anchorage shall be adequate to withstand wind forces and uplift as required in Chapter 16 for buildings and structures, based upon the size and weight of the units.

SECTION 421.0 SWIMMING POOLS

- 421.1 General: Swimming and bathing pools shall conform to the requirements of this section provided that these regulations shall not be applicable to any such pool less than 24 inches (610 mm) deep or having a surface area less than 250 square feet (23.25 m²), except where such pools are permanently equipped with a water-recirculating system or involve structural materials. For the purposes of this code, pools are classified as private swimming pools or public swimming pools, as defined in Section 421.2. Materials and constructions used in swimming pools shall comply with the applicable requirements of this code.
- **421.2 Definitions:** The following words and terms shall, for the purposes of this section and as used elsewhere in this code, have the meanings shown herein.

Pools, swimming, hot tubs and spas

Above-ground/on-ground pool: See definition of private swimming pool.

Barrier: A fence, a wall, a building wall or a combination thereof which completely surrounds the swimming pool and obstructs access to the swimming pool.

Hot tub: See definition of private swimming pool.

In-ground pool: See definition of private swimming pool. Private swimming pool: Any structure that contains water over 24 inches (610 mm) in depth and which is used, or intended to be used, for swimming or recreational bathing in connection with an occupancy in Use Group R-3 and which is available only to the family and guests of the householder. This includes in-ground, above-ground and on-ground swimming pools, hot tubs and spas.

Private swimming pool, indoor: Any private swimming pool that is totally contained within a private structure and surrounded on all four sides by walls of said structure.

Private swimming pool, outdoor: Any private swimming pool that is not an indoor pool.

Public swimming pool: Any swimming pool other than a private swimming pool.

Spa: See definition of private swimming pool.

- 421.3 Permits and construction documents: A swimming pool or appurtenances thereto shall not be constructed, installed, enlarged or *altered* until *construction documents* have been submitted and a permit has been obtained from the code official. The approval of all city, county and state authorities having jurisdiction over swimming pools shall be obtained before applying to the code official for a permit. Certified copies of these approvals shall be filed as part of the supporting data for the permit application.
 - 421.3.1 Construction documents: Construction documents shall accurately show dimensions and construction of the pool and appurtenances and properly established distances to lot lines, buildings, walks and fences, as well as details of the water supply system, drainage and water disposal systems, and all appurtenances pertaining to the swimming pool. Detailed construction documents of structures, vertical elevations and sections through the pool showing depth shall be included.
- 421.4 Locations: Private swimming pools shall not encroach on any front or side yard required by this code or by the governing zoning law, unless in accordance with specific rules of the jurisdiction in which the pool is located. A wall of a swimming pool shall not be located less than freet (1829 mm) from any rear or side property line or 10 feet (3048 mm) from any street property line, unless in accordance with specific rules of the jurisdiction in which the pool is located.
- **421.5 Structural design:** The pool structure shall be engineered and designed to withstand the expected forces to which the pool will be subjected.
 - 421.5.1 Wall slopes: To a depth up to 2 feet 9 inches (838 mm) from the top, the wall slope shall not be more than one unit horizontal in five units vertical (1:5).
 - 421.5.2 Floor slopes: The slope of the floor on the shallow side of the transition point shall not exceed one unit vertical to seven units horizontal (1:7). For public pools greater than 1,200 square feet (111.6 m²), the slope of the floor on the shallow side of the transition point shall not exceed one unit vertical to ten units horizontal (1:10). The transition point between shallow and deep water shall not be more than 5 feet (1524 mm) deep.
 - 421.5.3 Surface cleaning: All swimming pools shall be provided with a recirculating skimming device or overflow gutters to remove scum and foreign matter from the surface of the water. Where skimmers are used for private pools, there shall be at least one skimming device for each 1,000 square feet (93 m²) of surface area or fraction thereof. For public pools where water skimmers are used, there shall be at least one skimming device for each 600 square feet (55.8 m²) of

etal addi combine at ili ne.

- 421.5.4 Walkways: All public swimming pools shall have walkways not less than 4 feet (1219 mm) in width extending entirely around the pool. Curbs or sidewalks around any swimming pool shall have a slip-resistant surface for a width of not less than 1 foot (305 mm) at the edge of the pool, and shall be so arranged as to prevent return of surface water to the pool.
- 421.5.5 Steps and ladders: At least one *means of egress* shall be provided from private pools. Public pools shall provide ladders to other *means of egress* at both sides of the diving section and at least one *means of egress* at the shallow section; or at least one *means of egress* in the deep section and the shallow section if diving boards are not provided. Treads of steps and ladders shall have slip-resistant surfaces and handrails on both sides, except that handrails are not required where there are not more than four steps or where the steps extend the full width of the side or end of the pool.
- **421.6 Water supply:** All swimming pools shall be provided with a potable water supply, free of cross connections with the pool or its equipment.
 - 421.6.1 Water treatment: Public swimming pools shall be designed and installed so that there is a pool water turnover at least once every 8 hours. Filters shall not filter water at a rate in excess of 3 gallons per minute per square foot (0.0020 m³/s · m²) of surface area. The treatment system shall be designed and installed so that at all times when the pool is occupied, the water is provided with excess chlorine of not less than 0.4 parts per million (ppm) or more than 0.6 ppm, or excess chloramine between 0.7 and 1.0 ppm, or disinfection shall be provided by other approved means. Acidity/alkalinity of the pool water shall not be below 7.0 or more than 7.5. All recirculating systems shall be provided with an approved hair and lint strainer installed in the system ahead of the pump.

Private swimming pools shall be designed and installed so that there is a pool water turnover at least once every 18 hours. Filters shall not filter water at a rate in excess of 5 gallons per minute per square foot (0.0034 m³/s·m²) of surface area. The pool owner shall be instructed in the care and maintenance of the pool by the supplier or builder, including treatment with high-test calcium hypochlorite (dry chlorine), sodium hypochlorite (liquid chlorine) or equally effective germicide and algicide, and the importance of proper pH (alkalinity and acidity) control.

- 421.6.2 Drainage systems: The swimming pool and equipment shall be equipped to be emptied completely of water and the discharged water shall be disposed of in an approved manner that will not create a nuisance to adjoining property.
- **421.7 Appurtenant structures:** All *appurtenant structures*, installations and equipment, such as showers, dressing rooms, equipment houses or other buildings and structures, including

plumbing, heating and air conditioning systems, shall comply with all applicable requirements of this code.

- **421.7.1** Accessories: All swimming pool accessories shall be designed, constructed and installed so as not to be a safety hazard. Installations or structures for diving purposes shall be properly anchored to insure stability.
- 421.8 Equipment installations: Pumps, filters and other mechanical and electrical equipment for public swimming pools shall be enclosed in such a manner as to provide access only to authorized persons and not to bathers. Construction and drainage shall be arranged to avoid the entrance and accumulation of water in the vicinity of electrical equipment.
- **421.9** Enclosures for public swimming pools: Public swimming pools shall be provided with an enclosure surrounding the pool area. The enclosure shall meet the provisions of Sections 421.9.1 through 421.9.3.
 - **421.9.1 Enclosure:** The enclosure shall extend not less than 4 feet (1219 mm) above the ground. All gates shall be self-closing and self-latching with latches placed at least 4 feet (1219 mm) above the ground.
 - 421.9.2 Construction: Enclosure fences shall be constructed so as to prohibit the passage of a sphere larger than 4 inches (102 mm) in diameter through any opening or under the fence. Fences shall be designed to withstand a horizontal concentrated *load* of 200 pounds (91 kg) applied on a 1-square-foot (0.093 m²) area at any point of the fence.
 - 421.9.3 Alternative devices: A natural barrier, pool cover or other protective device approved by the governing body shall be an acceptable enclosure as long as the degree of protection afforded by the substituted device or structure is not less than the protection afforded by the enclosure, gate and latch described herein.
- **421.10** Enclosures for private swimming pools, spas and hot tubs: Private swimming pools, spas and hot tubs shall be enclosed in accordance with Sections 421.10.1 through 421.10.4 or by other approved barriers.
 - **421.10.1 Outdoor private swimming pool:** An outdoor private swimming pool, including an in-ground, aboveground or on-ground pool, hot tub or spa shall be provided with a barrier which shall comply with the following.
 - 1. The top of the barrier shall be at least 48 inches (1219 mm) above finished ground level measured on the side of the barrier which faces away from the swimming pool. The maximum vertical clearance between finished ground level and the barrier shall be 2 inches (51 mm) measured on the side of the barrier which faces away from the swimming pool. Where the top of the pool structure is above finished ground level, such as an above-ground pool, the barrier shall be at finished ground level, such as the pool structure, or shall be mounted on top of the pool structure. Where the barrier is mounted on top of the pool structure, the maximum vertical clearance between the top of the pool structure and the bottom of the barrier shall be 4 inches (102 mm).

- 2. Openings in the barrier shall not allow passage of a 4-inch (102 mm) diameter sphere.
- 3. Solid barriers shall not contain indentations or protrusions except for normal construction tolerances and tooled masonry joints.
- 4. Where the barrier is composed of horizontal and vertical members and the distance between the tops of the horizontal members is less than 45 inches (1143 mm), the horizontal members shall be located on the swimming pool side of the fence. Spacing between vertical members shall not exceed 13/4 inches (44 mm) in width. Decorative cutouts shall not exceed 13/4 inches (44 mm) in width.
- 5. Where the barrier is composed of horizontal and vertical members and the distance between the tops of the horizontal members is 45 inches (1143 mm) or more, spacing between vertical members shall not exceed 4 inches (102 mm). Decorative cutouts shall not exceed 13/4 inches (44 mm) in width.
- 6. Maximum mesh size for chain link fences shall be a 11/4-inch (32 mm) square unless the fence is provided with slats fastened at the top or the bottom which reduce the openings to not more than 13/4-inches (44 mm).
- 7. Where the barrier is composed of diagonal members, such as a lattice fence, the maximum opening formed by the diagonal members shall be not more than 13/4 inches (44 mm).
- 8. Access gates shall comply with the requirements of items 1 through 7 of Section 421.10.1, and shall be equipped to accommodate a locking device. Pedestrian access gates shall open outwards away from the pool and shall be self-closing and have a self-latching device. Gates other than pedestrian access gates shall have a self-latching device. Where the release mechanism of the self-latching device is located less than 54 inches (1372 mm) from the bottom of the gate: (a) the release mechanism shall be located on the pool side of the gate at least 3 inches (76 mm) below the top of the gate; and (b) the gate and barrier shall not have an opening greater than ½ inch (13 mm) within 18 inches (457 mm) of the release mechanism.
- 9. Where a wall of a dwelling serves as part of the barrier, one of the following shall apply:
 - 9.1. All doors with direct access to the pool through that wall shall be equipped with an alarm which produces an audible warning when the door and its screen, if present, are opened. The alarm shall sound continuously for a minimum of 30 seconds immediately after the door is opened. The alarm shall have a minimum sound pressure rating of 85 dBA at 10 feet (3048 mm) and the sound of the alarm shall be distinctive from other household sounds such as smoke alarms, telephones and door bells. The alarm shall automatically reset under all conditions. The alarm shall be equipped with manual means, such as touchpads or switches, to deactivate temporarily the alarm for a single opening from either direc-

- tion. Such deactivation shall last for not more than 15 seconds. The deactivation touchpads or switches shall be located at least 54 inches (1372 mm) above the threshold of the door.
- 9.2. The pool shall be equipped with an approved power safety cover.
- 10. Where an above-ground pool structure is used as a barrier or where the barrier is mounted on top of the pool structure, and the means of access is a fixed or removable ladder or steps, the ladder or steps shall be surrounded by a barrier which meets the requirements of items 1 through 9 of Section 421.10.1. A removable ladder shall not constitute an acceptable alternative to enclosure requirements.
- 421.10.2 Indoor private swimming pool: All walls surrounding an indoor private swimming pool shall comply with Section 421.10.1, item 9.
- **421.10.3 Prohibited locations:** Barriers shall be located so as to prohibit permanent structures, equipment or similar objects from being used to climb the barriers.
- **421.10.4** Exemptions: The following shall be exempt from the provisions of this section.
 - 1. A spa or hot tub with an approved safety cover.
 - 2. Fixtures which are drained after each use.

421.11 Diving boards: Minimum water depths and distances for diving hoppers for pools, based on board height above water, shall comply with Table 421.11(1) for public pools and Table 421.11(2) for private pools.

The maximum slope permitted between point D_2 and the transition point shall not exceed one unit vertical to three units horizontal (1:3) in private and public pools. D_1 is the point directly under the end of the diving boards. D_2 is the point at which the floor begins to slope upwards to the transition point. See Figure 421.11.

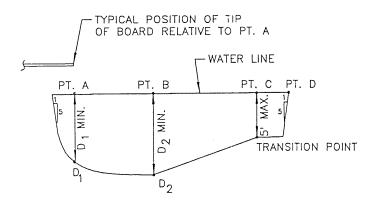


Figure 421.11
MINIMUM WATER DEPTHS AND DISTANCES BASED ON BOARD
HEIGHT FOR PUBLIC AND PRIVATE PCOLS

Table 421.11(1)
MINIMUM WATER DEPTHS AND DISTANCES BASED ON BOARD
HEIGHT FOR PUBLIC POOLS

Board height	Minimum depth ^a at D ₁ directly under end of board	Distance ^a between D ₁ and D ₂	Minimum depth ^a at D ₂
2'2"(43 meter)	7′0″	8′0″	8′6″
2'6" (34 meter)	7′6″	9′0″	9′0″
1 meter	8′6″	10′0″	10′0″
3 meter	11′0″	10′0″	12′0″

Note a. 1 foot = 304.8 mm.

Table 421.11(2) MINIMUM WATER DEPTHS AND DISTANCES BASED ON BOARD HEIGHT FOR PRIVATE POOLS

Board height	Minimum depth ^a at D ₁ directly under end of board	Distance ^a between D ₁ and D ₂	Minimum deptha at D ₂
1'8"(1/2 meter)	6′0″	7′0″	7′6″
2'2" (2/3 meter)	6′10″	7′6″	8′0″
2'6" (3/4 meter)	7′5″	8′0″	8′0″
3'4" (1 meter)	' 8′6″	9′0″	9′0″

Note a. 1 foot = 304.8 mm.



854-5006

797-9011

DAVE'S POOL SALES AND SERVICE, INC.




690 MAIN ST. WESTBROOK, MAINE 04092

	ABOVE GROUND P	CLEANING	WESTBROOK, MAI	NE 04092
PROPOSAL SUBMITTED TO:	774-03	15 10 0000 PHONE	- / LWW	
- V dame (Covers		775-1996	4.19.	94
STREET		JOB NAME		
27 Yearn Tix.	ļ.			
CITY, STATE AND ZIP CODE	_ i	JOB LOCATION		
1- William 118. ()	4/00-			
We hereby submit specifications and estimates for:				
POOL SIZE AND STYLE: 97'		to the second		21/21 3
TOOL GIZE AND OTTEE.		MI SA		3400.00
FILTER:			7.	
	<u>aanaan tili ja makaan tikan tili laga kailiti.</u>	1 1 1 272 01	<u> W.C.</u>	
LADDER: 41- /10-18				
- A - Paralla alla -				
VACUUM KIT: (1) exict tid	- 61 - A25	W 1286 30	o' made	
	saas ta dha tibi aadaalaan aa aanaa aa aa aa ah ay baa'aa aa dhan dhiidada la aa a			
SKIMMER: Thouse autoli	1 de de	· was elli		
EXTRAS: To to to the total	11.32 24	5 12 11	1 Jan 20	
			The state of the s	
INSTALLATION, LABOR AND MATERIA	ALS:			The second secon
STATE TAX	$\neg G$			
J 41200 04	1012' 2.V.			
TOTAL:	W-19:1	11/		3400.00
2.3. 7.5.		U		
Me France hereby to furnish	sh material and labor	- complete in accordance with th	e above specifications.	for the sum of:
Three chargens From	Allen 1	2. 1109/.	SUM	v00 ,
Payment to be made as follows:	o A	1/2 / 1/2 / A	dollars (\$).
13 Journ 3 When a	<u> Alan L</u>	3 Who Le	ngall	
			<i>Y</i>	
All material is guaranteed to be as specified. All work to workmanlike manner according to standard practices. Any alter	erations or deviations	Authorized	m 181 2 1	A
from the above specifications involving extra costs will be execut orders, and will become an extra charge over and above the estin contingent upon strikes, accidents or delays beyond our control.	mate. All agreements	Signature Note: This proposal may	he A	4
wind damage and other necessary insurance. Our workers a Workman's Compensation Insurance.	are fully covered by	withdrawn by us if not accepted wit		days.
		a y pola	71.	
specifications and conditions are satisfactory and are hereby		Signature	1 14330	
authorized to do the work as specified. Payment will be made	as outlined above.	Signatura		







CITY OF PORTLAND

CERTIFICATE OF SETBACK REDUCTION

I, Marge Schmuckal , Zoning Administrator for the City of Portland, Cumberland County, State of Maine, hereby certify that on the
or Portland, Cumberland County, State of Maine, hereby certify that on the
6th day of November , 1996 , the following setback
reduction was granted pursuant to the provisions of section 14-437 of the
City of Portland's Land Use Code.
1. Property Owner: Peter A. Fitzpatrick
2. Address and Assessor's Chart, Block and Lot of subject property: 19 Jeanne Court, Portland, Maine 183-B-44
3. Property: Cumberland County Registry Book , Page . (Last recorded Deed in Chain of Title):
4. Setback Reduction Granted: This is to authorize a 7± foot setback in an R-3 Residential Zone where
an 8 foot side setback is required.
IN WITHESS WHEREOF, I have hereto set my hand and seal this 6th day of
November 1996. Marge (Schmuckal)
Zoning Administrator
STRIE OF MAINE
Cumberland, ss. November 6 , 19 96
Then personally appeared the above-named Marge Schmuckal and
Then personally appeared the above-named Marge Schmuckal and acknowledged the above certificate to be NXXX her free act and deed in
his/her capacity as Zoning Administrator for the City of Portland.
nisty near trapetory and soming manifestation for the original of the original origi
Nebral Johns
DEBORAH JOHNSON
Printed or Wolary Bubig Maine My Commission Expires May 26, 2002 Notary Public

THIS CERTIFICATE MUST BE RECORDED BY THE PROPERT! OWNER IN THE CUMBERLAND COUNTY REGISTRY OF DEEDS FOR THE SETBACK REDUCTION TO BE VALID.



CITY OF PORTLAND, MAINE

SETBACK REDUCTION APPLICATION FOR EXISTING STRUCTURES

Applicant's name and address: Fefe	r A. Fitzpatrick	
19 Jeanne Court, Portland, Maine		. 4
Applicant's interest in property (e.		
	and the state of t	•
Owner's name and address (if differe	ant):	
Address of property and Assessor's c	chart, block, and lot number:	
Zone: R- 3	C2 USA	•
P. Andrew Control of the Control of	Present Use: Residential	
Setback Reduction from Section 14-1	90 -(h)C Future Use: Residential	
Please attack First Plan as outlined \$50.00.	in Section 14-437. The required fee	≥ 1s
The undersigned hereby makes applica described, and certifies that all in true and correct to the best of his/	Privile in the control of the contro	7e : is
	QHA Thys 11/1/96	
Dated: November 1 1996	Peter A. Fitzpatrick	
	Signature of Applicant	

THIS IS NOT A BOUNDARY SURVEY

INSPECTION OF PREMISES

THEREBY CERTIFY TO Bouglas Mile Co.,

Peoples Reritage Savings Bank and its Title Insurers

The monumentation is all in narmony with current deed description.

The building seibacks are not in conformity with town zoning requirements. * O TEQUES A The dwelling does not seemed fall within the special flood hazard zone as definedted by the Federal Emergency Management Agency.

The land does not seemed fall within the special flood hazard zone as indicated on community-panel # 2 300 / 0017 6.

19 Jeanne Court Portland Maine

Job Number: __

284-17


Inspection Date: 10-15-96

Scale: 1 ==

Buyer: Felixberto Lagaspi &

Rolando Lagaspi

Seller: Peter A. Fitzpatrick

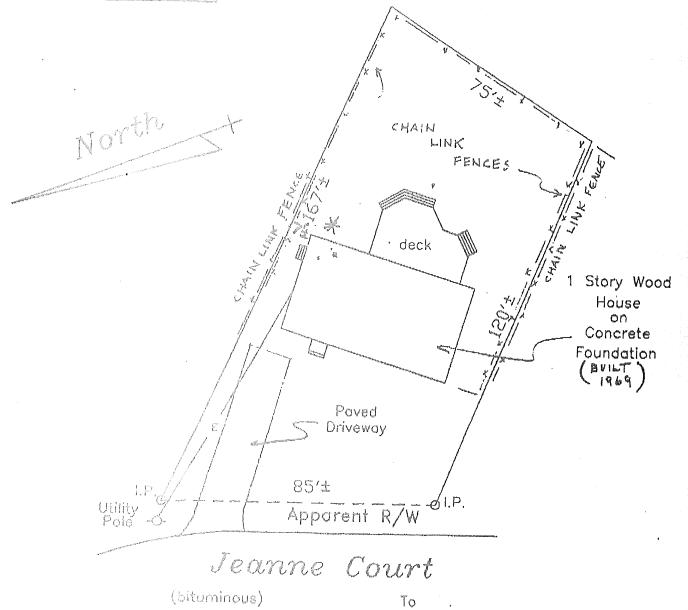

THIS PROPERTY IS SUBJECT TO ALL GHTS AND EASEMENTS OF RECORD. HOSE THAT ARE EVIDENT ARE SHOWN THIS PLAN MIGHT NOT REVEAL DNFLICTS WITH ABUTTING DEEDS

BRUCE A. BOWMAN, INC. P.O. Box 12 A

PLAN BOOK 49 PAGE

LOT