



- 1. MAINTAIN ENTRANCE IN A CONDITION THAT WILL PREVENT TRACKING OF SEDIMENT ONTO PUBLIC RIGHT-OF-WAY. IF WASHING IS REQUIRED PREVENT SEDIMENT FROM ENTERING WATERWAYS, DITCHES OR STORM DRAINS.
- 2. REMOVE STABILIZED CONSTRUCTION ENTRANCE TO FINISH ROAD CONSTRUCTION & PAVEMENT.

## STABILIZED CONSTRUCTION ENTRANCE DETAIL NOT TO SCALE

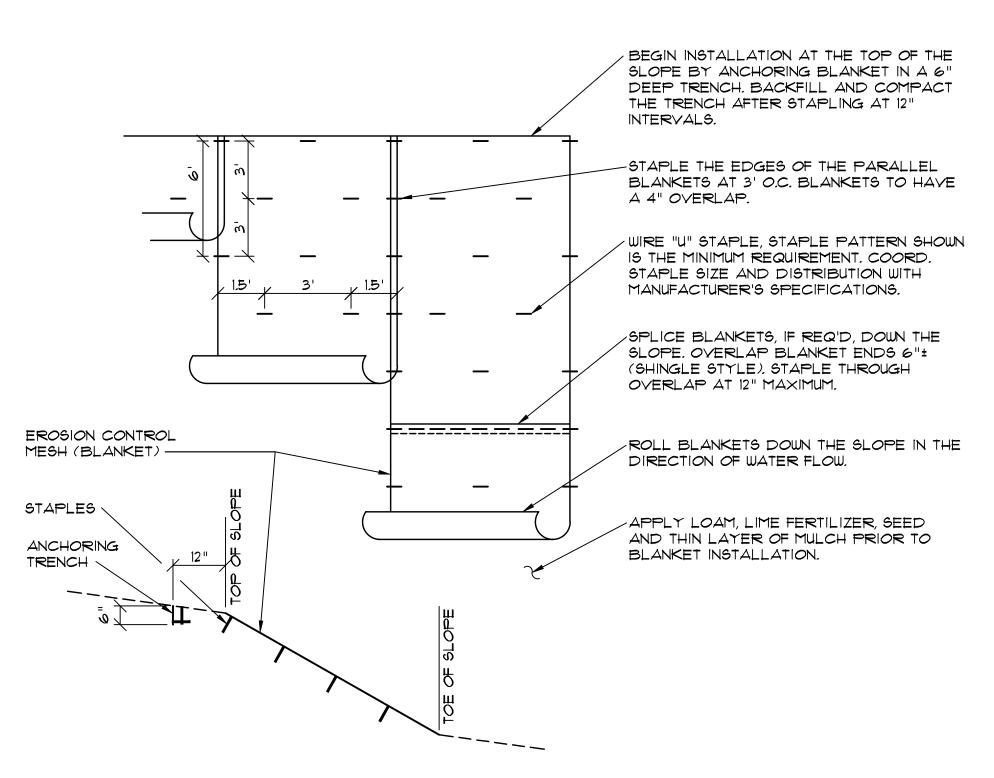


EROSION CONTROL MESH INSTALLATION DETAIL

NOT TO SCALE

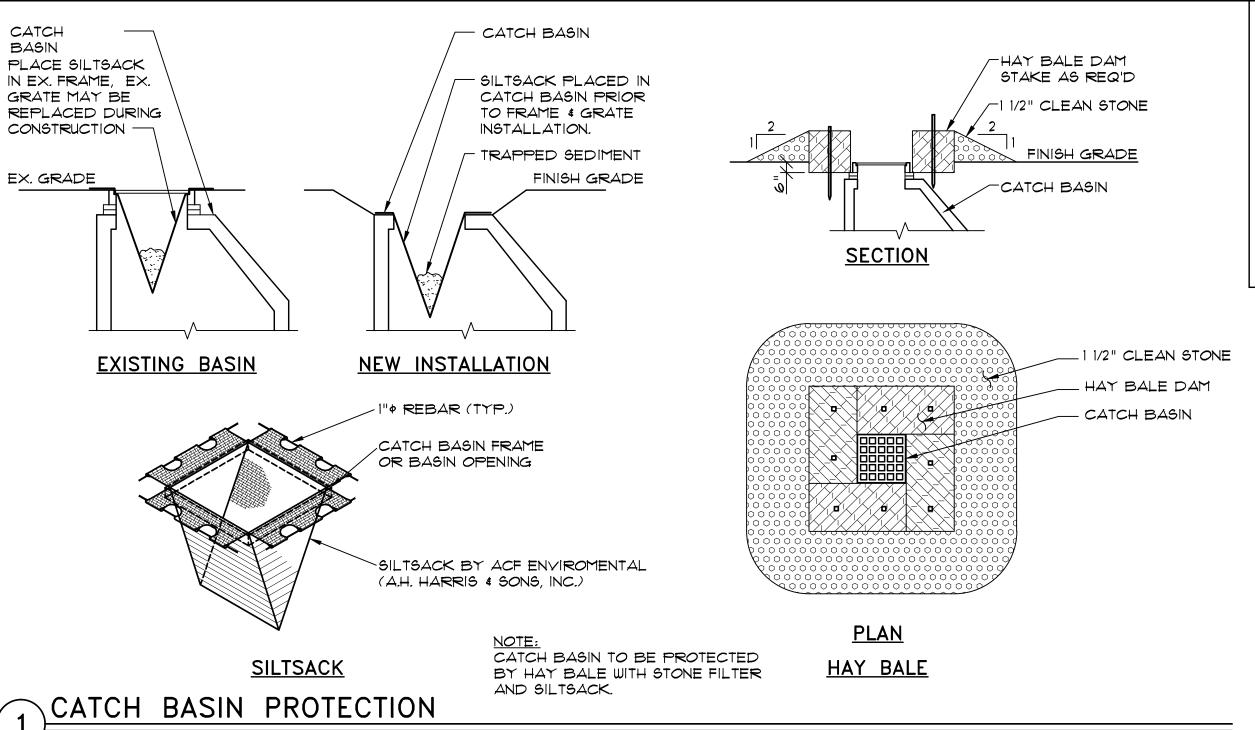

NOT TO SCALE

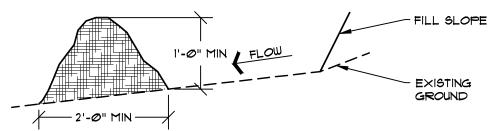

NOTES: 1. EROSION CONTROL MIX CAN BE MANUFACTURED ON OR OFF THE SITE. IT MUST CONSIST PRIMARILY OF ORGANIC MATERIAL SEPARATED AT THE POINT OF GENERATION, AND MAY INCLUDE: SHREDDED BARK, STUMP GRINDINGS, COMPOSTED BARK, OR FLUME GRIT AND FRAGMENTED WOOD GENERATED FROM WATER-FLUME LOG HANDLING SYSTEMS.

WOOD CHIPS, GROUND CONSTRUCTION DEBRIS, REPROCESSED WOOD PRODUCTS OR BARK CHIPS WILL NOT BE ACCEPTABLE AS THE ORGANIC COMPONENT OF THE MIX. EROSION CONTROL MIX SHALL CONTAIN A WELL-GRADED MIXTURE OF PARTICLE SIZES AND MAY CONTAIN ROCKS LESS THAN 4" IN DIAMETER. EROSION CONTROL MIX MUST BE FREE OF REFUSE, PHYSICAL CONTAMINANTS, AND MATERIAL TOXIC TO PLANT

GROWTH. THE MIX COMPOSITION SHALL MEET THE FOLLOWING STANDARDS:

E. SOLUBLE SALTS CONTENT SHALL BE LESS THAN 4.0 MMHOS/CM.

A. ORGANIC MATERIAL: BETWEEN 20% - 100% (DRY WEIGHT BASIS) B. PARTICLE SIZE: BY WEIGHT, 100% PASSING 6" SCREEN, 10-85% PASSING 0.75" SCREEN C. THE ORGANIC PORTION NEEDS TO BE FIBROUS AND ELONGATED. D. LARGE PORTIONS OF SILTS, CLAYS OR FINE SANDS ARE NOT ACCEPTABLE IN THE MIX.

2. ON SLOPES LESS THAN 5% OR AT THE BOTTOM OF SLOPES 2:1 OR LESS UP TO 20 FEET LONG, THE BARRIER MUST ACCOMMODATE THE ADDITIONAL FLOW.

3. THE BARRIER MUST BE PLACED ALONG A RELATIVELY LEVEL ELEVATION, IT MAY BE NECESSARY TO CUT TALL GRASSES OR WOODY VEGETATION TO AVOID CREATING VOIDS AND BRIDGES THAT WOULD ENABLE FINES TO WASH UNDER THE BARRIER THROUGH THE GRASS BLADES OR PLANT STEMS.

4. LOCATIONS WHERE OTHER BMP'S SHOULD BE USED: A. AT LOW POINTS OF CONCENTRATED FLOW

F. PH: 5.0 - 8.0

B. BELOW CULVERT OUTLET APRONS C. WHERE A PREVIOUS STAND-ALONE EROSION CONTROL MIX APPLICATION HAS FAILED D. AT THE BOTTOM OF STEEP PERIMETER SLOPES THAT ARE MORE THAN 50 FEET FROM TOP TO BOTTOM (LARGE UPGRADIENT WATERSHED) E. AROUND CATCH BASINS AND CLOSED STORM DRAIN SYSTEMS.

5. THE EROSION CONTROL MIX BARRIERS SHOULD BE INSPECTED REGULARLY AND AFTER EACH LARGE RAINFALL. REPAIR ALL DAMAGED SECTIONS OF BERM IMMEDIATELY BY REPLACING OR ADDING ADDITIONAL MATERIAL PLACED ON THE BERM TO THE DESIRED HEIGHT AND WIDTH.


6. IT MAY BE NECESSARY TO REINFORCE THE BARRIER WITH SILT FENCE OR STONE CHECK DAMS IF THERE ARE SIGNS OF UNDERCUTTING OR THE IMPOUNDMENT OF LARGE VOLUMES OF WATER.


7. SEDIMENT DEPOSITS SHOULD BE REMOVED WHEN THEY REACH APPROXIMATELY ONE-HALF THE HEIGHT OF THE

8. REPLACE SECTIONS OF BERM THAT DECOMPOSE, BECOME CLOGGED WITH SEDIMENT OR OTHERWISE BECOME INEFFECTIVE. THE BARRIER SHOULD BE RESHAPED AS NEEDED.

9. EROSION CONTROL MIX BARRIERS CAN BE LEFT IN PLACE AFTER CONSTRUCTION. ANY SEDIMENT DEPOSITS REMAINING IN PLACE AFTER BARRIER IS NO LONGER REQUIRED SHOULD BE SPREAD TO CONFORM TO THE EXISTING GRADE AND BE SEEDED AND MULCHED. WOODY VEGETATION CAN BE PLANTED INTO THE BARRIERS, OR THEY CAN BE OVER-SEEDED WITH LEGUMES. IF THE BARRIER NEEDS TO BE REMOVED, IT CAN BE SPREAD OUT INTO THE LANDSCAPE.

EROSION CONTROL MIX SEDIMENT BARRIER SURFACE DRAINAGE SEDIMENT CONTROL

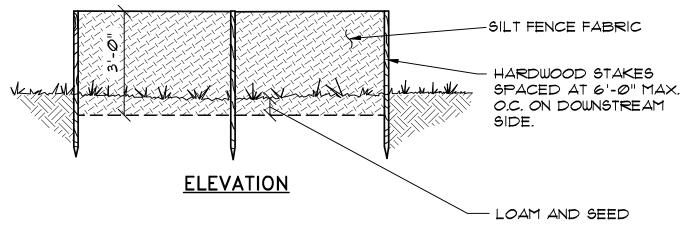

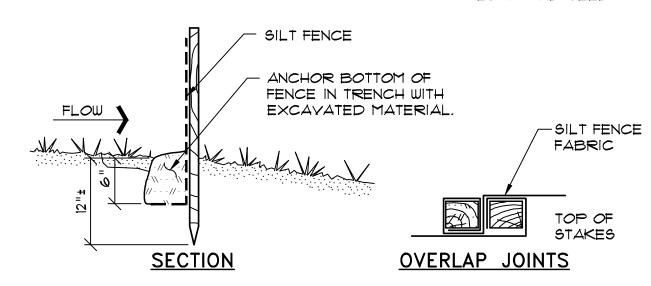

SILT FENCE

CONTRACTORS OPTION TO USE SEDIMENT BARRIER OR SILT FENCE FOR SLOPE PROTECTION.

NOT TO SCALE

ORTHLAND ENTER SOUTH STREET ORTLAND, MAINE (

1945 CONGRESS STREE ELKS LODGE, PORTLAND, MAINE

MAP/LOT 216-A-6 & 217-A-1