

# Advantage® Oil Fired Water Boiler

## ADVANTAGE® CAST IRON BOILERS


### Features

- A rugged wet-base heat exchanger design
- Three physical sizes with seven firing rates
- Cast-iron burner swing-open door for easy access
- Available with and without tankless coil
- 3-prong quick disconnect for easy service
- Attractive split jacket easily removed for servicing
- Taco 00R 3-speed circulator
- Barometric damper
- ASME safety relief valve
- Fuel Smart Hydrostat® operating controls
  - Temperature Limit Control: Designed for cold start and tankless coil boilers
  - Low Water Cut-Off: Provides protection against potentially dangerous low water conditions
  - Boiler Reset Control: Utilizes Thermal Targeting™ technology to conserve fuel by monitoring heating demand and establishing target boiler temperatures below the high limit setting
- Limited lifetime warranty

The PurePro® Advantage™ Boiler is a residential, cast-iron, oil-fired water boiler designed for installation with a standard chimney. It is available in heating capacities from 80,000 to 241,000 BTU/hr. Energy Star® rated for most firing rates.

The PurePro Advantage sets the standard for installer-ready oil fired boilers. The Advantage is available with a Beckett AFG Burner, and comes standard with a Taco 0015 3-speed Circulator and Hydrolevel 3250 HydroStat which combines Temperature Limit Control, LWCO and Boiler Reset in one easy to use control.

The Advantage is available with an optional front mounted tankless coil for Domestic Hot Water needs.

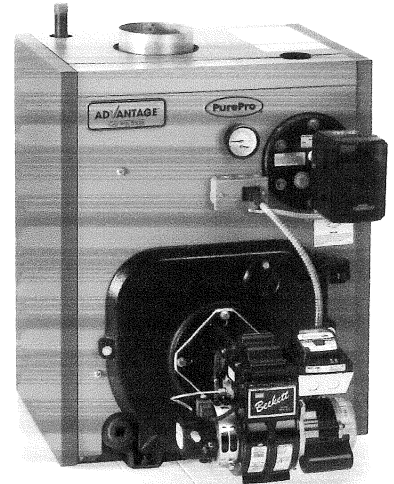

Constructed and tested in accordance with ASME Boiler Code, Section IV.

A limited lifetime warranty is provided for the cast iron heat exchanger.

## Abundant, Rapid Hot Water Heating

PurePro® offers a complete line of indirect water heaters to complement the Advantage™ boiler. By utilizing the Advantage boiler as its heat supply, the burner fires only when necessary and transfers heat from the Advantage boiler to the water heater through a highly efficient heat exchanger.



Constructed and tested in accordance with ASME Boiler Code, Section IV.