

City of Portland, Maine – Building or Use Permit Application 389 Congress Street, 04101, Tel: (207) 874-8703, FAX: 874-8716

Location of Construction: 57 Belfort Street		Owner: Straight Mellissa		Phone: 878-5276		Permit No: 000634	
Owner Address: ***Russell Quinn ***		Lessee/Buyer's Name: ****		Phone: 893-9061**		BusinessName:	
Contractor Name: Russell Quinn		Address:		Phone:		Permit Issued: 2000 JUN 6 10 14 AM CITY OF PORTLAND	
Past Use: RENDER xxxxxxx single family		Proposed Use: same		COST OF WORK: \$18,000		PERMIT FEE: \$132.00	
				FIRE DEPT. <input type="checkbox"/> Approved <input type="checkbox"/> Denied		INSPECTION: Use Group 1.3 Type 5/2 1900899 Signature: <i>[Signature]</i>	
Proposed Project Description: Renovations New second floor over back 1/3 of house				Signature:		Zone: GBL 299-D-021	
				PEDESTRIAN ACTIVITIES DISTRICT (P.A.D.)		Zoning Approval: <i>ok with conditions</i>	
				Action: <input type="checkbox"/> Approved <input type="checkbox"/> Approved with Conditions <input type="checkbox"/> Denied		Special Zone or Reviews: <input type="checkbox"/> Shoreland <input type="checkbox"/> Wetland <input type="checkbox"/> Flood Zone <input type="checkbox"/> Subdivision <input type="checkbox"/> Site Plan maj <input type="checkbox"/> minor <input type="checkbox"/> mm <input type="checkbox"/>	
Permit Taken By: K		Date Applied For: June 6 2000 K		Signature:		Date:	

1. This permit application does not preclude the Applicant(s) from meeting applicable State and Federal rules.
2. Building permits do not include plumbing, septic or electrical work.
3. Building permits are void if work is not started within six (6) months of the date of issuance. False information may invalidate a building permit and stop all work..

PERMIT ISSUED WITH REQUIREMENTS

CERTIFICATION

I hereby certify that I am the owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his authorized agent and I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in the application is issued, I certify that the code official's authorized representative shall have the authority to enter all areas covered by such permit at any reasonable hour to enforce the provisions of the code(s) applicable to such permit

June 6 2000

SIGNATURE OF APPLICANT ADDRESS: DATE: PHONE:

RESPONSIBLE PERSON IN CHARGE OF WORK, TITLE PHONE:

White-Permit Desk Green-Assessor's Canary-D.P.W. Pink-Public File Ivory Card-Inspector

Zoning Appeal

Variance
 Miscellaneous
 Conditional Use
 Interpretation
 Approved
 Denied

Historic Preservation

Not in District or Landmark
 Does Not Require Review
 Requires Review

Action:

Approved
 Approved with Conditions
 Denied

Date: *[Signature]*

CEO DISTRICT 1

COMMENTS

7-14-00 Close-in inspection w/ sw - ceiling height too low 8' 1/2". Need headers over door openings, and spec design on roof truss system. Egress windows ok JB

8-1-00 Framing inspection - ceiling height good - headers at doors, Truss design pictures submitted. Need to check 2x8 load capacity. JB

9-25-00 Bathroom Rough OK JB

Pictures submitted for Rafter support - bearing wall located 14' in from low side of pitch - strong arm uprights 2x6 from rafter to wall ~~to~~ blocked and gussets to support. JB

Inspection Record

Type

Foundation: _____
Framing: _____
Plumbing: _____
Final: _____
Other: _____

Date

Inspection Services
Michael J. Nugent
Manager



Department of Urban Development
Joseph E. Gray, Jr.
Director

CITY OF PORTLAND

congratulations !!!!!

**Building or Use Permit Application
Additions/Alterations/Accessory Structures
To Detached Single Family Dwelling**

As an applicant for a building permit, you are about to enter into a relationship with our Office. We welcome any questions, comments or suggestions that will make the process more efficient. Attached you will find an application and some samples of the submissions you will provide at application time. Please read ***ALL*** of the information and if you need any further assistance please call 874-8703 or 874-8693.

BUILDING PERMIT REPORT

DATE: 7 June 2000 ADDRESS: 57 Belfort St. CBL: 299-D-021

REASON FOR PERMIT: To make interior renovations.

BUILDING OWNER: Melissa Straight.

PERMIT APPLICANT: _____ / CONTRACTOR Russell Quinn

USE GROUP: R-3 CONSTRUCTION TYPE: 53 CONSTRUCTION COST: 18000.44 PERMIT FEES: \$13200

The City's Adopted Building Code (The BOCA National Building code/1999 with City Amendments)
The City's Adopted Mechanical Code (The BOCA National Mechanical Code/1993)

CONDITION(S) OF APPROVAL

This permit is being issued with the understanding that the following conditions are met: *1, *9, *11, *13, *15, *19, *22, *29, *32, *34, *35, *37, *31

- *1. This permit does not excuse the applicant from meeting applicable State and Federal rules and laws.
- 2. Before concrete for foundation is placed, approvals from the Development Review Coordinator and Inspection Services must be obtained. (A 24 hour notice is required prior to inspection) "ALL LOT LINES SHALL BE CLEARLY MARKED BEFORE CALLING."
- 3. Foundation drain shall be placed around the perimeter of a foundation that consists of gravel or crushed stone containing not more than 10 percent material that passes through a No. 4 sieve. The drain shall extend a minimum of 12 inches beyond the outside edge of the footing. The thickness shall be such that the bottom of the drain is not higher than the bottom of the base under the floor, and that the top of the drain is not less than 6 inches above the top of the footing. The top of the drain shall be covered with an approved filter membrane material. Where a drain tile or perforated pipe is used, the invert of the pipe or tile shall not be higher than the floor elevation. The top of joints or top of perforations shall be protected with an approved filter membrane material. The pipe or tile shall be placed on not less than 2" of gravel or crushed stone, and shall be covered with not less than 6" of the same material. Section 1813.5.2
- 4. Foundations anchors shall be a minimum of 1/2" in diameter, 7" into the foundation wall, minimum of 12" from corners of foundation and a maximum 6' O.C. between bolts. Section 2305.17
- 5. Waterproofing and dampproofing shall be done in accordance with Section 1813.0 of the building code.
- 6. Precaution must be taken to protect concrete from freezing. Section 1908.0
- 7. It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify that the proper setbacks are maintained.
- Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of 1/2 inch gypsum board or the equivalent applied to the garage side. (Chapter 4, Section 407.0 of the BOCA/1999)
- *9. All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National Mechanical Code/1993). Chapter 12 & NFPA 211
- *11. Guardrails & Handrails: A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42". In occupancies in Use Group A,B,H-4, I-1, I-2, M and R and public garages and open parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would provide a ladder effect. (Handrails shall be a minimum of 34" but not more than 38". Exception: Handrails that form part of a guard shall have a height not less than 36" and not more than 42". Handrail grip size shall have a circular cross section with an outside diameter of at least 1 1/4" and not greater than 2". (Sections 1021 & 1022.0). Handrails shall be on both sides of stairway. (Section 1014.7)
- 12. Headroom in habitable space is a minimum of 7'6". (Section 1204.0)
- *13. Stair construction in Use Group R-3 & R-4 is a minimum of 10" tread and 7 3/4" maximum rise. All other Use Group minimum 11" tread, 7" maximum rise. (Section 1014.0)
- *14. The minimum headroom in all parts of a stairway shall not be less than 80 inches. (6'8") 1014.4
- *15. Every sleeping room below the fourth story in buildings of Use Groups R and I-1 shall have at least one operable window or exterior door approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate tools. Where windows are provided as means of egress or rescue they shall have a sill height not more than 44 inches (1118mm) above the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches (610mm). The minimum net clear opening width dimension shall be 20 inches (508mm), and a minimum net clear opening of 5.7 sq. ft. (Section 1010.4)
- 16. Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it exits directly from the apartment to the building exterior with no communications to other apartment units. (Section 1010.1)
- 17. All vertical openings shall be enclosed with construction having a fire rating of at least one (1) hour, including fire doors with self closer's. (Over 3 stories in height requirements for fire rating is two (2) hours. (Section 710.0)
- 18. The boiler shall be protected by enclosing with (1) hour fire rated construction including fire doors and ceiling, or by providing automatic extinguishment. (Table 302.1.1)

- *19. All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City's Building Code Chapter 9, Section 920.3.2 (BOCA National Building Code/1999), and NFPA 101 Chapter 18 & 19. (Smoke detectors shall be installed and maintained at the following locations):
 - In the immediate vicinity of bedrooms
 - In all bedrooms
 - In each story within a dwelling unit, including basements
- 20. A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved type. (Section 921.0)
- 21. The Fire Alarm System shall be installed and maintained to NFPA #72 Standard.
- 22. The Sprinkler System shall be installed and maintained to NFPA #13 Standard.
- 23. All exit signs, lights and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023.0 & 1024.0 of the City's Building Code. (The BOCA National Building Code/1999)
- 24. Section 25 - 135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year".
- 25. The builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a certification from a design professional that the plans commencing construction of the facility, the builder shall submit the certification the Division of Inspection Services:
- 26. Ventilation and access shall meet the requirements of Chapter 12 Sections 1210.0 and 1211.0 of the City's Building Code. (Crawl spaces & attics).
- *27. All electrical, plumbing and HVAC permits must be obtained by a Master Licensed holders of their trade. No closing in of walls until all electrical (min. 72 hours notice) and plumbing inspections have been done.
- 28. All requirements must be met before a final Certificate of Occupancy is issued.
- *29. All building elements shall meet the fastening schedule as per Table 2305.2 of the City's Building Code (The BOCA National Building Code/1996).
- 30. Ventilation of spaces within a building shall be done in accordance with the City's Mechanical code (The BOCA National Mechanical Code/1993). (Chapter M-16)
- 31. Please read and implement the attached Land Use Zoning report requirements. *See Attached*
- *32. Boring, cutting and notching shall be done in accordance with Sections 2305.3, 2305.3.1, 2305.4.4 and 2305.5.1 of the City's Building Code.
- 33. Bridging shall comply with Section 2305.16.
- *34. Glass and glazing shall meet the requirements of Chapter 24 of the building code. (Safety Glazing Section 2406.0)
- 35. All signage, shall be done in accordance with Section 3102.0 signs of the City's Building Code, (The BOCA National Building Code/1999).
- *36. ~~Rafter Truss design shall be submitted for approval before work begin - The design shall be done by a structural engineer -~~
- 37. ~~This permit is being issued with the understand that A New set of plans be submitted showing Framing of Floor area and how you gain access to this area -~~

[Signature]
 P. Samuel Phillips, Building Inspector
 Cc: E. McDougall, PFD
 Marge Schmuckal, Zoning Administrator

PSH 1/26/00

****On the basis of plans submitted and conditions placed on these plans any deviations shall require a separate approval.**

****THIS PERMIT HAS BEEN ISSUED WITH THE UNDERSTANDING THAT ALL THE CONDITIONS OF THE APPROVAL SHALL BE COMPLETED. THEREFORE, BEFORE THE WORK IS COMPLETED A REVISED PLAN OR STATEMENT FROM THE PERMIT HOLDER SHALL BE SUBMITTED TO THIS OFFICE SHOWING OR EXPLAINING THAT THE CONDITIONS HAVE BEEN MET. IF THIS REQUIREMENT IS NOT RECEIVED YOUR CERTIFICATE OF OCCUPANCY SHALL BE WITHHELD.**

******CERTIFICATE OF OCCUPANCY FEE \$50.00**

****** ALL PLANS THAT REQUIRE A PROFESSIONAL DESIGNER'S SEAL,(AS PER SECTION 114.0 OF THE BUILDING CODE) SHALL ALSO BE PRESENTED TO THIS DIVISION ON AUTO CAD LT.2000, OR EQUIVALENT.**

LAND USE - ZONING REPORT

6/13/00

ADDRESS: 57 Belfort St DATE: 6/13/00

REASON FOR PERMIT: ~~interior~~ renovation - New second floor over back 1/3 of house

BUILDING OWNER: Melissa Straight C-B-L: 299-D-21

PERMIT APPLICANT: Russell Quinn

APPROVED: with conditions DENIED: _____


#1, #6, #10, #11

CONDITION(S) OF APPROVAL

1. This permit is being approved on the basis of plans submitted. Any deviations shall require a separate approval before starting that work.
 2. During its existence, all aspects of the Home Occupation criteria, Section 14-410, shall be maintained.
 3. The footprint of the existing _____ shall not be increased during maintenance reconstruction.
 4. All the conditions placed on the original, previously approved, permit issued on _____ are still in effect for this amendment.
 5. Your present structure is legally nonconforming as to rear and side setbacks. If you were to demolish the building on your own volition, you will not be able to maintain these same setbacks. Instead you would need to meet the zoning setbacks set forth in today's ordinances. In order to preserve these legally non-conforming setbacks, you may only rebuild the _____ in place and in phases.
 6. This property shall remain a single family dwelling. Any change of use shall require a separate permit application for review and approval.
 7. Our records indicate that this property has a legal use of _____ units. Any change in this approved use shall require a separate permit application for review and approval.
 8. Separate permits shall be required for any signage.
 9. Separate permits shall be required for future decks, sheds, pool(s), and/or garage.
 10. This is not an approval for an additional dwelling unit. You shall not add any additional kitchen equipment, such as stoves, microwaves, refrigerators, or kitchen sinks, etc. without special approvals.
- Other requirements of condition ~~It is understood that this is not~~

~~any new Additions on the structure to the~~
~~existing structure.~~
) It is now understood that this is a second floor addition over the back 1/3 of the existing house. It shall not exceed the existing footprint.
 Marge Schmuckal, Zoning Administrator


Marge Schmuckal

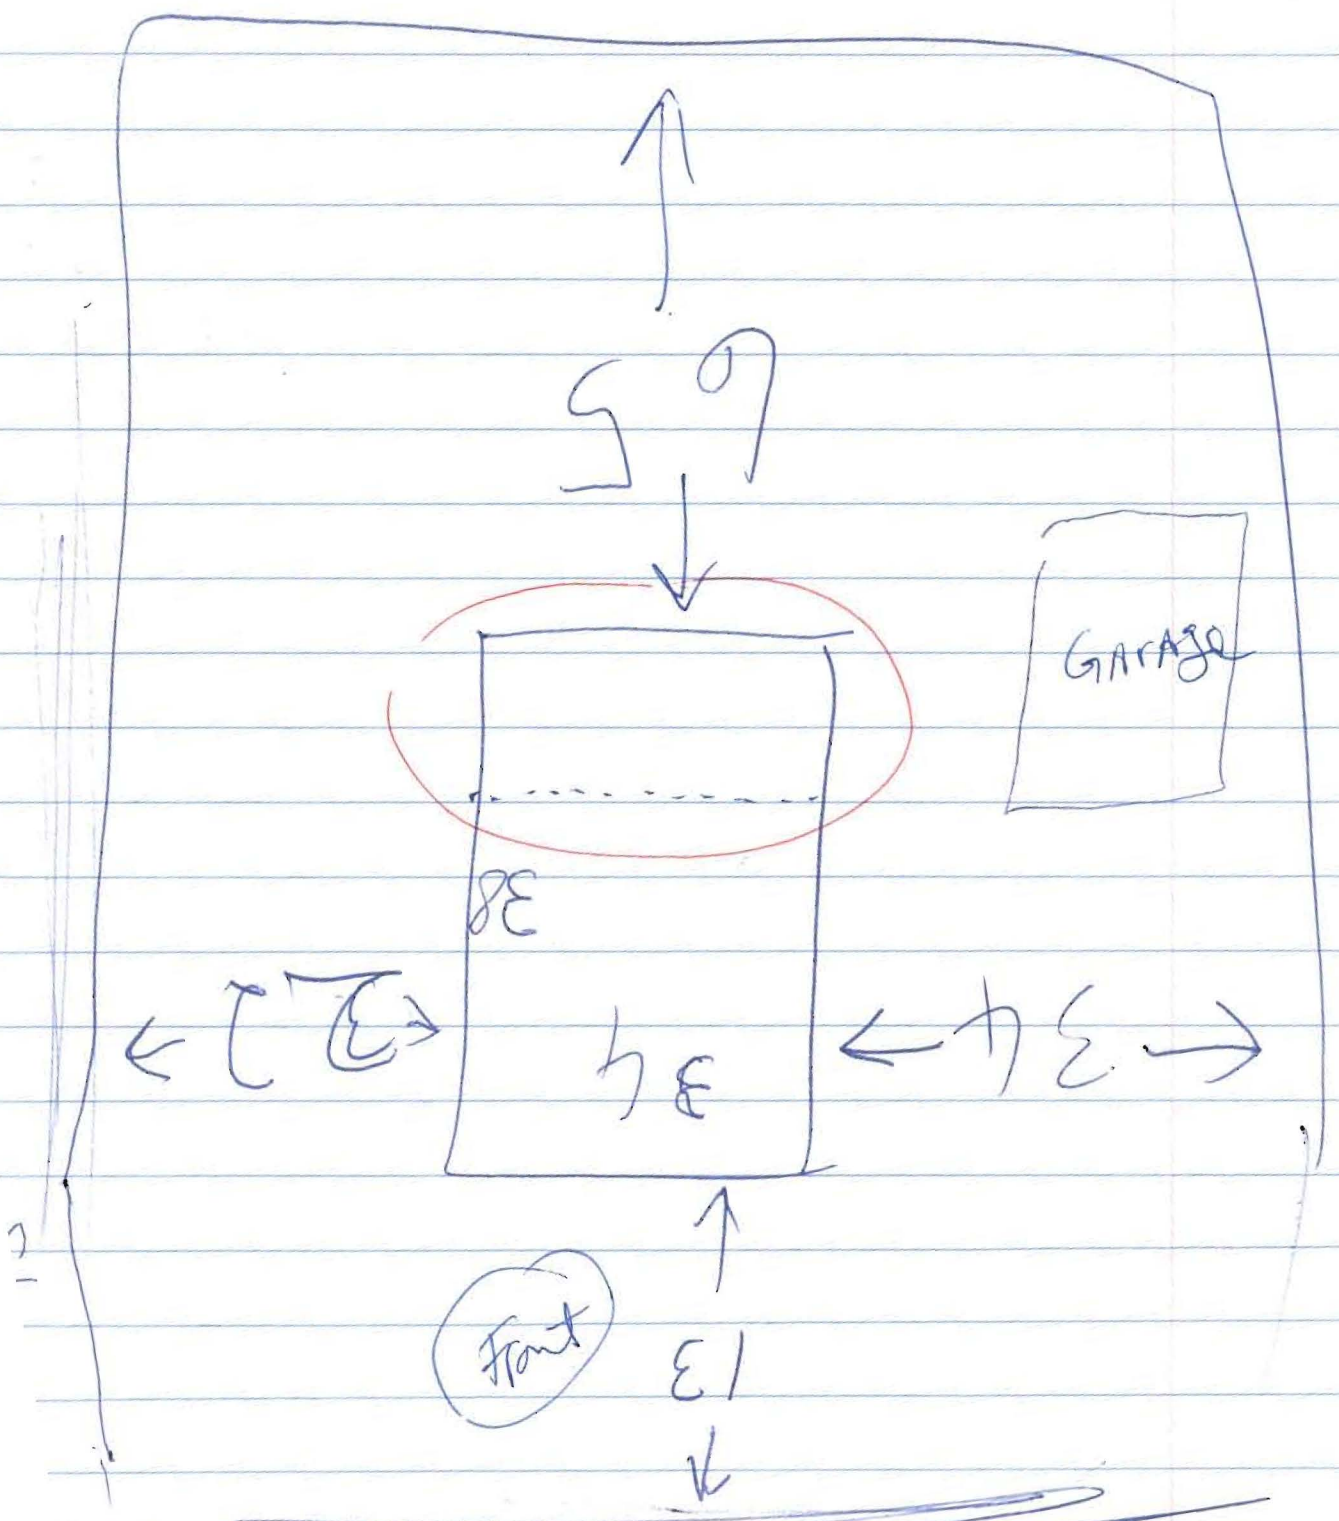

Belfort St.

on existing
stacks of

received
6/13/00

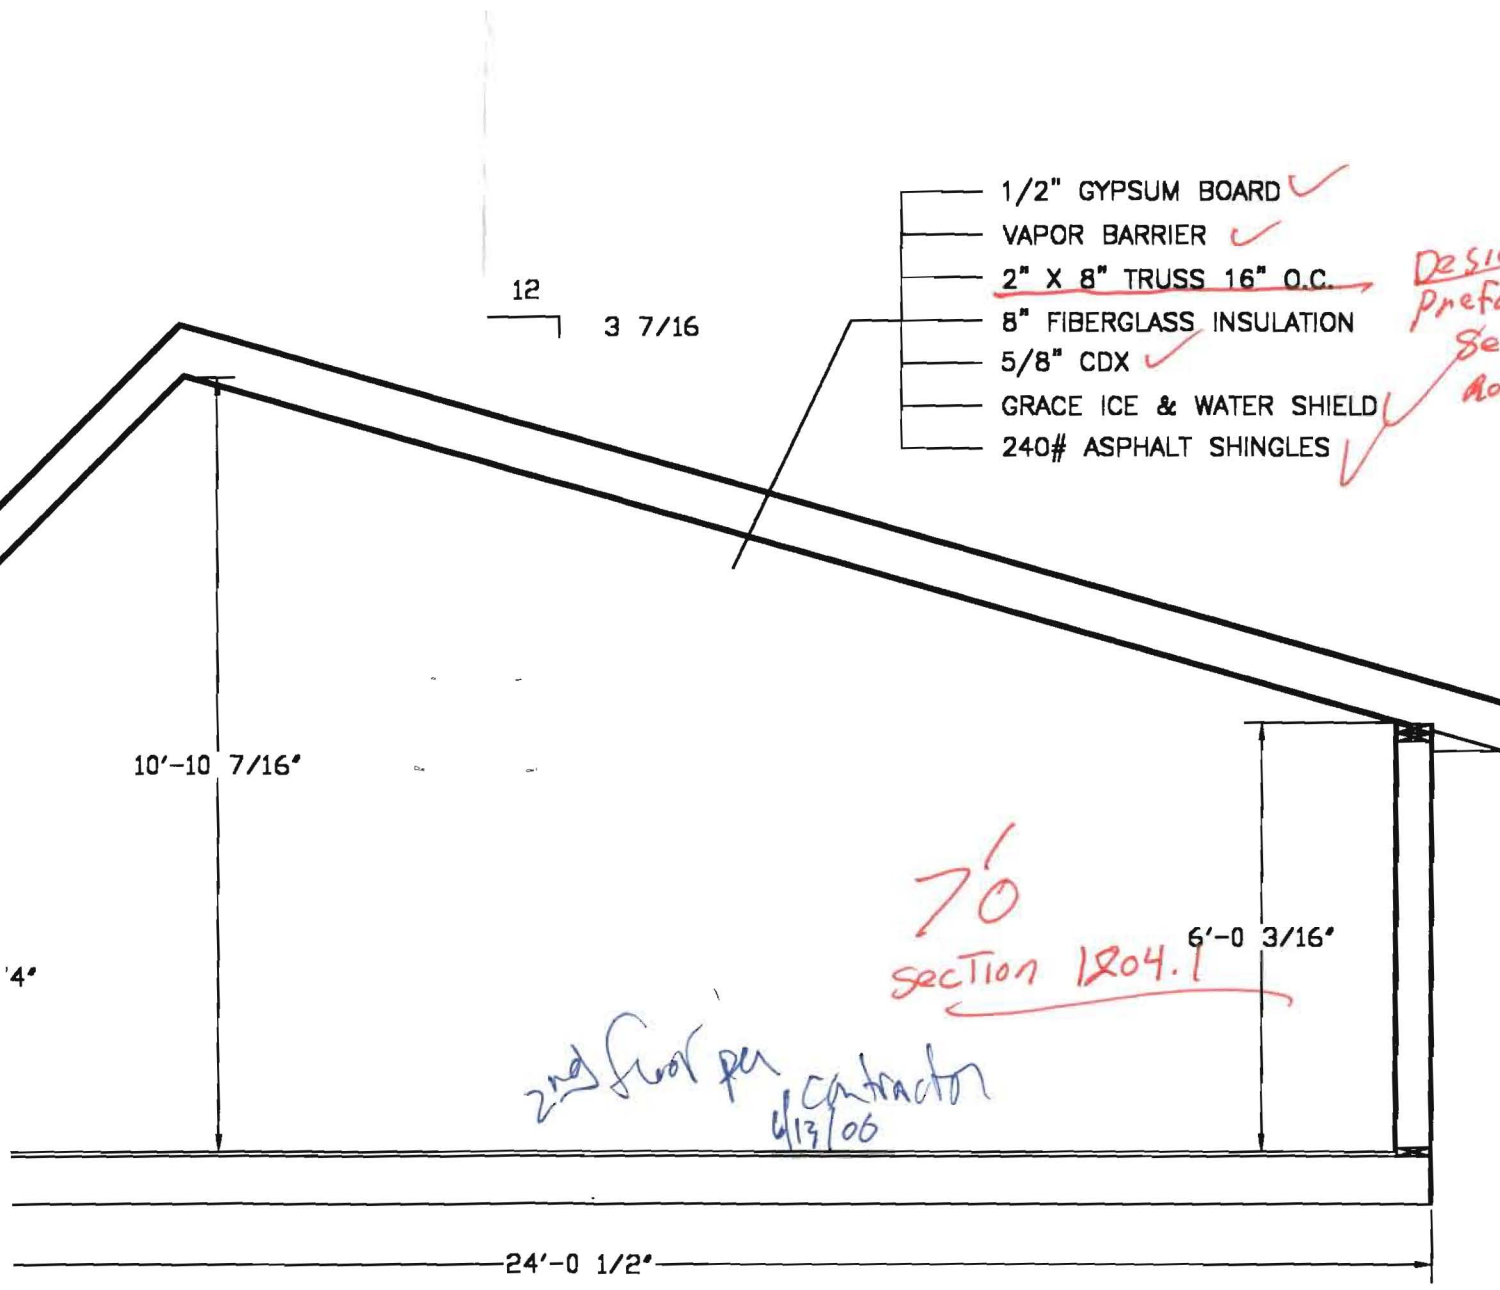

- 1/2" GYPSUM BOARD ✓
- VAPOR BARRIER ✓
- 2" X 8" TRUSS 16" O.C. →
- 8" FIBERGLASS INSULATION
- 5/8" CDX ✓
- GRACE ICE & WATER SHIELD ✓
- 240# ASPHALT SHINGLES ✓

*Design of Truss.
 Prefabricated Components
 Section 2313.0
 Roof Trusses 2313.3*

*70
 section 1204.1*

*2nd floor per contractor
 4/13/06*


NOTE:
 THIS DRAWING IS INTENDED FOR CONSTRUCTION ONLY. DIMENSIONS SHOWN MUST BE VERIFIED IN THE FIELD. HOMES ASSUMES NO LIABILITY FOR THE SOUNDNESS OF THE DESIGN. DRAWINGS ARE INTENDED TO BUILDING PRACTICE AND TO NATIONAL AND LOCAL

BUILDER:

DRAWING TITLE:
 DRAWINGS PREPARED BY:
ELEGANT HOMES
 885 Portland Road—Seco, ME 04072
 (207)282-1800

PROPOSED RESIDENCE FOR:

SCALE:
 DRAWN BY: K. PELLETIER
 CHECKED BY:
 REVISIONS:
 1.
 2.

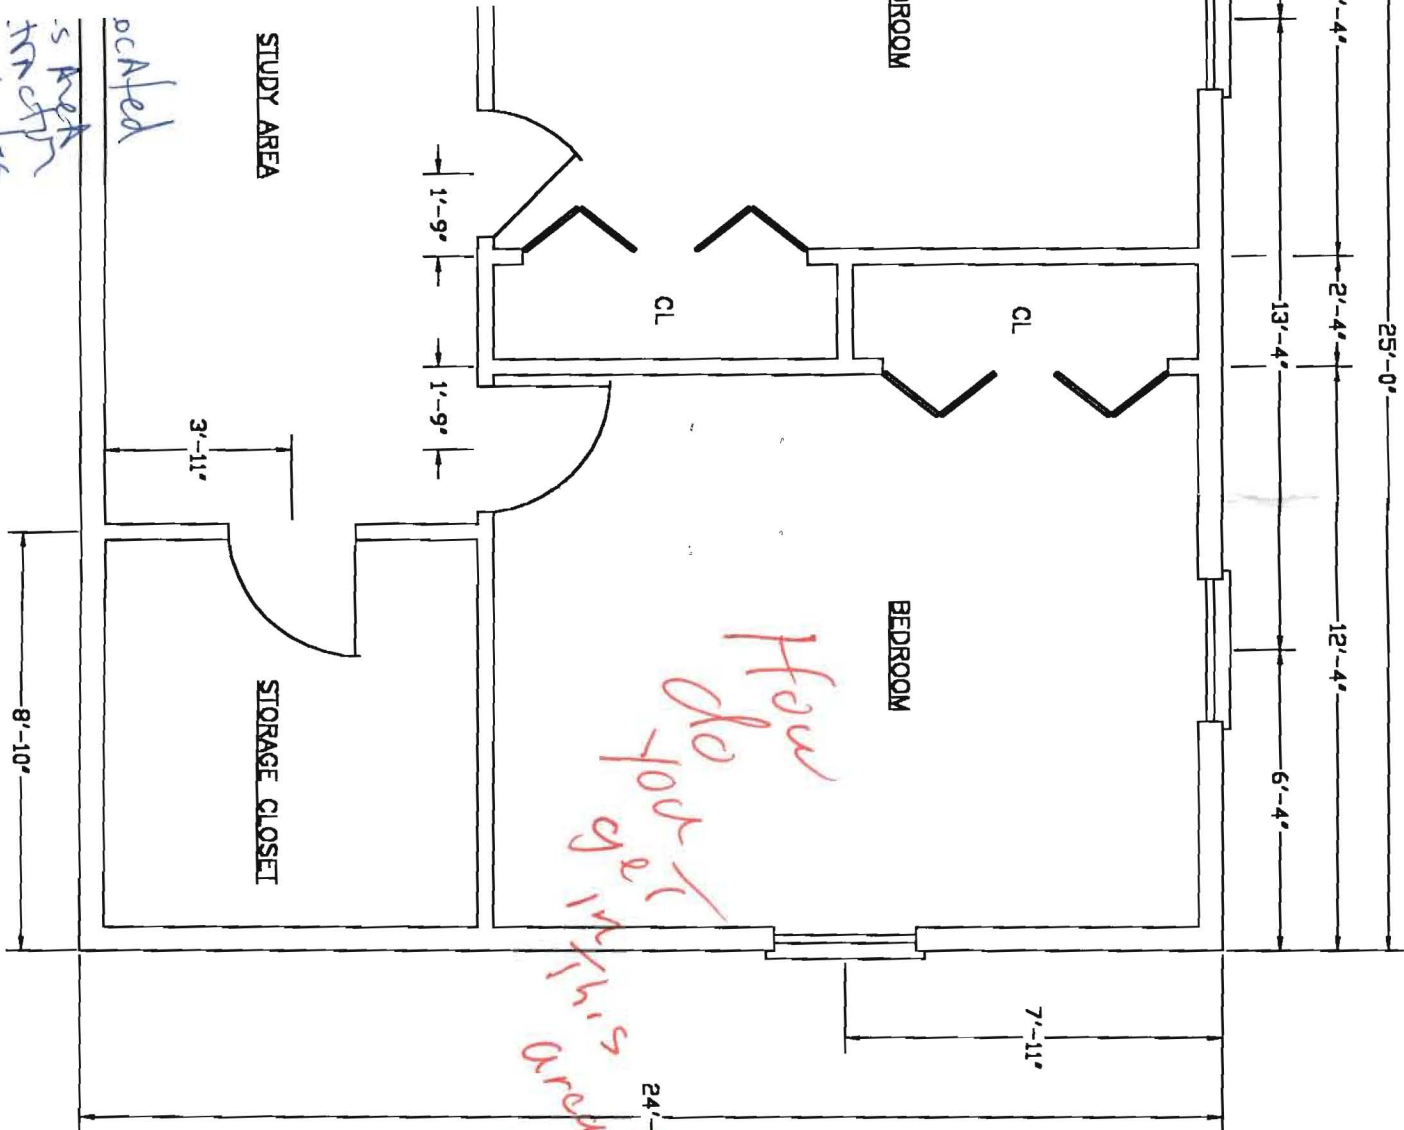

SCALE:
 DRAWN BY: K. PELLETIER
 CHECKED BY:
 REVISIONS:
 1.
 2.

PROPOSED RESIDENCE FOR:

DRAWING TITLE:
 DRAWINGS PREPARED BY:
ELEGANT HOMES
 885 Portland Road-Saco, ME 04072
 (207)282-1800

BUILDER:

NOTE:
 THIS DRAWING IS INTENDED FOR INFORMATION PURPOSE ONLY. IF USED FOR CONSTRUCTION, THE USER MUST VERIFY ALL DIMENSION AND SUGGESTIONS IN THE FIELD. ELEGANT HOMES ASSUMES NO LIABILITY FOR THE SOUNDNESS OF THE DESIGN. DRAWINGS ARE INTENDED FOR BUILDING PRACTICE AND NOT FOR NATIONAL AND LOCAL BUILDING CODES.



6/13/00

57 Bellport



6/13/00

57 Budget



6/3/00

57 Belmont St.