DOOR SCHEDULE

DOOR SCHEDULE ABBREVIATIONS

CLO.	CLOSER	HDWE	HARDWARE	S.	STEEL
D.C.	DOOR CHAIN	HM	HOLLOW METAL	S.C.	SOLID CORE WAINSCOARD
D.K.	DOOR KNOCKER	INS	INSULATED	SM.	SPRING MAKE
D.S.	DOOR SWEEP	K	KICKPLATE (FINISH SIDE)	S.L.	SPLIT JAMB (SLOOD)
E.H.D.	ELECTRIC HOLD OPENER	KL	KEY LOCK	TEMP	TEMPERED
E.S.	ELECTRIC STRIKE	MTL.	METAL	THK	THICKNESS
F.J.P.	FINGER JOINTED PRIMED	NO	NUMBER	WD	WOOD (SOLID)
FR.	FIRE RATED	P.L.	PANIC HARDWARE	W.G.	WIRE GLASS
HA	HANDICAP ACCESSIBLE	PT.	PUSH PULL	V	VARIES
HC	HOLLOW CORE WAINSCOARD	P.	PULL		
		PRIV.	PRIVACY SET		
		PA.	PASSAGE SET		

DOORS

NO.	TYPE	SIZE	THK.	F.R.	HDWE SET	MAT.	GLASS SIZE	GLASS TYPE	REMARKS	FRAME TYPES	MAT.	F.R.	DETAILS HEAD	DETAILS JAMB	THRESHOLD MAT.	THRESHOLD DETAIL SILL	THRESHOLD DETAIL HT.
EXTERIOR																-	-
01	A	3'-0"X 6'-8"	1 3/8"		KNOB	WOOD	-	-	HB, KL, TEMP, DS	SS	WOOD	-	-	C	ALUM	-	-
02	I	8'-0"X 7'-0"			TPDR	INSUL			INSUL. GL-GARAGE DOOR DO	SS	WOOD	-	-	C	ALUM	-	-
03	C	6'-0"X 6'-8"			WDDR				HB, TEMP	SS	WOOD			C	ALUM		
04	G	3'-0"X 6'-8"	1 3/8"		FULL	BRZ MTL	-	-	HB, KL, DC	AA	MTL	-	-	C	ALUM.	-	-
FIRST FLOOR																	
10	F	3'-0"X 6'-8"	1 3/4"	1 HR.	KNOB	BRZ MTL	-	-	HB, CLO, DS, KL	CC	MTL	-	-	D		-	-
11	B	2'-6"X 6'-8"	1 3/8"		KNOB	WD	-	-	P/L	SS	WD	-	-	C	WOOD	-	-
12	B	2'-8"X 6'-8"	1 3/8"		KNOB	WD	-	-	P/L	SS	WD	-	-	C	WOOD	-	-
14	B	2'-8"X 6'-8"	1 3/8"		KNOB	WD	-	-	P/L	SS	WD	-	-	C	WOOD	-	-
15	B	2'-8"X 6'-8"	1 3/4"		KNOB		-	-	BA, DB, HB	SS	WD	-	-	C	WOOD	-	-
SECOND FLOOR																	
20	B	PR 2'-8"X 6'-8"	1 3/8"		KNOB	WD			P/PR.	SS	WD			C	WOOD		
21	B	PR 2'-8"X 6'-8"	1 3/8"		KNOB	WD			P/S	SS	WD			C	WOOD		
22	B	2'-8"X 6'-8"	1 3/8"		KNOB	WD			P/S	SS	WD			C	WOOD		
23	B	2'-8"X 6'-8"	1 3/8"		KNOB	WD			P/PR	SS	WD			C	WOOD		
24	B	2'-8"X 6'-8"	1 3/8"		KNOB	WD			P/PR	SS	WD			C	WOOD		
25	B	2'-8"X 6'-8"	1 3/8"		KNOB	WD			P/PR	SS	WD			C	WOOD		
26	B	2'-8"X 6'-8"	1 3/8"		KNOB	WD			P/S	SS	WD			C	WOOD		
27	B	2'-8"X 6'-8"	1 3/8"		KNOB	WD			P/S	SS	WD			C	WOOD		
THIRD FLOOR																	
30	B	2'-8"X 6'-8"	1 3/8"		KNOB	WD			LOUVRET	SS	WD			C	WOOD		
31	B	2'-8"X 6'-8"	1 3/8"		KNOB	WD			P/S	SS	WD			C	WOOD		
32	B	PR 2'-8"X 6'-8"	1 3/8"		KNOB	WD			P/PR	SS	WD			C	WOOD		
33	B	2'-8"X 6'-8"	1 3/8"		KNOB	WD			P/S	SS	WD			C	WOOD		

NOTES:
1) - WINDOW AND DOOR QUANTITIES SHALL BE CALCULATED FROM THE FLOOR PLANS AND ELEVATIONS

WINDOW SCHEDULE

NO.	TYPE	MANUF	CAT NO.	UNIT DIMENSION	ROUGH OPENING	REMARKS	DETAILS HEAD	DETAILS JAMB
W1	C	'HANCOCK'	FT76244	N/A	2'-2" X 2'-0"	'HANCOCK LUMBER WINDOW TYPE'	-	-
W1A	E	'HANCOCK'	-	N/A	3'-3" X 3'-0"	'HANCOCK LUMBER WINDOW TYPE' AWNING	-	-
W2	A	'HANCOCK'	FDH2856*	N/A	2'-4" X 5'-4"	'HANCOCK LUMBER WINDOW TYPE'	=	=
W3	A	'HANCOCK'	FDH4068*	N/A	3'-4" X 5'-8"	'HANCOCK LUMBER WINDOW TYPE' *EGRESS WINDOW	-	-
W4	D	'HANCOCK'	FDH3653*	N/A	3'-5" X 3'-5"	'HANCOCK LUMBER WINDOW TYPE'		
W5	E	'HANCOCK'	FDH4068-2*	N/A	6'-1 1/2" X 5'-8"	'HANCOCK LUMBER WINDOW TYPE' *EGRESS WINDOW		
W6	A	'HANCOCK'	FDH3644*	N/A	3'-0" X 3'-8"	'HANCOCK LUMBER WINDOW TYPE' HEAD HGT = 7'-6" AFF		

*NOTE 1:
EACH BEDROOM OR SLEEPING AREA SHALL HAVE AN EGRESS WINDOW MIN. 20" IN WIDTH, 24" IN HEIGHT, & SILL NOT MORE THAN 44" ABOVE FINISHED FLOOR WITH A MINIMUM 5.7 SQ.FT. CLEAR OPENING. (MINIMUM ONE EACH BEDROOM)

DOOR TYPES

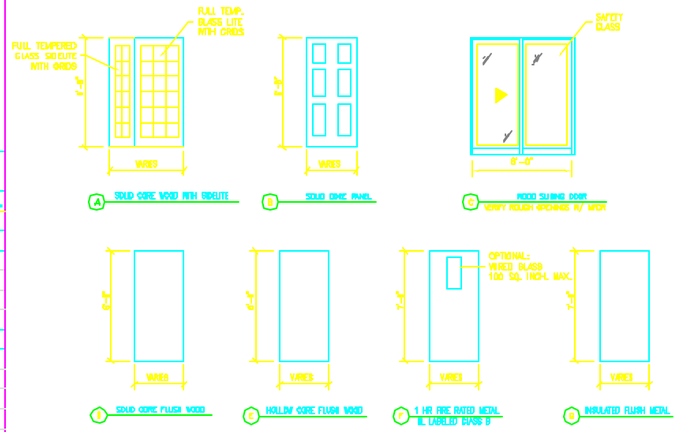

FRAME TYPES

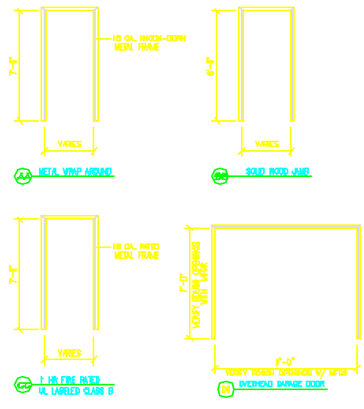

JAMB TYPES

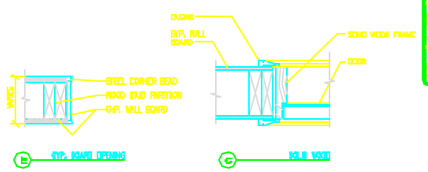





WINDOWS

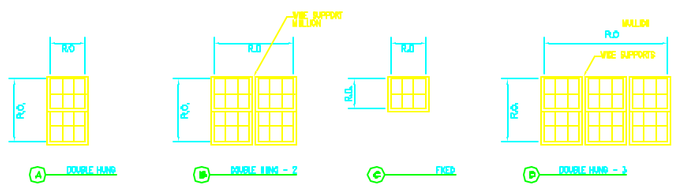



NOTES:
PROVIDE TEMPERED SAFETY GLASS IN ALL STAIR WINDOWS WITHIN 24" OF DOOR AND LESS THAN 18" ABOVE FINISHED FLOOR NEXT TO A WALKING SURFACE.



JOHN H. LEASURE ARCHITECT, INC.
60 STREET
SOUTH PORTLAND, MAINE 04106

OCEAN RIDGE CONDOMINIUMS
852 OCEAN AVENUE
PORTLAND, MAINE
DOOR AND WINDOW SCHEDULE
UNITS 44, 45 & 46

A14