


PENSOTTI

Quatech Series

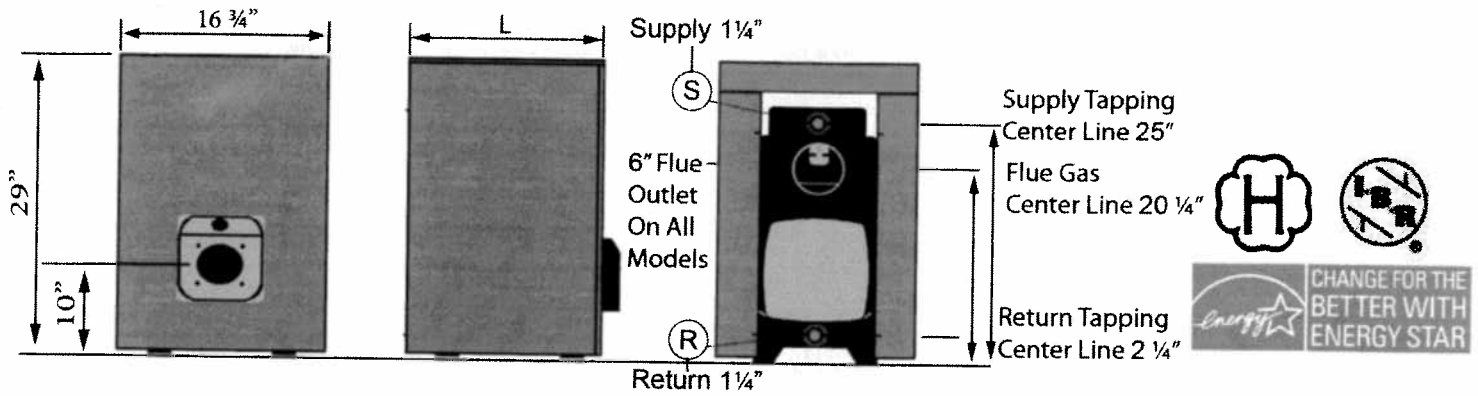

Length varies by number of sections: 3 Sections 18 1/2" 4 Sections 22 1/2" 5 Sections 26 1/4" 6 Sections 31 1/2" 7 Sections 35 1/2" 8 Sections 39 1/4"

MODEL	FUEL	IBR BURNER CAPACITY OIL INPUT		D.O.E Heating Capacity M.B.H.	IBR NET RATINGS WATER M.B.H.	RATINGS BASED ON % CO2	AFUE	MINIMUM CHIMNEY OR VENT SIZE DIAMETER BY LENGTH	WATER CONTENT U.S. GAL.	WATER RESISTANCE W.C. @ 65°	WEIGHT LBS.
		G.P.H.	M.B.H.								
DK2-3	OIL	0.70	98	83	74	13	88.2	5"X18'	5.5	1.6	370
DK2-3	GAS	N/A	85	73	63	10.1	85.0				
DK2-4	OIL	1.00	140	121	106	13	88.3	6"X18'	6.9	2.6	437
DK2-4	GAS	N/A	140	119	103	10.1	85.1				
DK2-5	OIL	1.25	175	151	131	13	88.4	6"X18'	8.2	3.4	503
DK2-5	GAS	N/A	175	149	130	10.1	85.3				
DK2-6	OIL	1.39	194	167	148	13	88.4	7"X18'	9.5	7.2	569
DK2-6	GAS	N/A	194	166	144	10.1	85.4				
DK2-7	OIL	1.60	224	195	171	13	88.5	7"X18'	10.8	8.4	639
DK2-7	GAS	N/A	224	192	167	10.1	85.5				
DK2-8	OIL	1.80	250	222	193	13	88.6	7"X18'	12.2	9.6	705
DK2-8	GAS	N/A	250	214	186	10.1	85.7				

“America’s Best Heating Value”

Pensotti LLC

34 Coffin Ave
 PO Box 3358
 Brewer, ME 04412
 Tel: (207) 942-3636
 Fax: (207) 942-3737

www.pensottiboiler.com