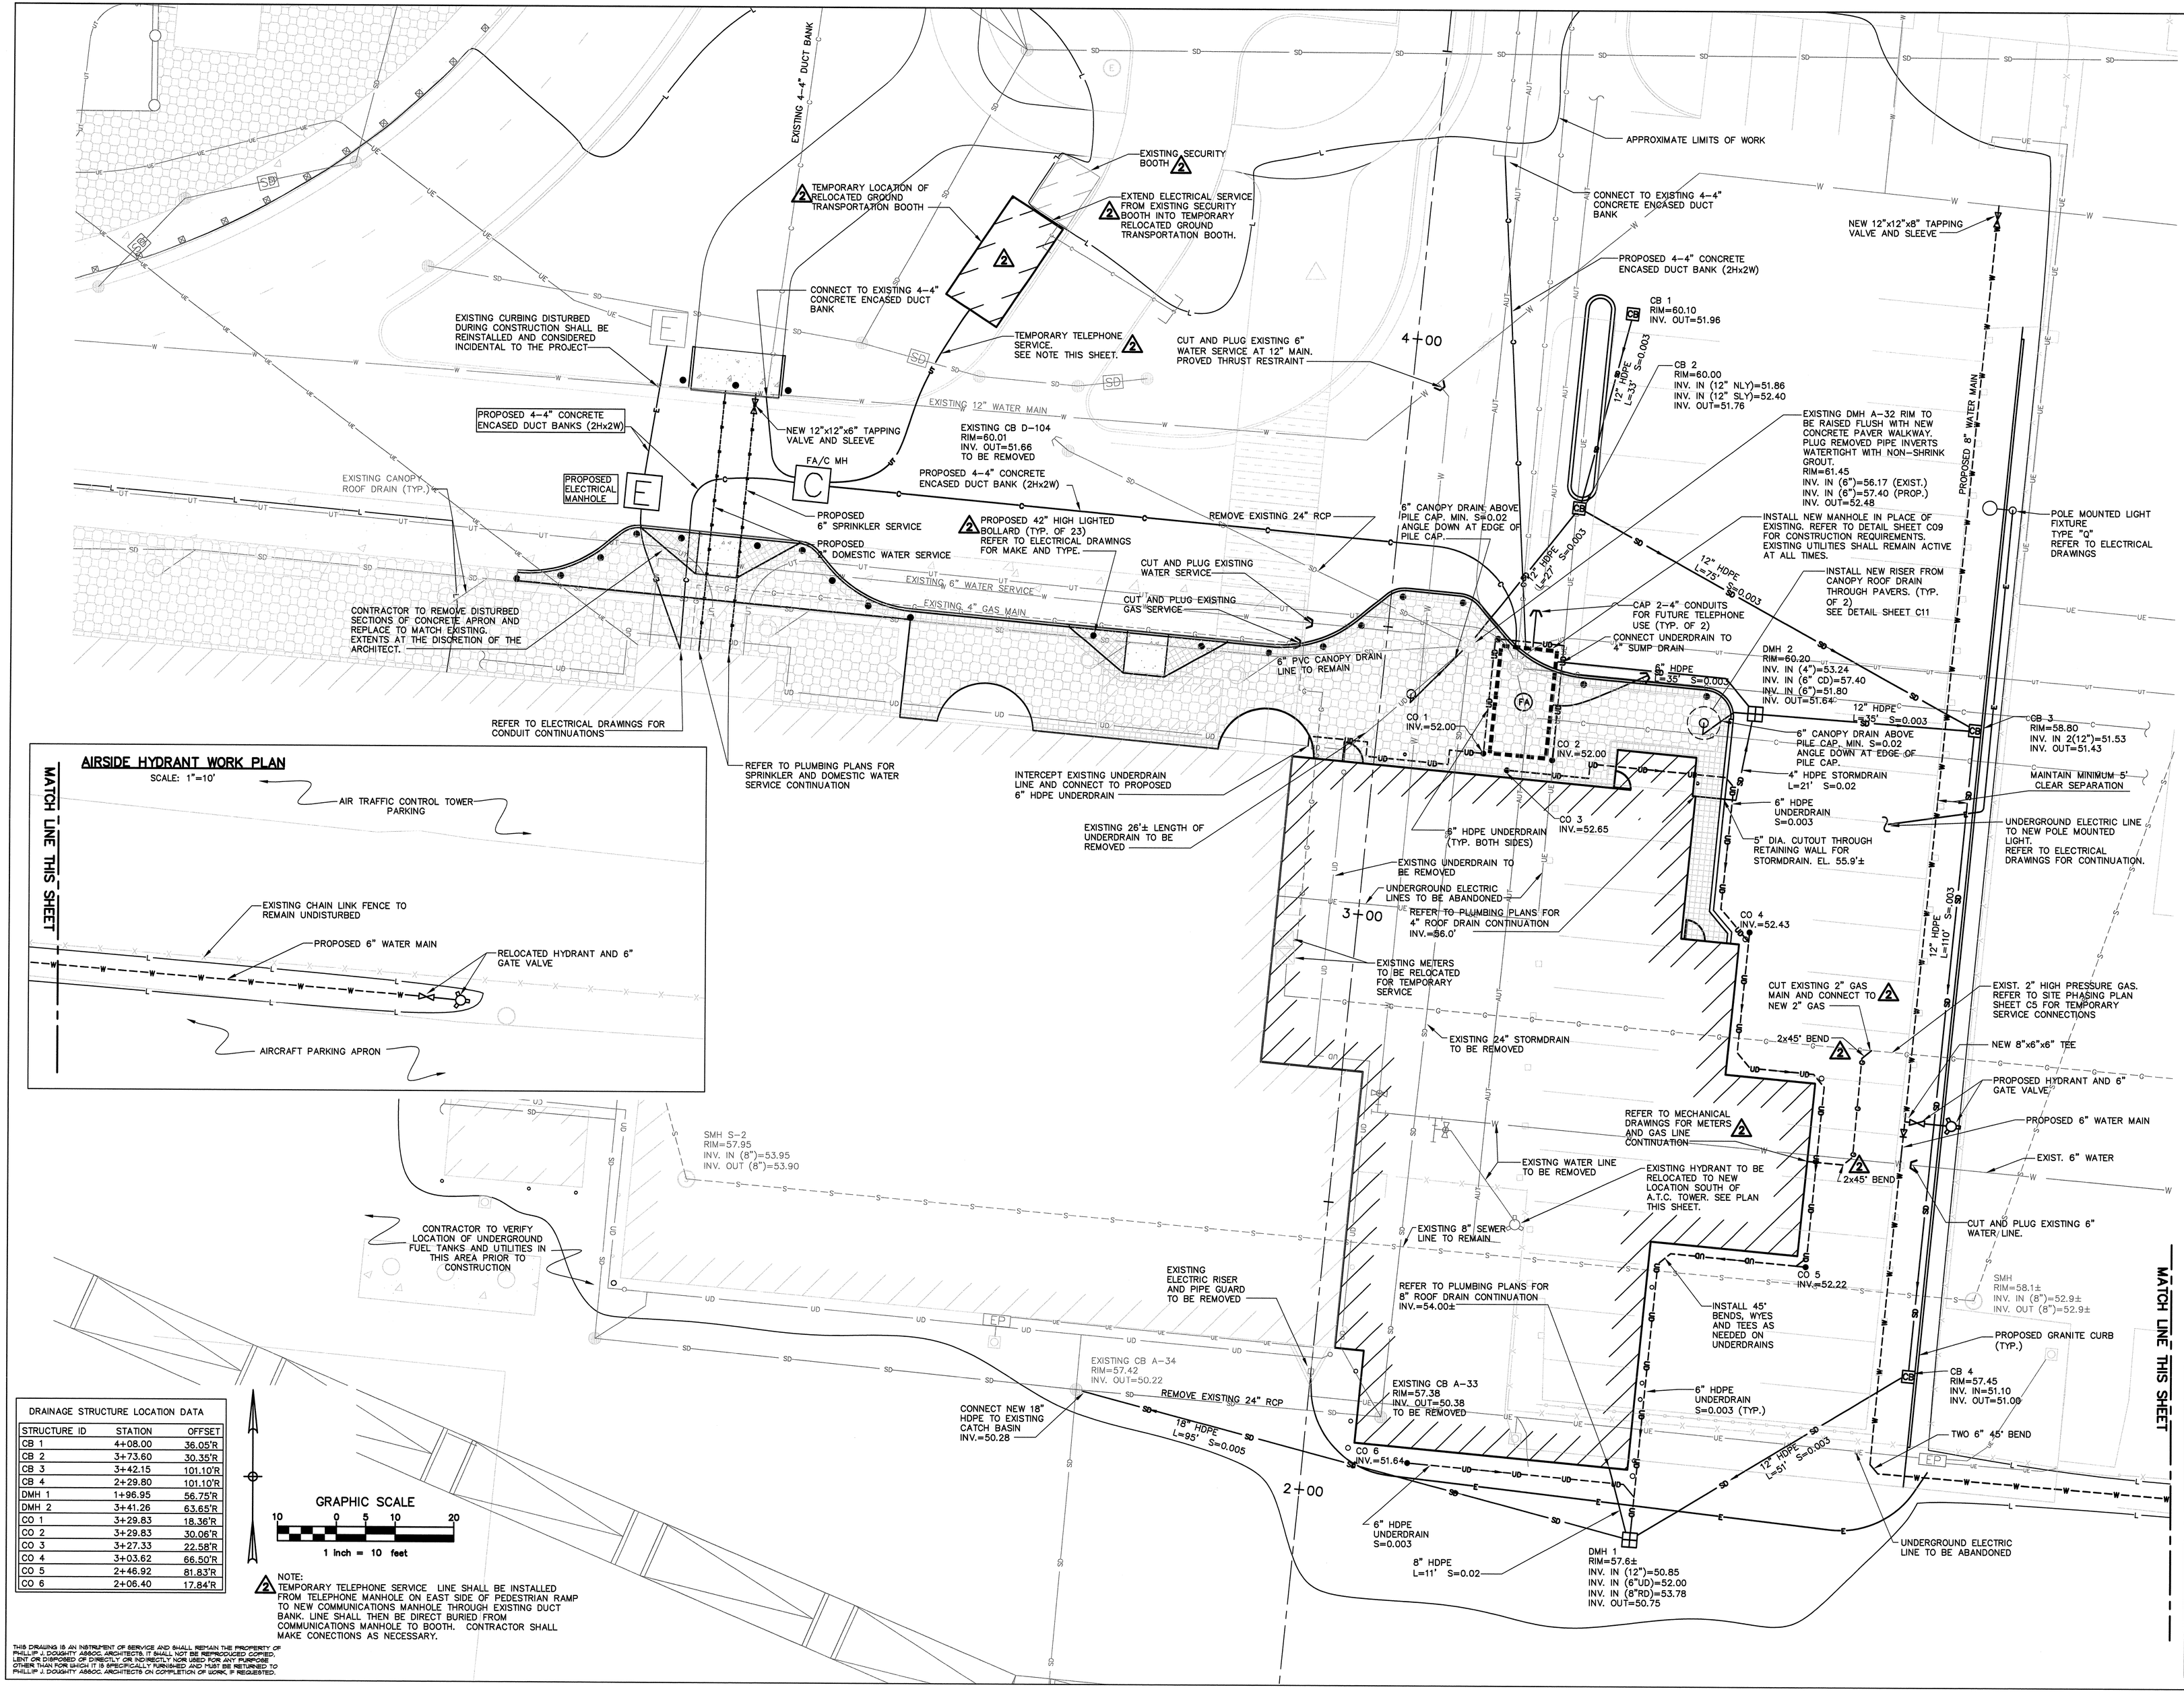

AIRSIDE HYDRANT WORK PLAN

SCALE: 1"=10'

DRAINAGE STRUCTURE LOCATION DATA		
STRUCTURE ID	STATION	OFFSET
CB 1	4+08.00	36.05'R
CB 2	3+73.60	30.35'R
CB 3	3+42.15	101.10'R
CB 4	2+29.80	101.10'R
DMH 1	1+96.95	56.75'R
DMH 2	3+41.26	63.65'R
CO 1	3+29.83	18.36'R
CO 2	3+29.83	30.06'R
CO 3	3+27.33	22.58'R
CO 4	3+03.62	66.50'R
CO 5	2+46.92	81.83'R
CO 6	2+06.40	17.84'R

GRAPHIC SCALE
10 0 5 10 20
1 inch = 10 feet

2 NOTE:
TEMPORARY TELEPHONE SERVICE LINE SHALL BE INSTALLED FROM TELEPHONE MANHOLE ON EAST SIDE OF PEDESTRIAN RAMP TO NEW COMMUNICATIONS MANHOLE THROUGH EXISTING DUCT BANK. LINE SHALL THEN BE DIRECT BURIED FROM COMMUNICATIONS MANHOLE TO BOOTH. CONTRACTOR SHALL MAKE CONECTIONS AS NECESSARY.

THIS DRAWING IS AN INSTRUMENT OF SERVICE AND SHALL REMAIN THE PROPERTY OF PHILLIP J. DOUGHTY ASSOC. ARCHITECTS. IT SHALL NOT BE REPRODUCED, COPIED, LENT OR DISPOSED OF DIRECTLY OR INDIRECTLY NOR USED FOR ANY PURPOSE OTHER THAN FOR WHICH IT IS SPECIFICALLY FURNISHED AND MUST BE RETURNED TO PHILLIP J. DOUGHTY ASSOC. ARCHITECTS ON COMPLETION OF WORK, IF REQUESTED.

Dufresne-Henry
Portland, Maine
Tel. (207) 775-3211 • FAX (207) 775-4434
www.dufresne-henry.com

REVISION	DESCRIPTION	DRAWN	CHECKED	APPR'D	DATE
4	CONFORMED DRAWINGS FOR CONSTRUCTION	DPH	DPH		4/23/04
3	ADDENDUM No. 2	DPH	DPH		3/22/04
2	BID SUBMITTAL	DPH	DPH		FEB. 23, 2004

ADDITIONS AND ALTERATIONS:
EASTERLY EXPANSION OF BAGGAGE CLAIM FACILITY
PORTLAND INTERNATIONAL JETPORT, PORTLAND, MAINE

SITE UTILITY PLAN

SCALE : AS SHOWN
DATE : FEBRUARY 1, 2003
DESIGNED: DPH
DRAWN : DPH
CHECKED: WAS
APPROVED:

PDA Architects
Phillip J. Doughty Assoc. • Architects
362 U.S. Route One, Falmouth, Maine 04105 • 207.781.5346

PROJ. 8100063
SHEET NO. C8 OF