ABBREVIATIONS:

A/C	AIR CONDITIONING
ACPLAS	ACOUSTICAL PLASTER
ACT	ACOUSTIC CEILING TILE
AFF	ABOVE FINISHED FLOOR
AP	ACCESS PANEL
BCE	BOTTOM CHORD EXTENSION
BD	BOARD
BLP	BORROWED LIGHT PANEL
BO	BOTTOM OF
BOF	BOTTOM OF FOOTING
BOS	BOTTOM OF STEEL
BS	BOTH SIDES
BSE	BRICK SHELF ELEVATION
C	CHANNEL
CPT	CARPET
CB	CATCH BASIN; CHALKBOARD
CFM	CUBIC FEET PER MINUTE
CJ	CONTROL JOINT; CONSTRUCTION JOINT
℄	CENTERLINE
CMU	CONCRETE MASONRY UNIT
CT	CERAMIC TILE
CUH	CABINET UNIT HEATER
DF	DRINKING FOUNTAIN
DR	DISPLAY RAIL
DW	DISHWASHER
EF	EXHAUST FAN; EACH FACE
EJ	EXPANSION JOINT
EPDM	ETHYLENE PROPYLENE DIENE MONOMER
EW	EACH WAY
EWC	ELECTRIC WATER COOLER
FB	FLAT BAR
FBO	FURNISHED BY OTHERS
FCO	FLOOR CLEAN-OUT
FD	FLOOR DRAIN
FEC	FIRE EXTINGUISHER CABINET
FF	FINISHED FLOOR; FAR FACE
FO	FRAMED OPENING
FS	FAR SIDE
GB	GRAB BAR
GC	GENERAL CONTRACTOR
GDT	GYPSUM DROP-IN TILE
GWB	GYPSUM WALL BOARD
H	HORIZONTAL
HC	HANDICAPPED; HOLLOW CORE
HM	HOLLOW METAL
HRU	HEAT RECOVERY UNIT
H&V	HEATING AND VENTILATING
HVAC	HEATING, VENTILATING AND AIR CONDITIONING
IF	INSIDE FACE
IJ	ISOLATION JOINT
INV	INVERT
JS	JOIST SUBSTITUTE
L	ANGLE
LLH	LONG LEG HORIZONTAL
LLV	LONG LEG VERTICAL
LP	LIGHTING PANEL
MB	MARKER BOARD
MDO	MEDIUM DENSITY OVERLAY
MO	MASONRY OPENING
MR	MOISTURE-RESISTANT
MUA	MAKE-UP AIR
N	NOSING
NIC	NOT IN CONTRACT
NS	NEAR SIDE
NTS	NOT TO SCALE
OC	ON CENTER
OF	OUTSIDE FACE; OWNER FURNISHED
OFIC	OWNER FURNISHED AND INSTALLED BY CONTRACTOR
OH	OVERHEAD
PA	PUBLIC ADDRESS
PAF	POWDER-ACTUATED FASTENER
℗	PLATE
PLAM	PLASTIC LAMINATE
PLF	POUNDS PER LINEAR FOOT
PP	POWER PANEL
PSF	POUNDS PER SQUARE FOOT
PSI	POUNDS PER SQUARE INCH
PT	PRESSURE
PVC	POLYVINYL CHLORIDE
R	RISER; RADIUS
RB	RESILIENT BASE
RD	ROOF DRAIN
RO	ROUGH OPENING
RR	RUB-RAIL
SACT	SUSPENDED ACOUSTIC TILE CEILING
SC	SOLID CORE
SF	SQUARE FOOT; SUPPLY FAN
SK	SHEAR KEY
SN	SANITARY NAPKIN (DISPENSER)
SP	SPACES
SS	STAINLESS STEEL
T	TREAD
TB	TACK BOARD
T&B	TOP AND BOTTOM
TBM	TEMPORARY BENCHMARK
TCE	TOP CHORD EXTENSION
TJ	TIE JOIST
TO	TOP OF
TOC	TOP OF CONCRETE
TOF	TOP OF FOOTING
TOM	TOP OF MASONRY
TOP	TOP OF PIER
TOS	TOP OF STEEL; TOP OF SLAB
TOW	TOP OF WALL
TP	TOILET PAPER (DISPENSER)
UH	UNIT HEATER
UNO	UNLESS NOTED OTHERWISE
V	VENT PIPE; VERTICAL
VB	VAPOR BARRIER
VCT	VINYL COMPOSITION TILE
VIF	VERIFY IN FIELD
VP	VISION PANEL
VTR	VENT THROUGH THE ROOF
W/	WITH
WC	WATER CLOSER
WF	WIDE FLANGE
WH	WATER HEATER
W/O	WITHOUT
WP	WORKING POINT
WS	WEB STIFFENER
WWF	WELDED WIRE FABRIC

SYMBOLS LEGEND:

- 1 / A6.1 — SECTION
- 1 / A6.1 — DETAIL
- ELEVATION LEVEL
- 2 — REVISION
- A — WINDOW TYPE
- 100A — DOOR NUMBER
- CONFERENCE ROOM / 100 — ROOM NAME / ROOM NUMBER
- A / A6.1 — INTERIOR ELEVATION
- S — CONTINUOUS BACKER ROD AND SEALANT
- 1 / A6.1 — EXTERIOR ELEVATION
- EXISTING WALL – TO REMAIN
- EXISTING WALL TO BE REMOVED. OTHER DASHED ITEMS WITHIN REMOVALS PLANS ARE ALSO TO BE REMOVED.
- NEW WALL / PARTITION
- PROVIDE BLOCKING FOR ALL CABINET ASSEMBLIES AND TOILET ROOM ACCESSORIES AS REQUIRED.
- 1A — WALL TYPE

PROJECT TEAM:

List of Drawings

Dwg. No.	Title
T-1	Title Sheet
C-1.0	Standard Boundary Survey
C-1.1	Existing Condition Site Plan
C-1.2	Site Plan
L-1	Existing Landscaping Site Plan
L-2	Proposed New Landscape Planting Site Plan
G-1.0	Code Plan
A-0.1	Removal Plans
A-1.0	Lower Level Floor Plan
A-1.1	Upper Level Floor Plan
A-2.0	Exterior Building Elevations
A-2.1	North Entry Elevations / Details
A-3.0	Building Sections
A-3.1	East Egress Stair Details
A-3.2	West Egress Stair Details
A-3.3	Building Section at Movable Partition
A-4.0	Interior Elevations
A-4.1	Interior Elevations
A-5.0	Roof Plan and Details
A-6.0	Reflected Ceiling Plans
A-7.0	Door and Frame Schedule
A-7.1	Room Finish Schedule
A-8.0	Elevator Details
A-8.1	Partition Types & Misc. Details
A-8.2	Miscellaneous Details
S-1.0	Floor Framing Plan & Details
S-2.0	Roof Framing Plan & Details
M -1	Lower Level Mechanical
M –2	Upper Level Mechanical
E-1.0	Lower Level Lighting Plan
E-1.1	Upper Level Lighting Plan
ELS1	Lower Level Life Safety Layout
ELS2	Upper Level Life Safety Layout
E -1	Photometric Layout
E -4	Lower Level Electrical Layout
E -5	Upper Level Electrical Layout

Hutchins Funeral Home

660 Brighton Avenue Portland, Maine

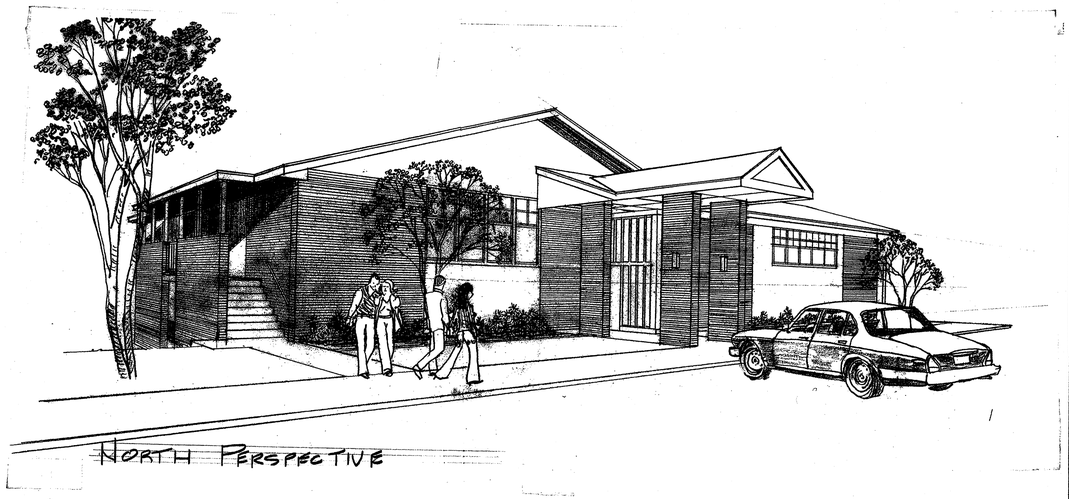

September 18, 2009
Building Permit Submission
Review and Approval
NOT FOR CONSTRUCTION

DLL Associates / Architects
198 Main Street, Suite – C Lewiston, Maine 04240 (207) 344-6611 DLLAIA@AOL.COM
ARCHITECTURAL ENGINEERING • CONSTRUCTION MANAGEMENT • DESIGN BUILD • FACILITY PLANNING

No.	Revisions	Date	By

REGISTERED ARCHITECT
DENIS L. LEMIEUX
NO. 1437
STATE OF MAINE

Project Title
Hutchins Funeral Home
660 Brighton Avenue
Portland, Maine

Drawing Title
Title Sheet

Scale | Ckd.By
Dwn.By | Date

Project No.
0813

Sub Title

Drawing No.
T-1

136837